English


Cold Run Readiness

User & Administrator Guide — from A to Z

Karbala Cement Plant · Yearly shutdown

https://kcp-coldrun-2026.web.app

Edition 2026-10-24

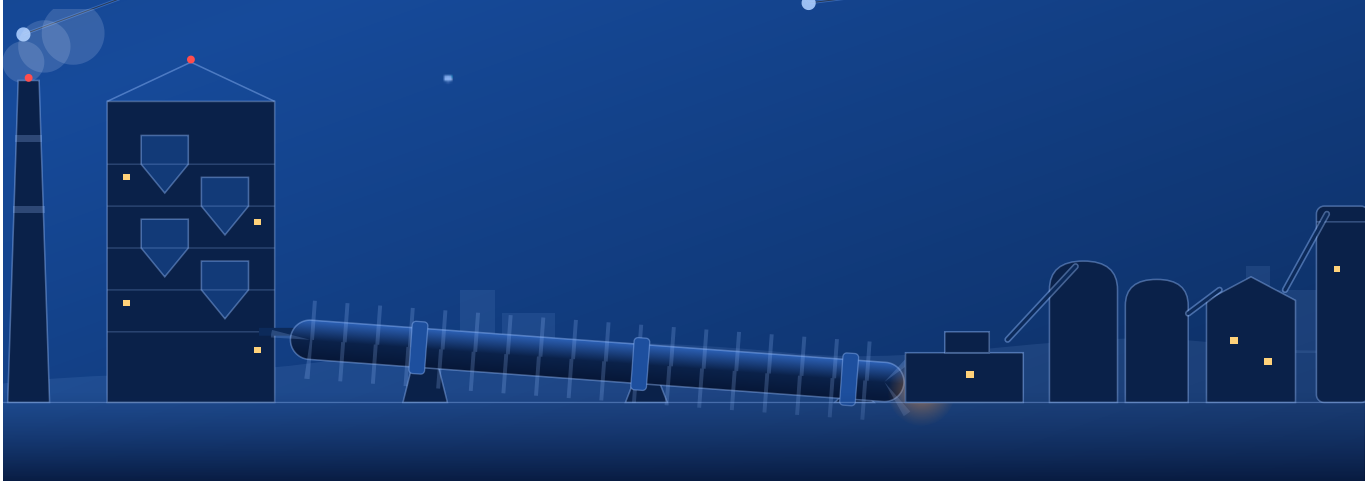

Contents

1 About the platform

2 Getting access

3 Roles

4 The workflow

5 Waiting in your pool & starting an inspection

6 Checking the parts

7 Corrective maintenance

8 Approval

9 Closing the shutdown & archiving

10 Equipment and parts (CSV)

11 Reports and Excel

12 People and access

13 Settings, report e-mails and backup

14 Help inside the platform

15 Good practice

16 Questions and problems

1 About the platform

Cold Run Readiness organises the cold run tests of the yearly shutdown. Every piece of equipment has mechanical, electrical, instrumentation and production parts. Each team checks the parts of its own discipline, Not OK parts go through corrective maintenance, and the Cold Run Test Manager approves the result.


The ten departments are **Raw Mill 1 and 2**, **Kiln 1 and 2**, **Cooler 1 and 2** and **Cement Mill 1 to 4** (the administrator can rename, add or retire them). The platform works in Arabic and English, on phones, tablets and computers, and keeps working without a network connection.

> **Important** Approval documents readiness only. It never authorizes operation, never bypasses interlocks and never replaces LOTO, work permits or the formal operating authorization of the plant.

2 Getting access

For Everyone

Open **https://kcp-coldrun-2026.web.app** in Chrome, Edge or Safari. The administrator adds you first; you then receive an e-mail to set your password.

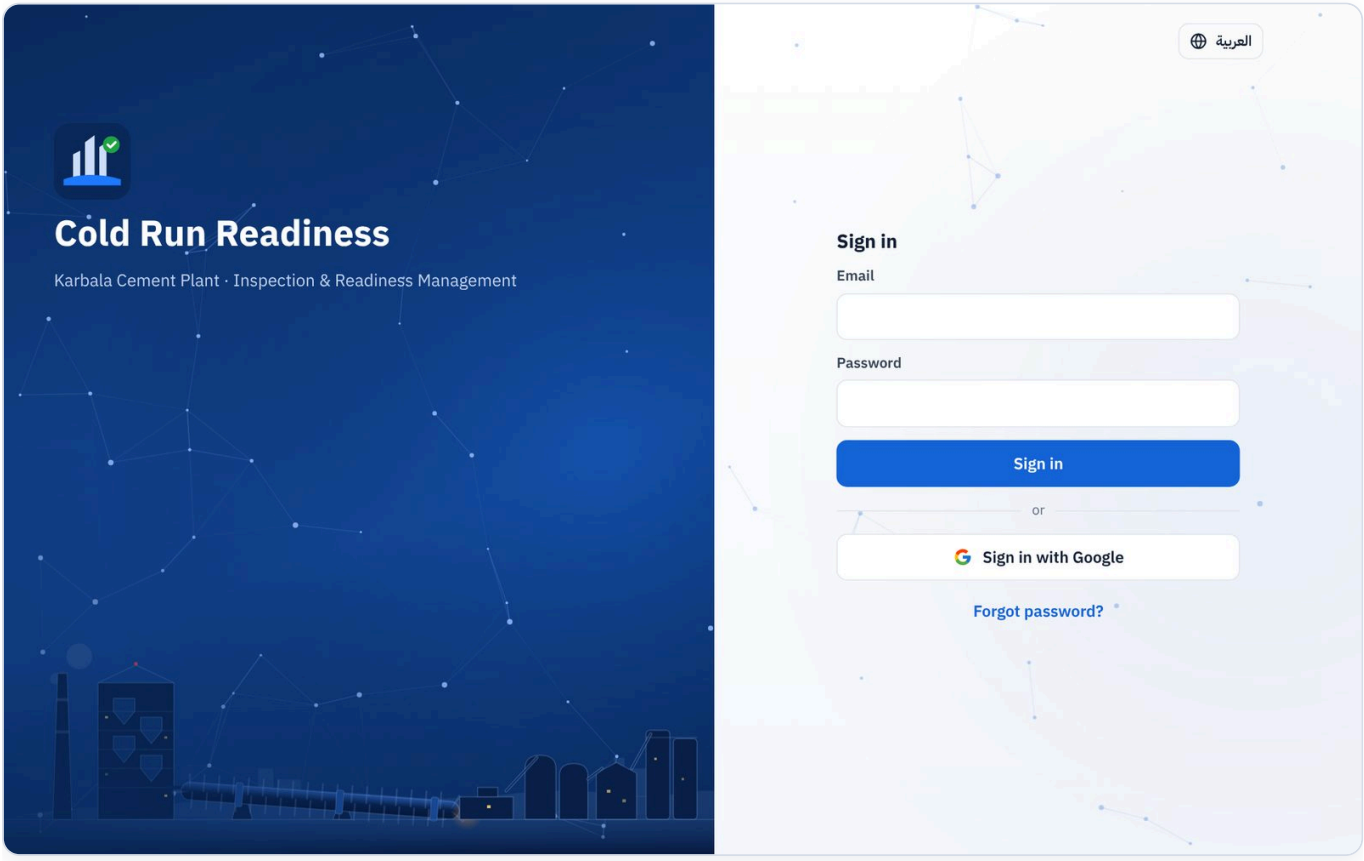


The sign-in page

1. **With a password:** open the e-mail "Reset your password", choose a password of at least 8 characters, then sign in with your e-mail and that password.
2. **With Google:** press **Sign in with Google** and choose the same e-mail the administrator added.
3. **Forgot your password?** Type your e-mail on the sign-in page and press **Forgot password?**.
4. Switch language at any time with the **العربية / English** button at the top.

Install the app

1. **Android / computer:** press **Install** in the pop-up that appears when you open the site.
2. **iPhone / iPad:** press the Share button in Safari, then **Add to Home Screen**.

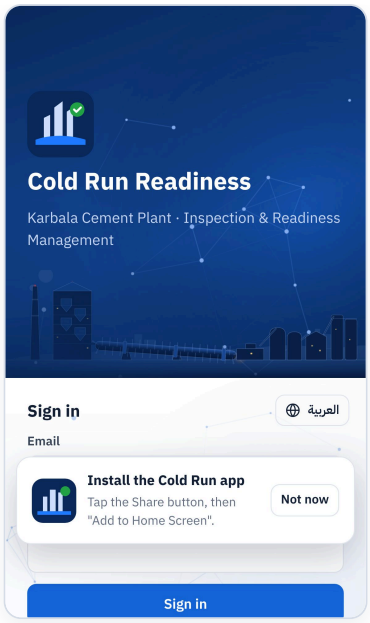


The install pop-up on an iPhone


Tip No signal on site? Keep working. Your changes are kept on the device and sent automatically when the connection returns.

3 Roles

Role	What they do
System Administrator	Everything: users, devices, departments, settings, equipment, approval and archive; renames shutdowns and corrects their year; deletes inspections made by mistake; plan, usage and billing.
Cold Run Test Manager	Sees every team. Approves or sends back inspections, closes the shutdown and archives, manages equipment, sees reports and the audit log, receives the completion reports.
Team Member	Has a discipline (Mechanical, Electrical, Instrumentation or Production) and a department. Sees, starts and checks only the inspections of that discipline in that department, and does the corrective maintenance. No reports, settings or administration — the menu shows **My profile** instead of Settings.

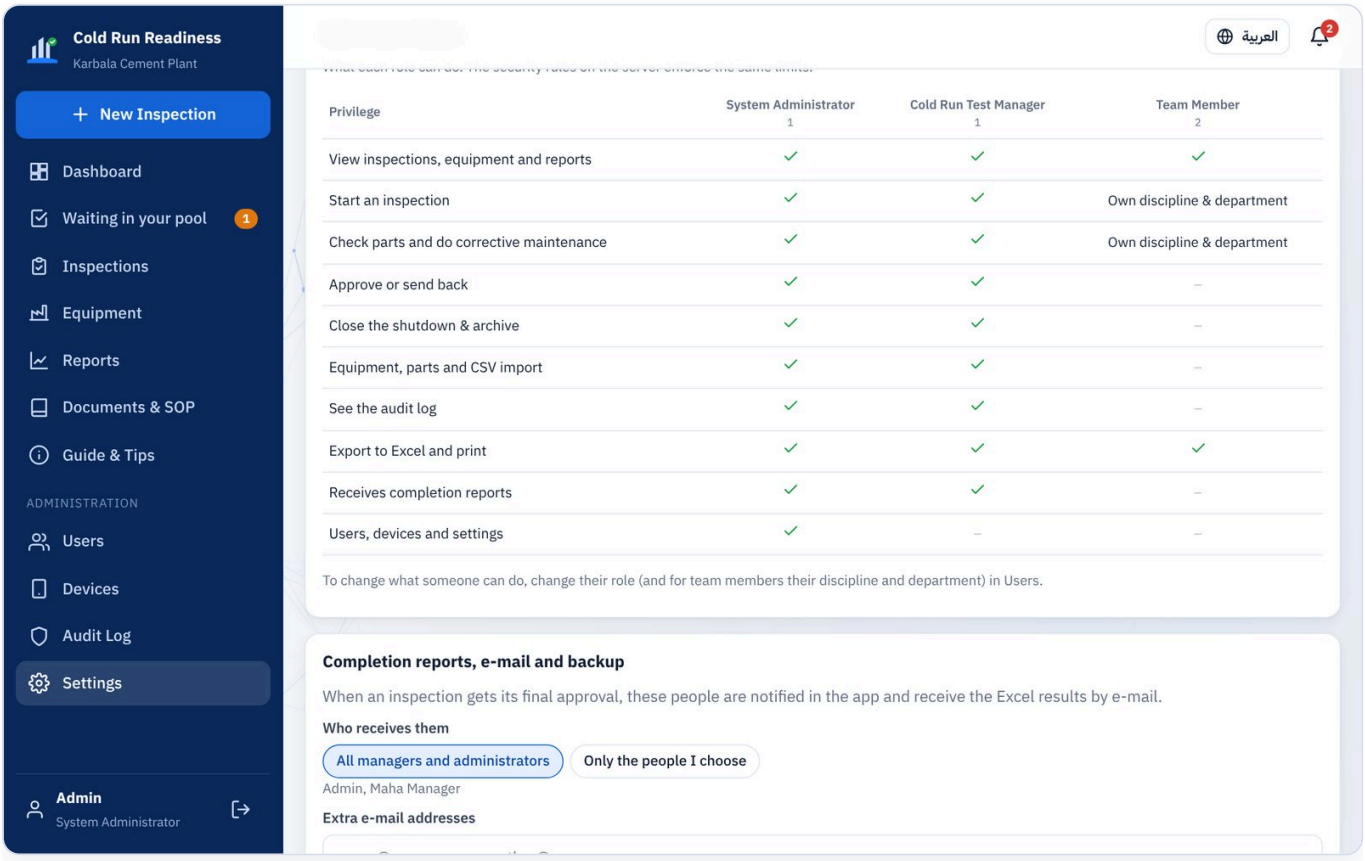

Settings → Roles & privileges

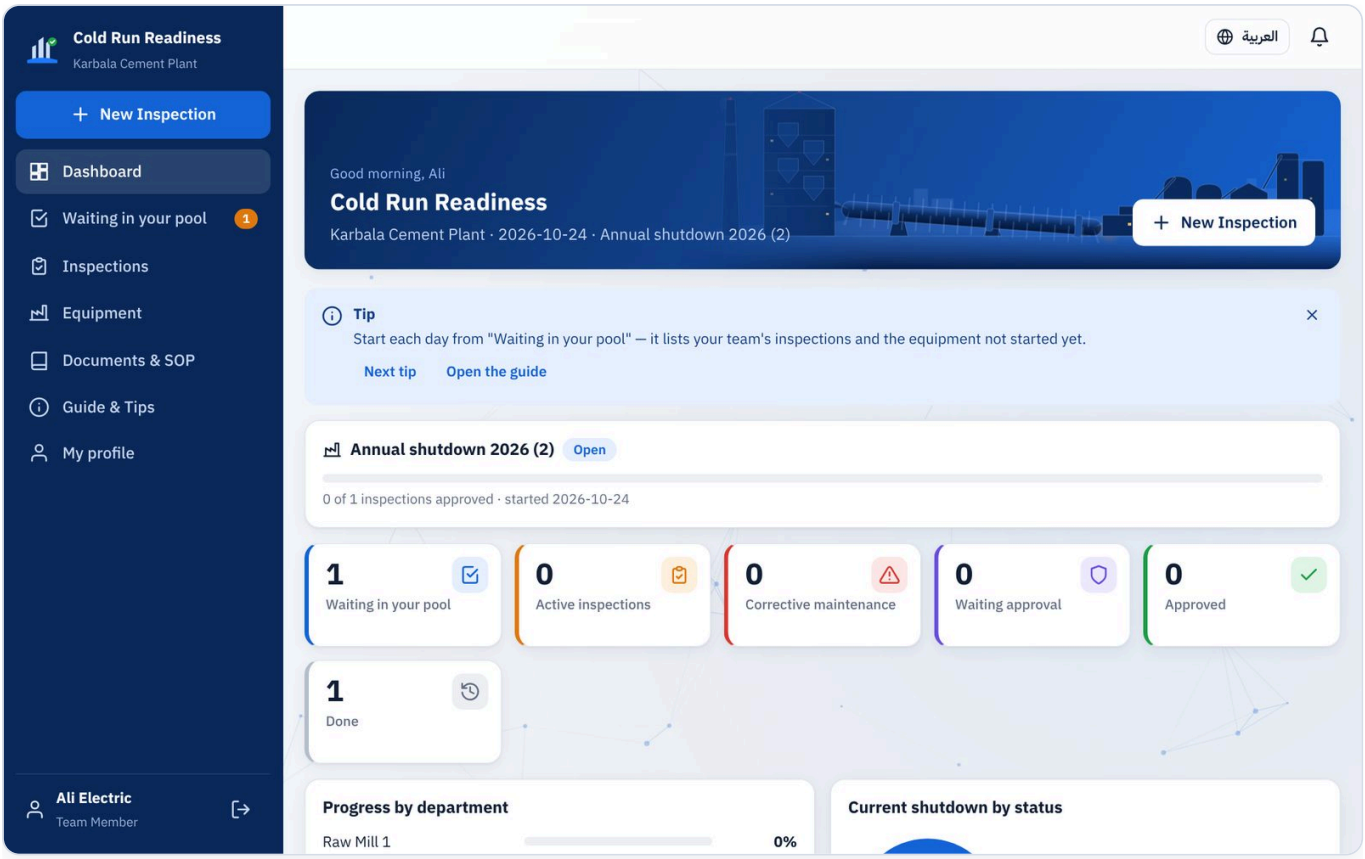


What a team member sees: only their own work, and My profile instead of Settings

The same limits are enforced by the security rules on the server, so they cannot be bypassed from a device. For example, an electrical engineer of Kiln 1 only sees and works on the electrical inspections of Kiln 1; a member without a department works on their discipline in every department.

4 The workflow

Each inspection covers one piece of equipment and one discipline. There is one per equipment and discipline in each shutdown.

Stage	What happens
New Inspection	A team member (or the manager) starts it for an equipment. The title is the equipment name.
Waiting in pool	The team checks every part: OK or Not OK. Then presses Submit.
Active · Corrective maintenance	At least one part was Not OK. A work order number is required; the team repairs the part and marks it Fixed.
Active · Waiting approval	Everything is OK or fixed. The Cold Run Test Manager reviews it.
Active · Approved	Approved. Management is notified and receives the Excel results.
Done	When all inspections are approved, the manager closes the shutdown: everything moves to Done and the active count goes back to 0. The next shutdown keeps the same year until the administrator changes it.

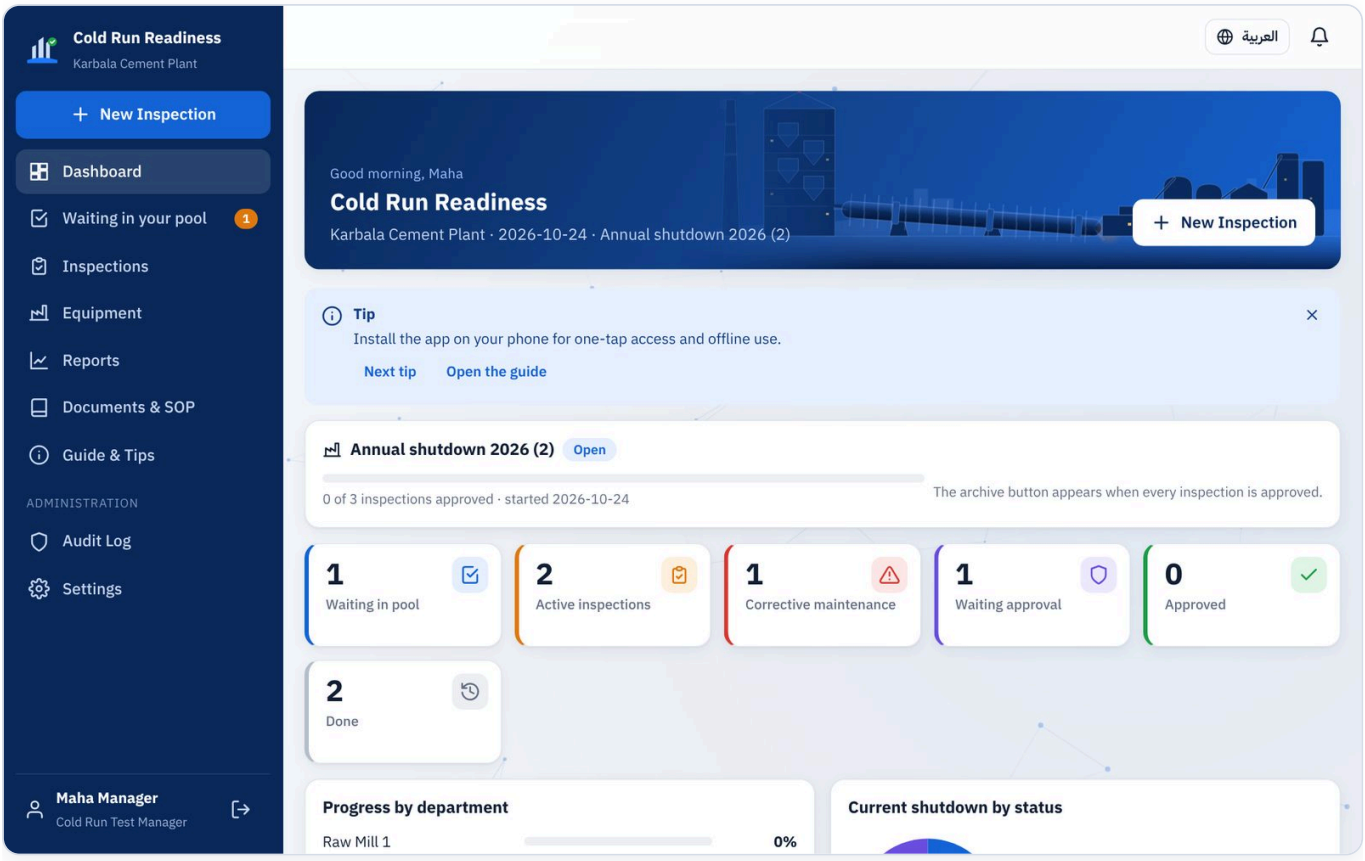


Dashboard: the plant banner, the shutdown, your pool, the active inspections and Done

5 Waiting in your pool & starting an inspection


For Team members

Waiting in your pool shows everything for your team (discipline + department): inspections to check, Not OK parts to fix, and the equipment nobody has started yet.

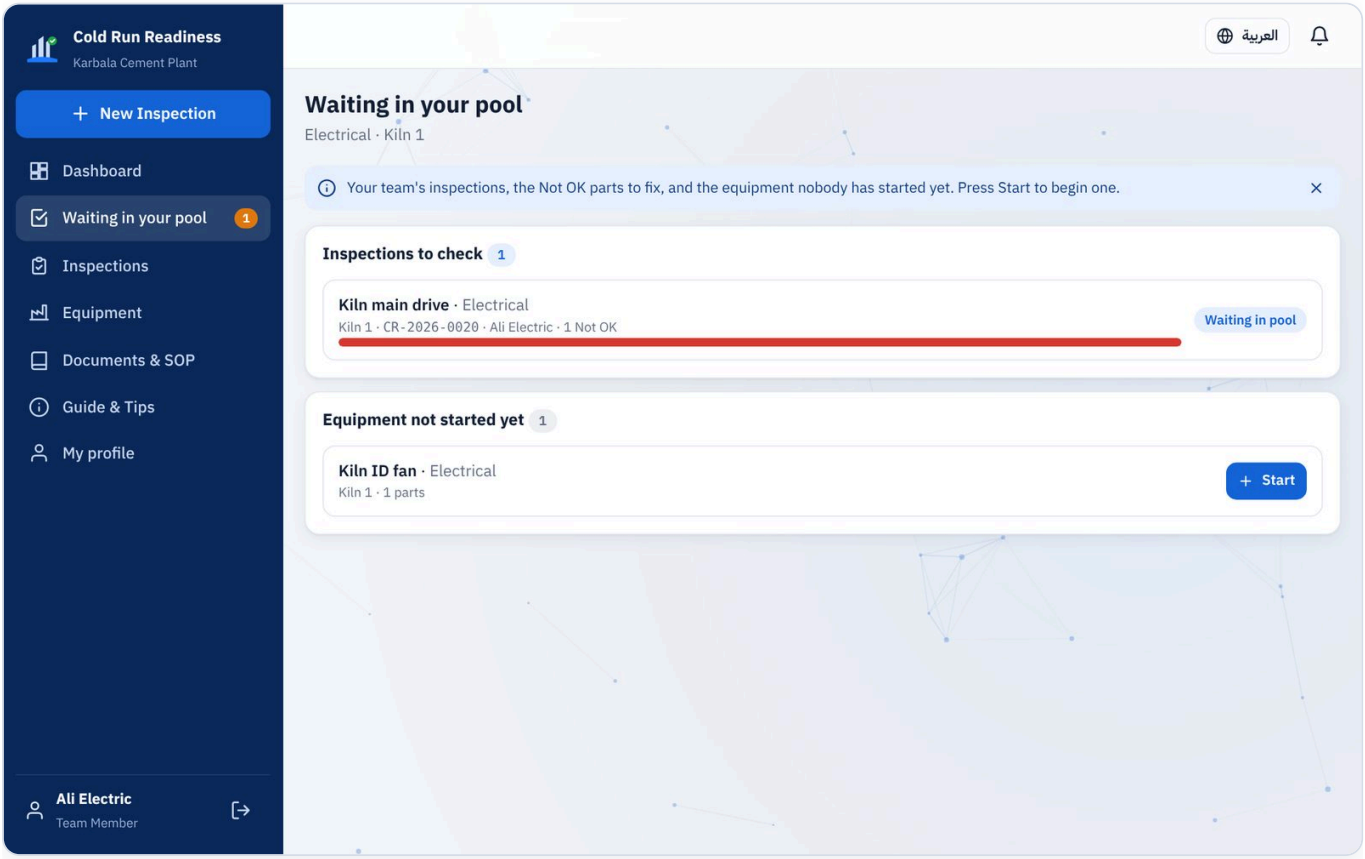

Waiting in your pool, with the equipment not started yet

1. Press **Start** next to an equipment — or use **New Inspection** and choose the equipment.
2. Your department and discipline are filled in for you; the title is the equipment name and the parts of your discipline are listed.
3. Press **Create inspection**. If your team already started it, the existing one opens instead.

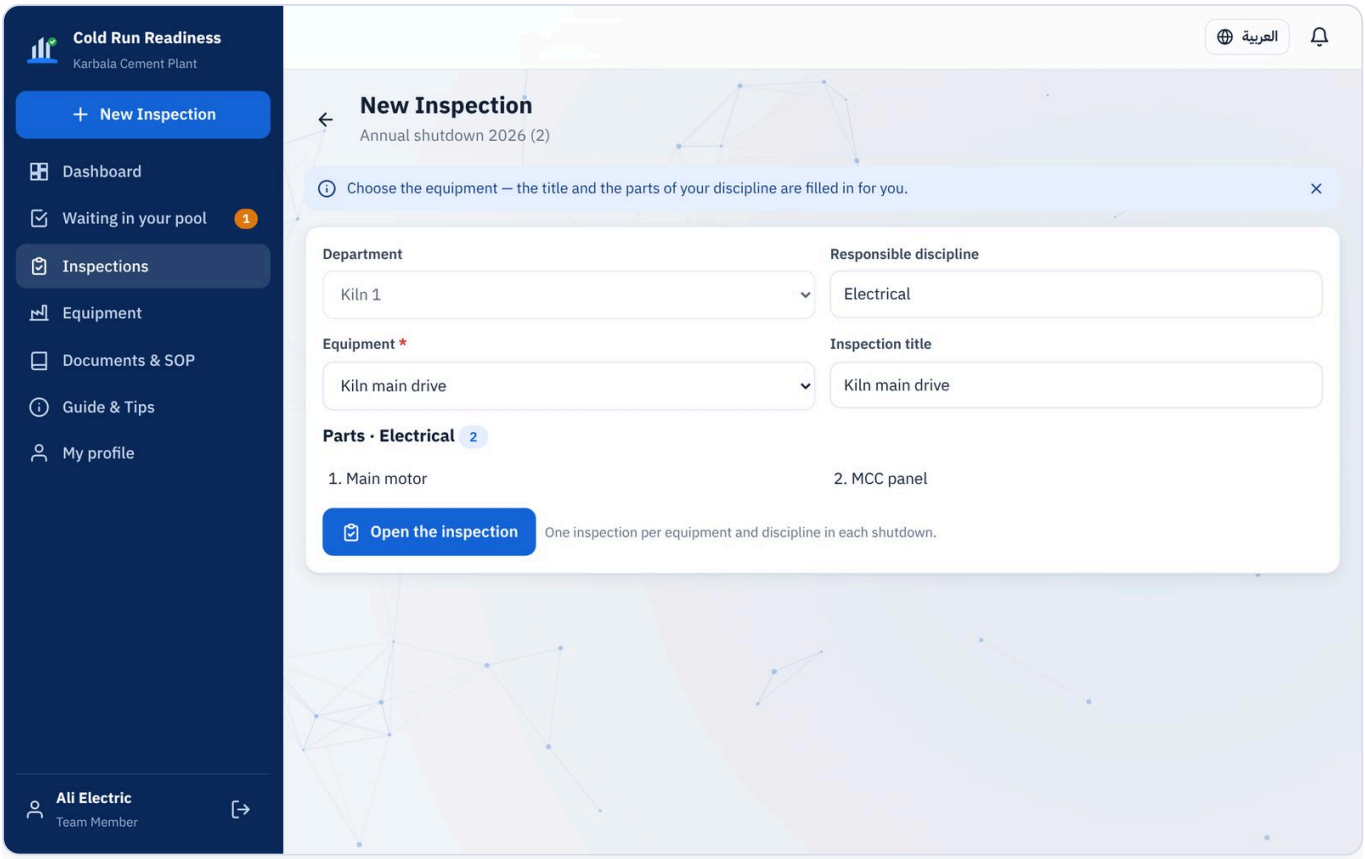


New Inspection


6 Checking the parts

For Team members

1. For each part press ✓ (OK) or ✕ (Not OK).
2. Not OK asks for a short description of the problem. Add a photo with the camera button, then **Save as Not OK**.
3. Chose wrongly? Tap the highlighted ✓ again to clear it. Tapping a highlighted ✕ asks first, because it removes the note and photo; use **Edit** to change only the note.
4. Colleagues of the same team can work on the same inspection; everything is saved as you go.
5. When every part is checked, press **Submit inspection**. With a Not OK part the platform asks for the **work order** number raised in the maintenance system (required), then the inspection goes to **Corrective maintenance**; otherwise to **Waiting approval**.

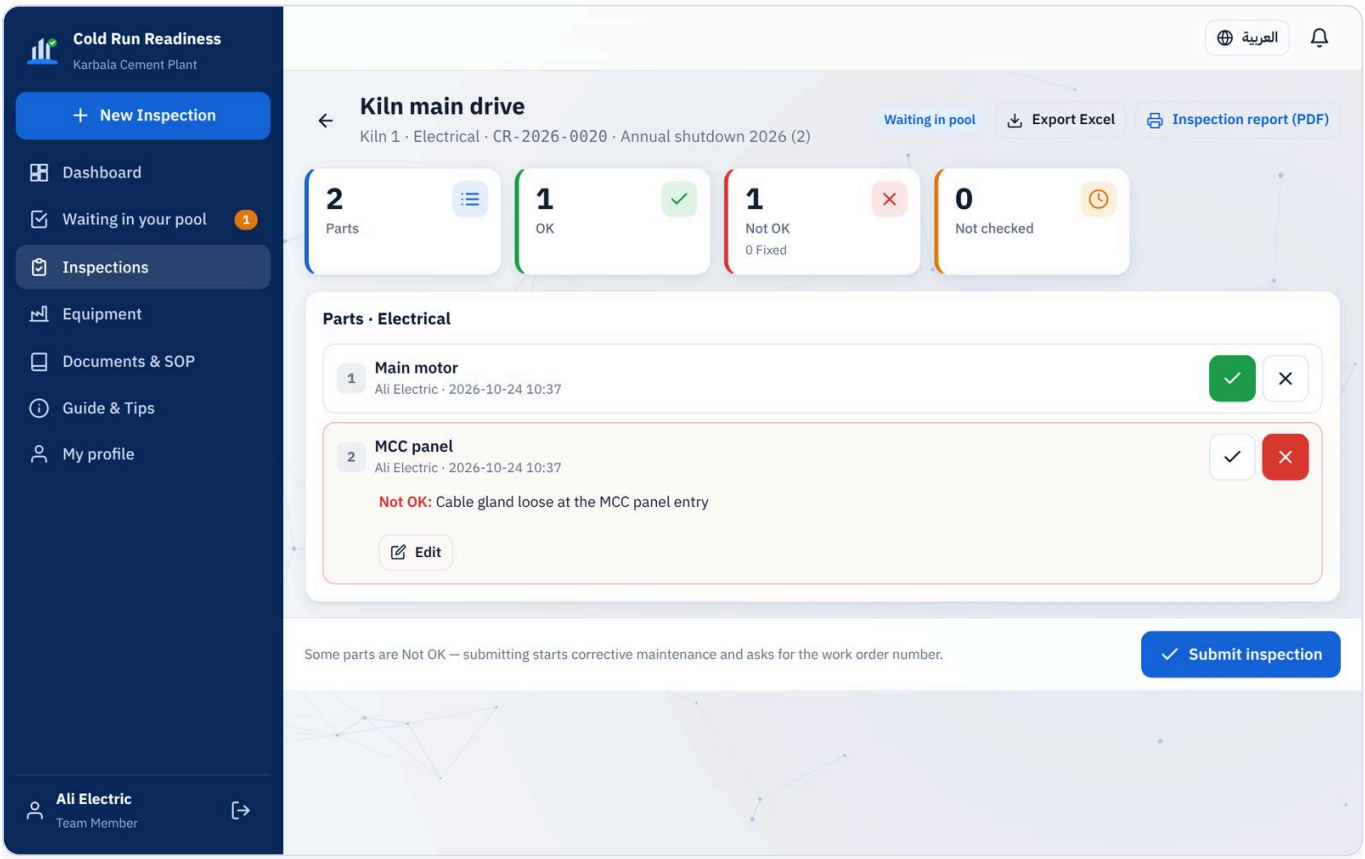

Parts checked: one OK, one Not OK with its description and photo

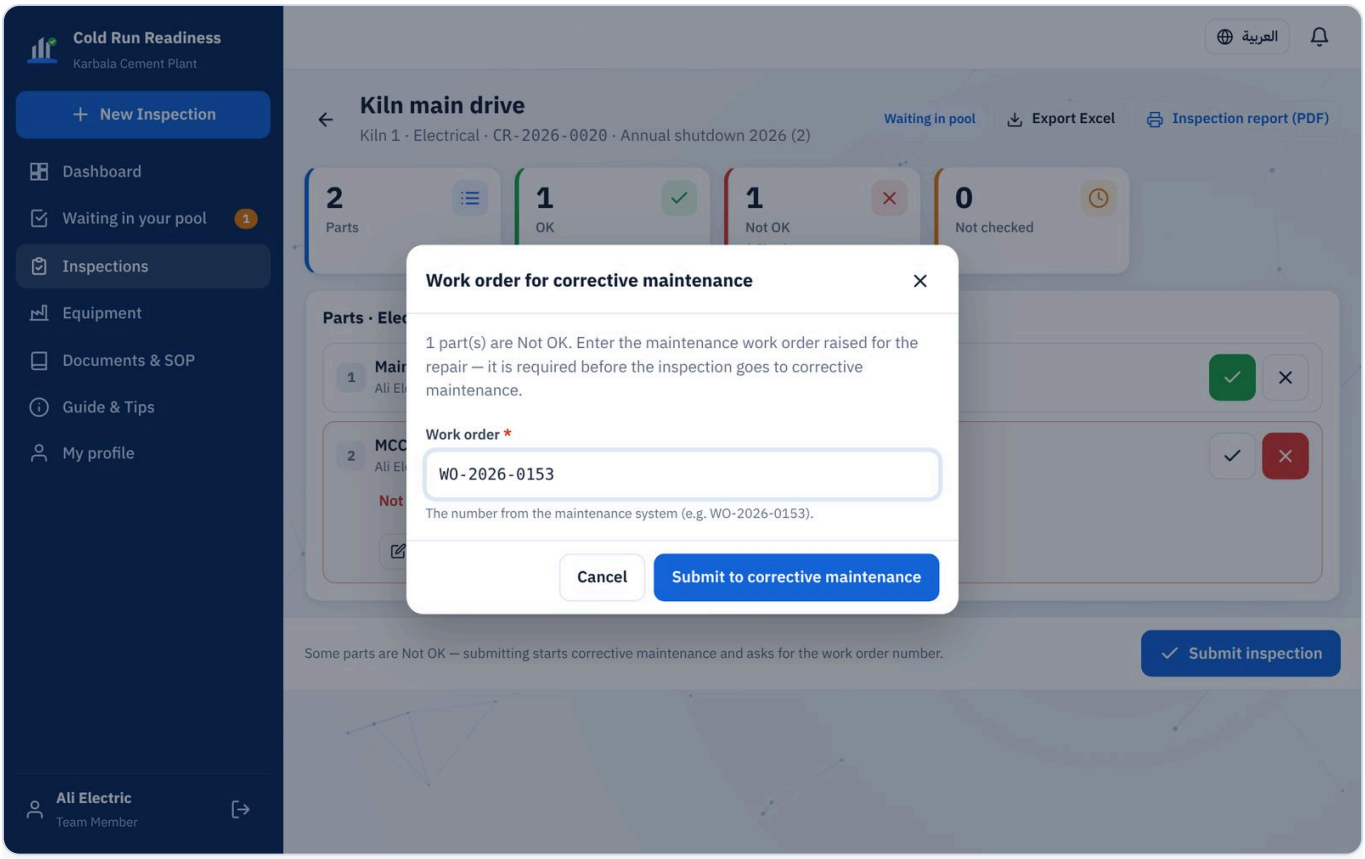


Submitting with a Not OK part: the work order number is required

Tip Add a photo to every Not OK part — it saves time for the repair and for the approval.

7 Corrective maintenance

For Team members

1. The inspection is in **Waiting in your pool** under **Corrective maintenance**, with its **work order** number at the top. Wrong number? Press **Edit** next to it (possible until the inspection leaves corrective maintenance).
2. After the repair, open the Not OK part and press **Mark fixed**. Write what was done and add an "after" photo.
3. When the last Not OK part is fixed, the inspection moves to **Waiting approval** automatically.

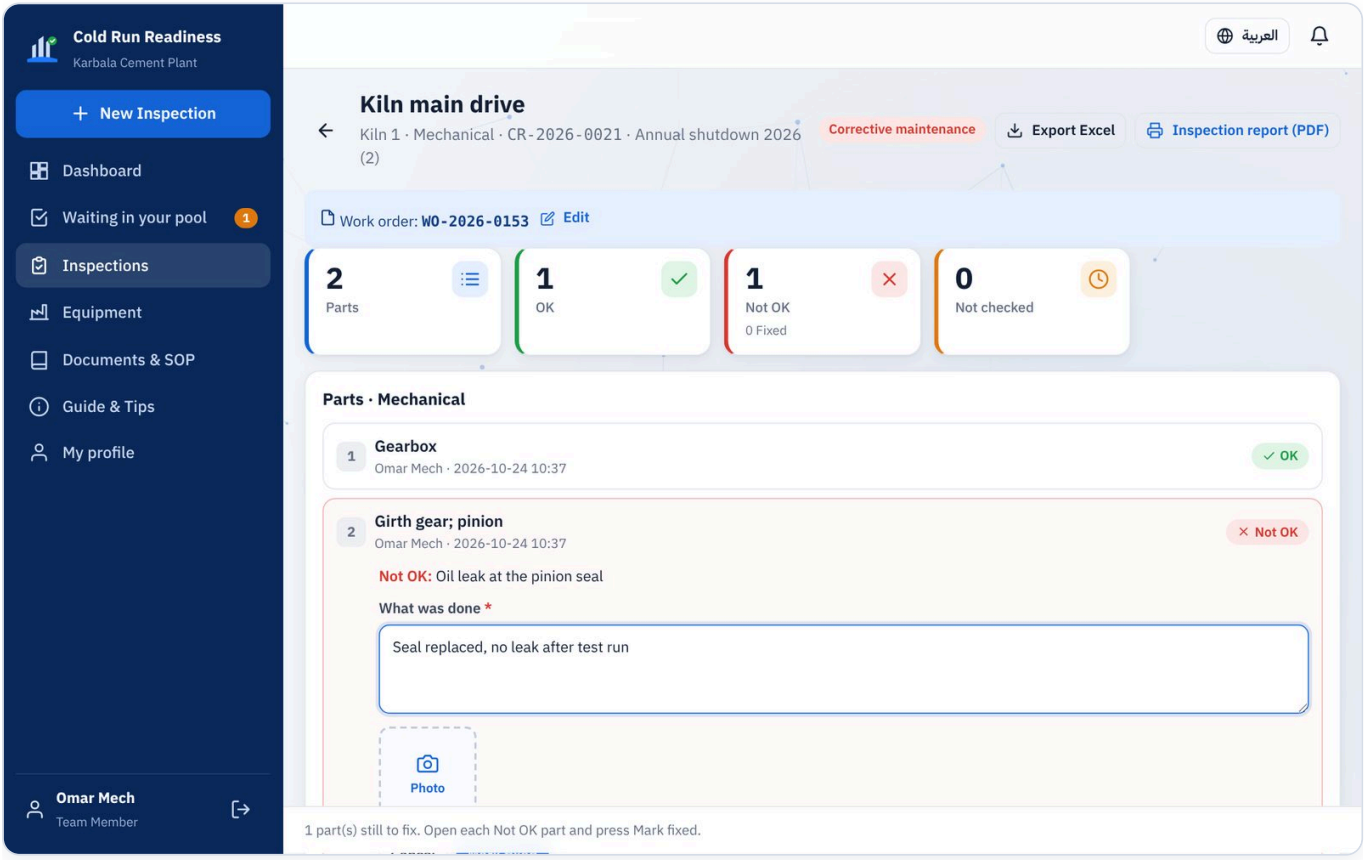


Corrective maintenance: the problem and Mark fixed

8 Approval

For Cold Run Test Manager, administrator

1. **Waiting in your pool** (or Inspections → Active → Waiting approval) lists what needs you.
2. Open the inspection and review the parts, the problems, the fixes and the photos.
3. Press **Approve** (an optional comment), or **Send back** with a reason — it returns to the team's pool and they see your reason.
4. On approval the report recipients are notified in the app and, when the e-mail service is connected, receive the Excel results.

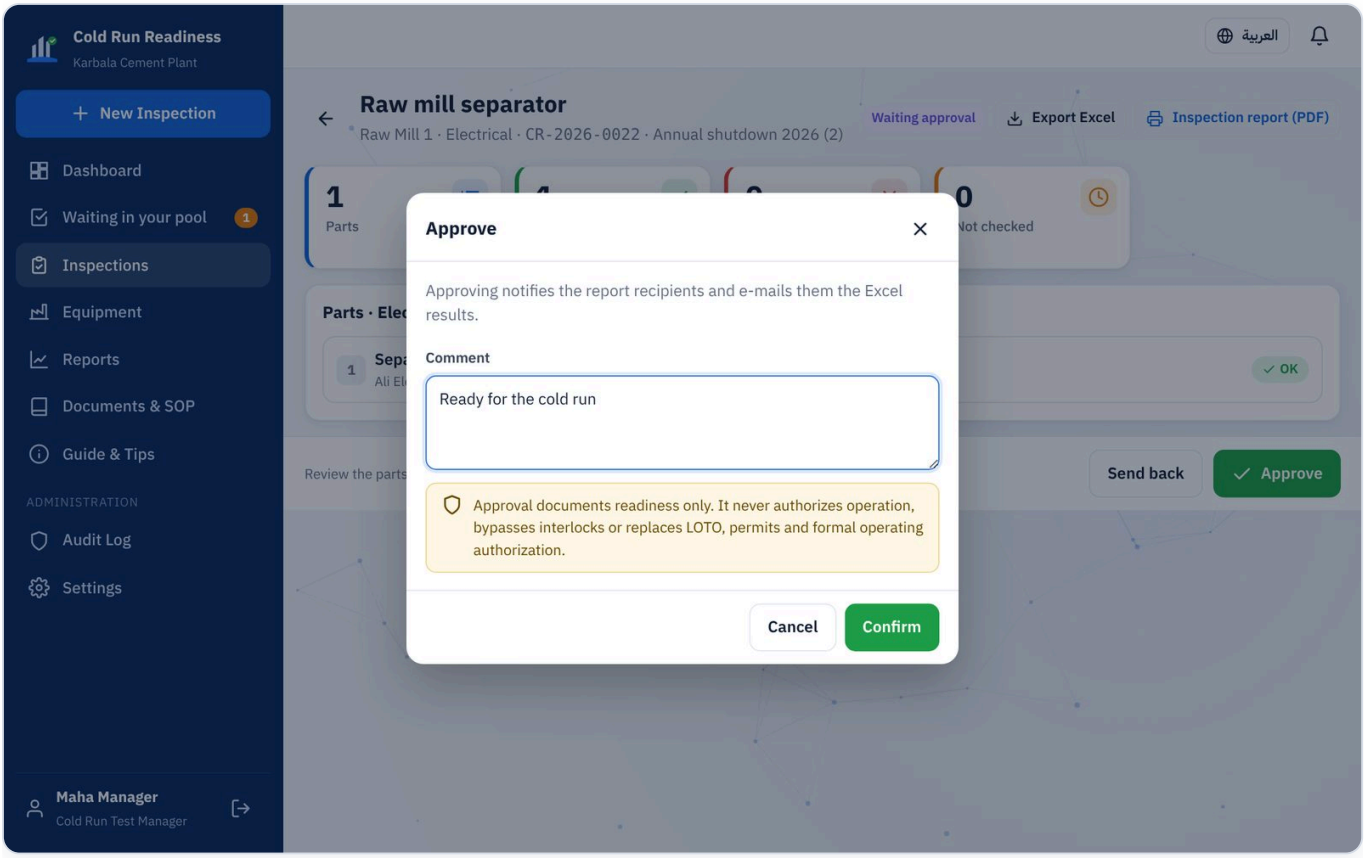

Approving an inspection


9 Closing the shutdown & archiving

For Cold Run Test Manager, administrator


The shutdown card on the Dashboard and Inspections shows how many inspections are approved. When **every** inspection of the shutdown is approved, the button **Close shutdown & archive** appears.

1. Press **Close shutdown & archive** and confirm.
2. All approved inspections move to **Done**, the active count goes back to **0**, and the next shutdown starts with the **same year** — the administrator sets the new year and name by hand (**Edit** on the shutdown card).
3. Done inspections stay available: Inspections → Done, filter by shutdown, export to Excel.

> **Tip** Administrators can rename a shutdown or project, or correct its year: **Edit** on the shutdown card, or **Settings → Shutdowns & projects** for past ones. The new name appears on all its inspections, reports and exports.

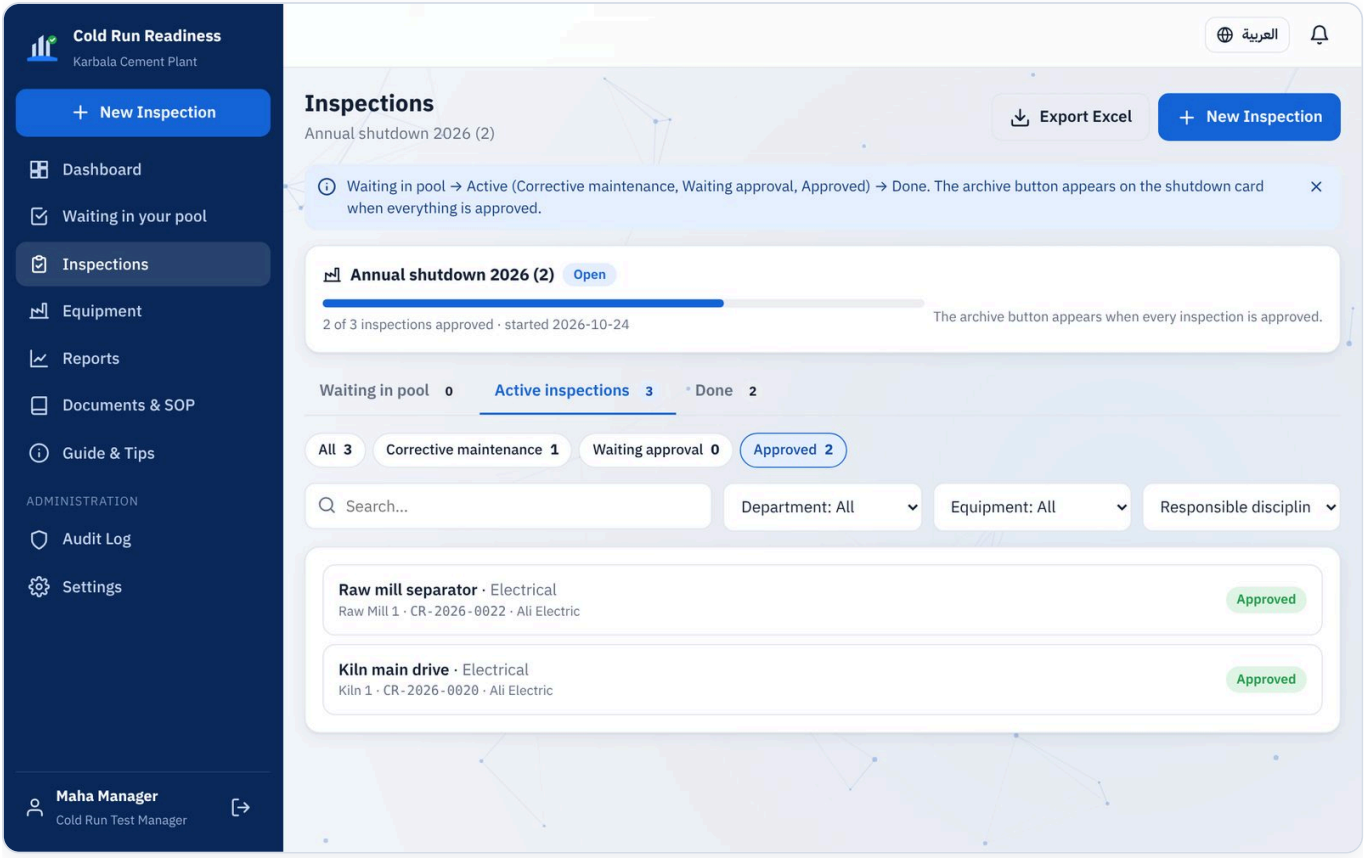

Everything approved: the archive button on the shutdown card

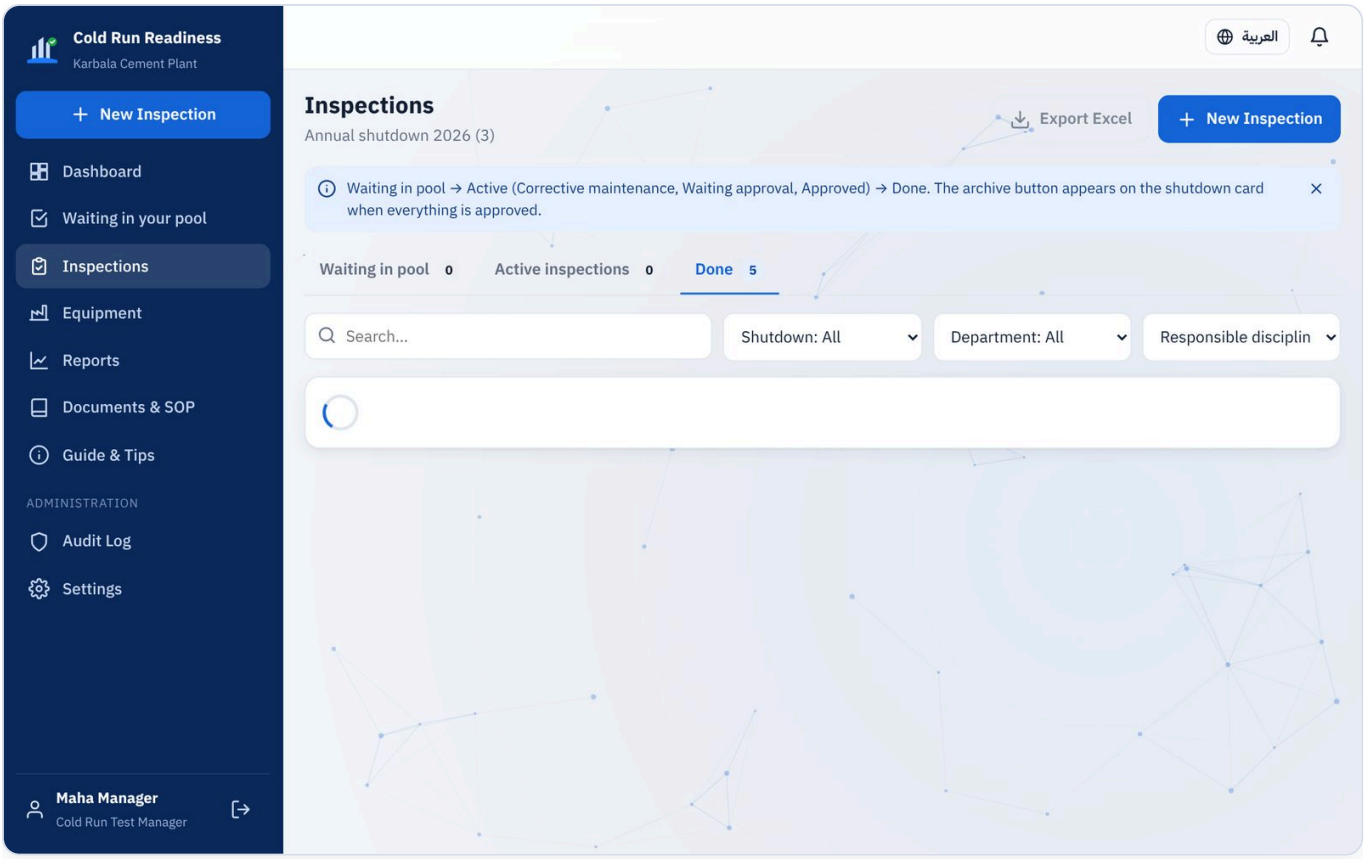


Inspections → Done

10 Equipment and parts (CSV)

For Cold Run Test Manager, administrator

1. **Equipment → Download CSV**. You get the current list (or an example when empty).
2. Open it in Excel and fill **one row per part**: Department, Equipment, Part type, Part. Part type is Mechanical, Electrical, Instrumentation or Production (Arabic names work too).
3. Save as **CSV UTF-8** and press **Upload CSV**.
4. Check the preview — new and updated equipment, and any rows with problems — then press **Import**.


Department	Equipment	Part type	Part
Kiln	Kiln main drive	Electrical	Main motor
Kiln	Kiln main drive	Mechanical	Gearbox
Raw Mill	Raw mill separator	Instrumentation	Speed sensor

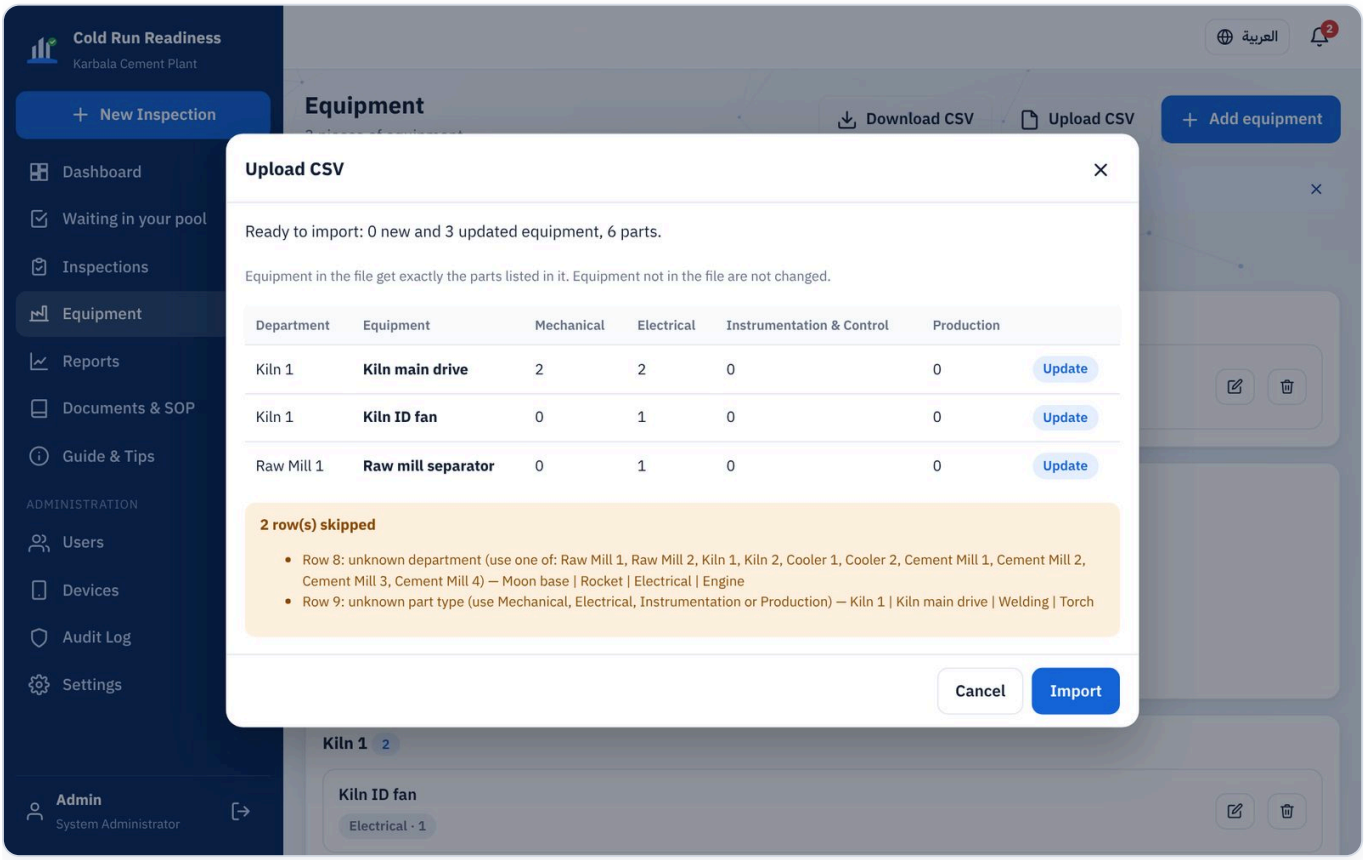

Upload preview

Important Equipment in the file get exactly the parts listed in it; equipment not in the file are not changed. Uploading the same file again updates — it never duplicates.

For one change, press the pencil next to an equipment: name, department and one part per line for each discipline.

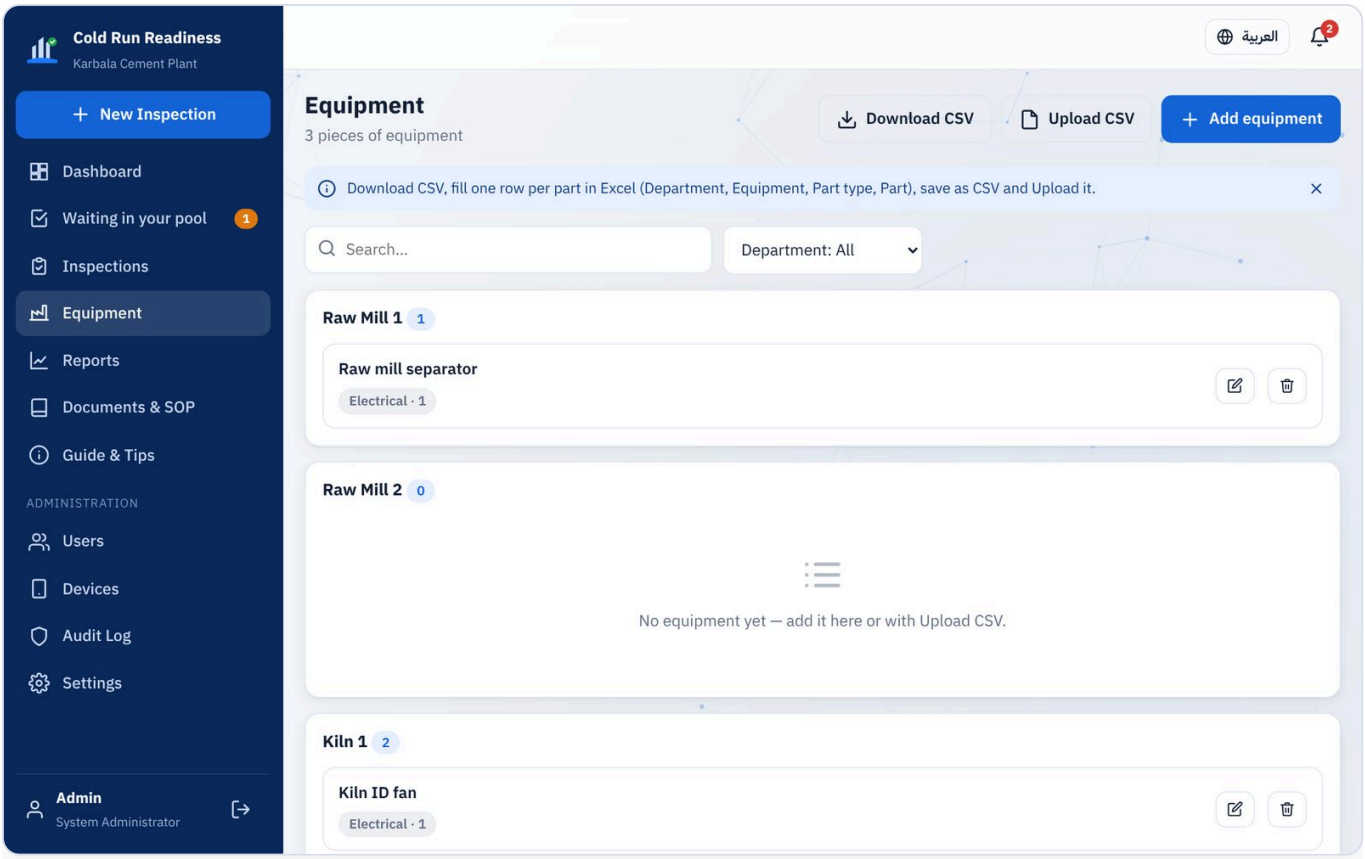


Equipment by department

11 Reports and Excel

For Cold Run Test Manager, administrator

1. Open **Reports** and choose: overview by department, by discipline, Not OK parts & corrective maintenance, equipment not started, all inspections, or work per person.
2. Choose the shutdown and any filters (department, equipment, discipline, status).
3. Press **Export Excel**. The file holds exactly what you see, with the filters written at the top.

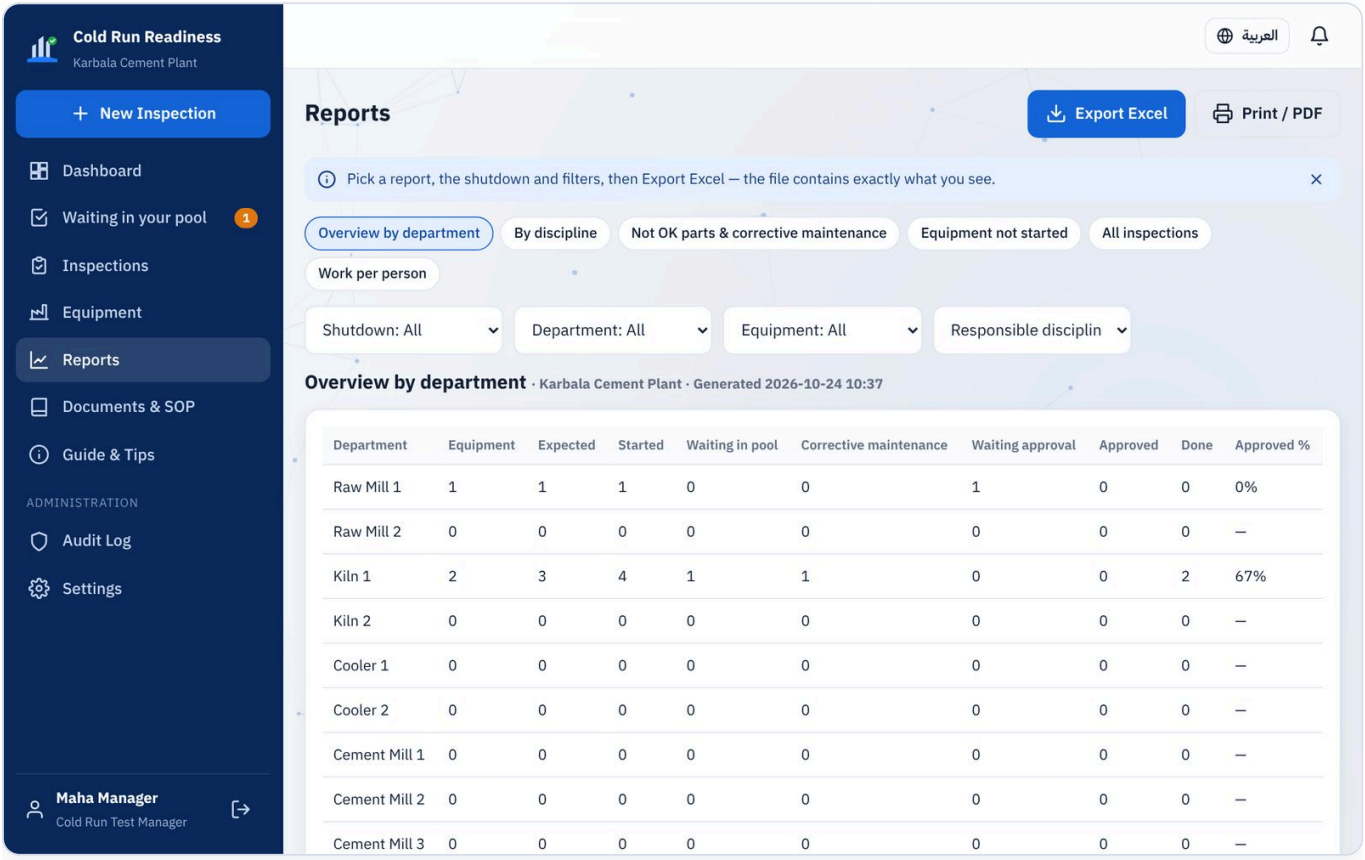


Reports

Every inspection also has **Export Excel** (summary and parts) and **Inspection report (PDF)** for printing and signatures.

12 People and access

For Administrators

1. **Users** → **Add user**: name, e-mail and role. For a **Team Member** also choose the discipline and the department.
2. Leave the password empty: they receive an e-mail to set it, or simply use **Sign in with Google** with that e-mail.
3. Change a role, discipline or department with the pencil. When someone leaves, press **Deactivate** — their history stays.
4. **Devices**: revoke a lost or shared phone and it is signed out immediately.
5. **Departments** (Settings): rename in English and Arabic, change the order, add a department, or retire one — retired departments disappear from pools and menus but their history stays.
6. **Delete an inspection** made by mistake: open it and press **Delete** (administrators only). Its photos are removed too; the deletion stays in the audit log and cannot be undone.

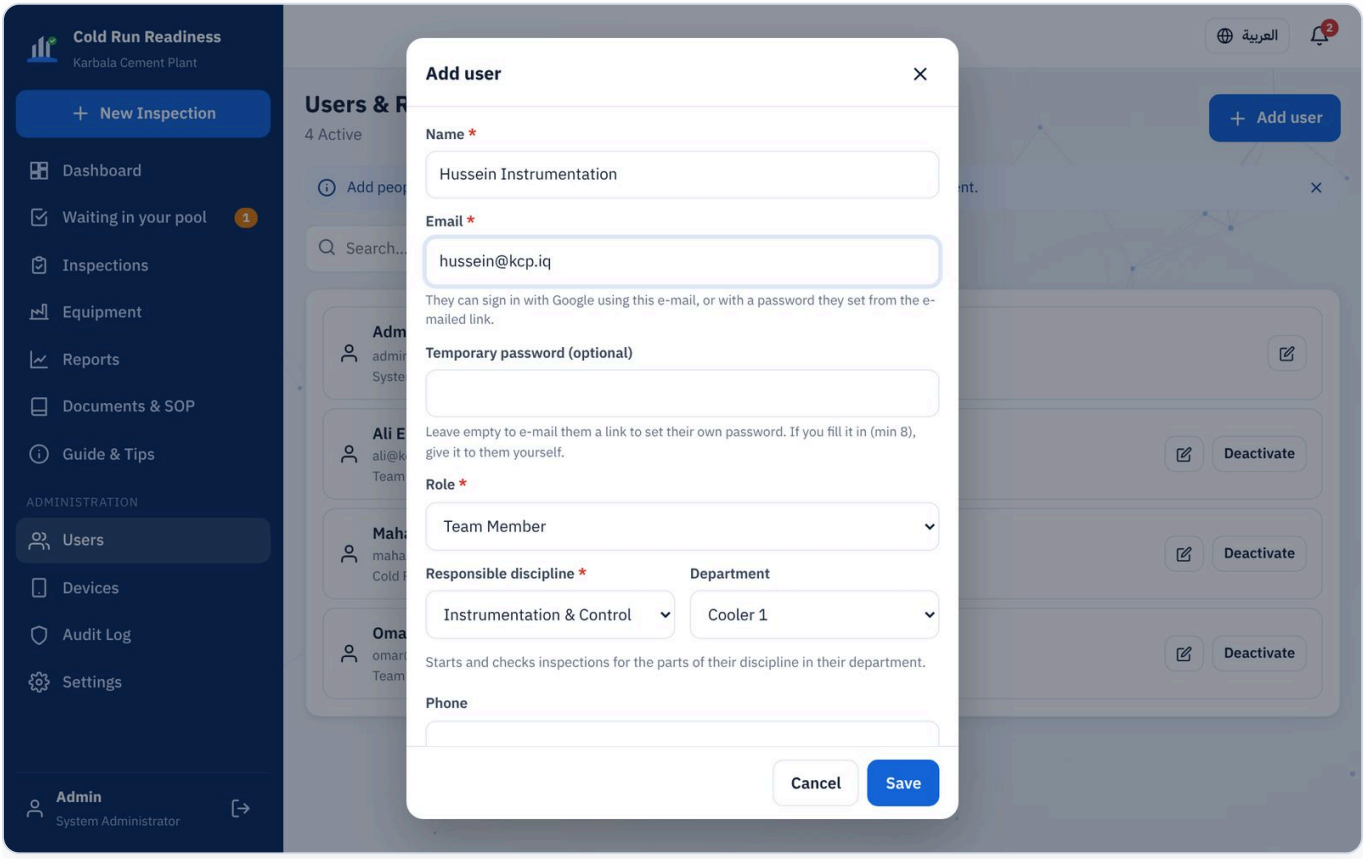

Adding a team member

13 Settings, report e-mails and backup


For Administrators

1. **Who receives the reports:** all managers and administrators (default), or only the people you tick, plus extra e-mail addresses.
2. **Backup e-mail:** the weekly Google Drive backup folder is shared with it.
3. **E-mail & backup service:** paste the service address once and press **Test** — a test e-mail is sent to you and the list of recipients is shown.


Free plan, usage alerts and billing

The platform runs on the free Firebase plan: 50,000 loads, 20,000 saves and 20,000 deletes per day (reset at about 10–11 am Baghdad time) and 1 GB of data. **Settings → Plan & billing** shows today's use. Administrators receive an e-mail at **25%, 50%, 75%, 90% and 100%** of any daily limit, of the stored data and of the daily e-mail quota.

1. **Add payment / upgrade plan** opens the Firebase console: **Modify plan → Blaze**, add the card and set a budget alert. The free amounts stay included; only use above them is charged.
2. **View usage** opens Firebase's own usage page.

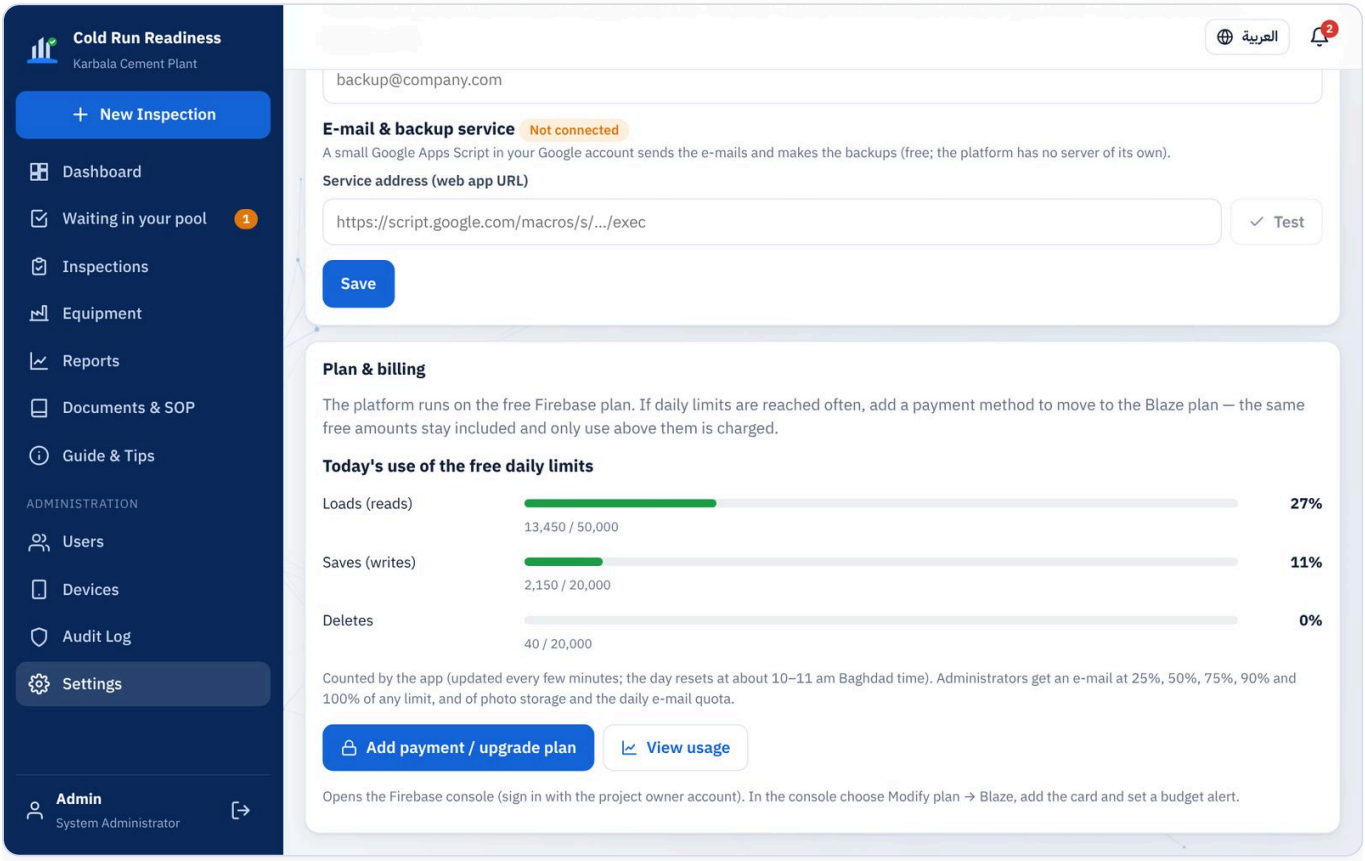

Settings → Plan & billing with today's use

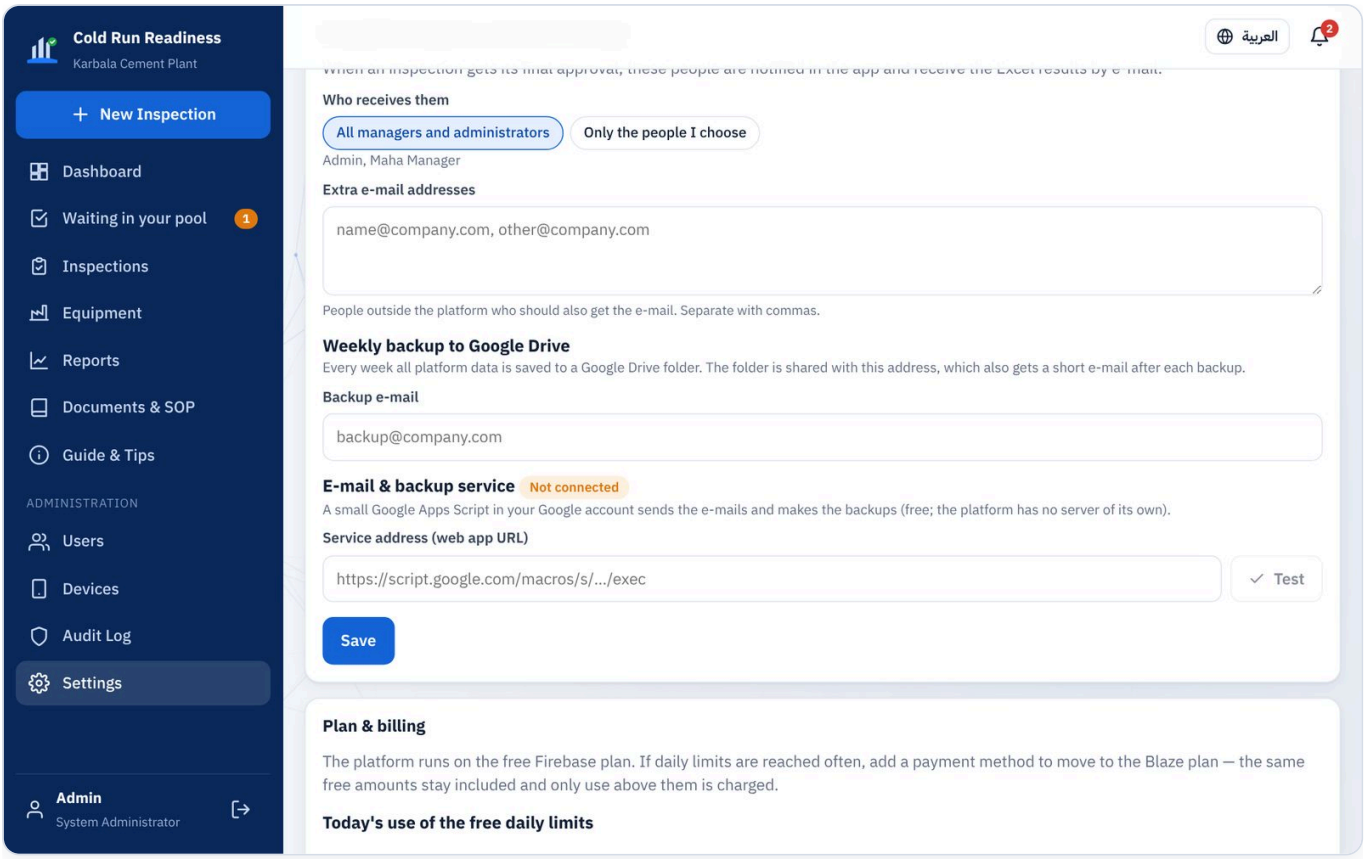


Reports, e-mail and backup settings

One-time setup of the e-mail & backup service

1. Open **script.google.com** → **New project**.
2. Paste **Code.gs** from **platform/email-backup-service**. In Project settings tick "Show appsscript.json" and replace it with the file of the same name.
3. Set **WEB_API_KEY** at the top of Code.gs (the web API key of the Firebase app). Choose **setup** → **Run** and allow the permissions — this schedules the weekly backup (Fridays 02:00) and the usage check (every 30 minutes).
4. **Deploy** → **New deployment** → **Web app**, Execute as **Me**, access **Anyone**. Copy the /exec URL into Settings and press Test.

14 Help inside the platform

Guide & Tips in the menu explains every step for your role, and offers this guide as a PDF. Short tips appear at the top of the main pages; close one with ✕.

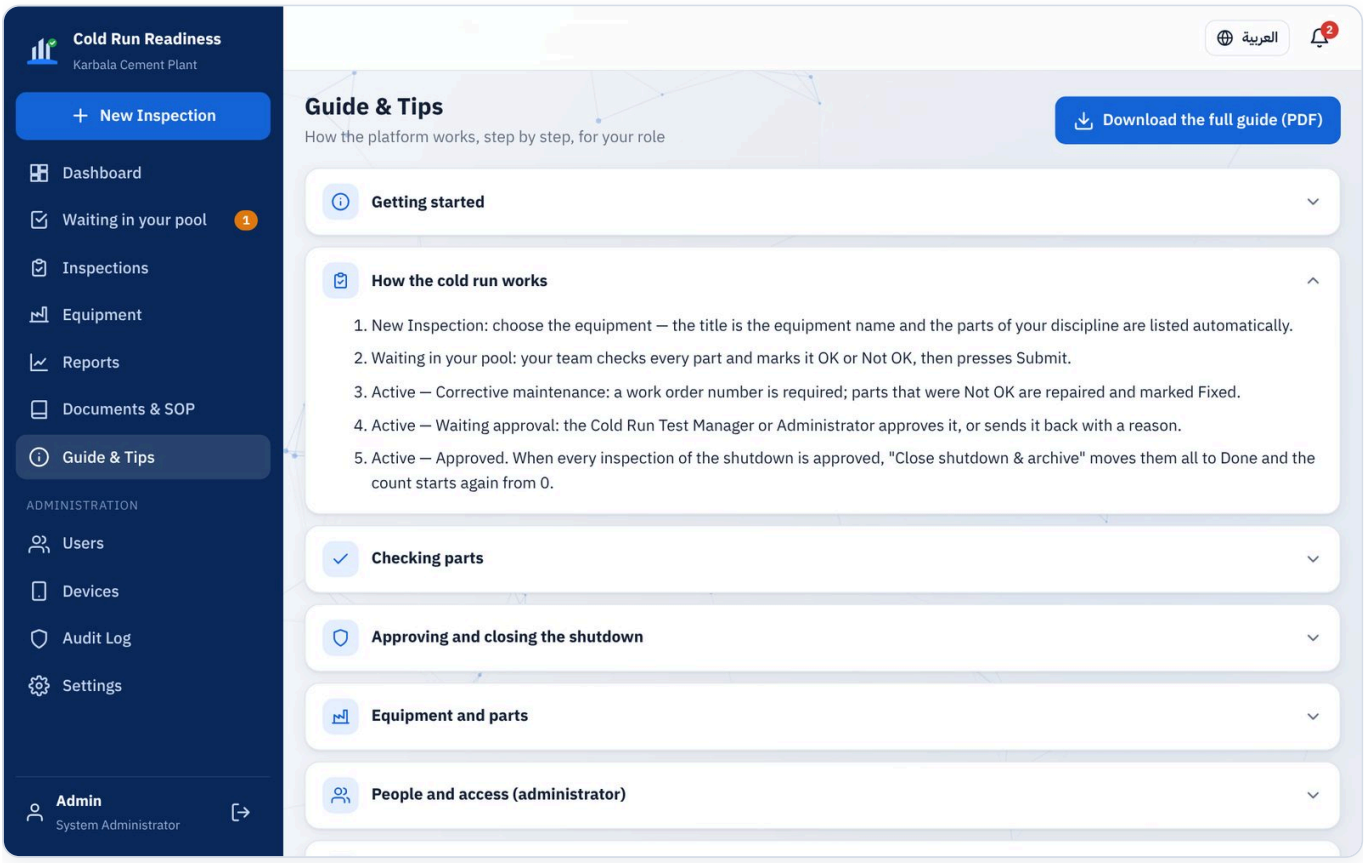

Guide & Tips

15 Good practice

1. Use your own account; on shared tablets sign out at the end of the shift.
2. Describe problems clearly and add photos — they are signed with your name and time.
3. Back online after working without signal? Wait for the sync icon to disappear before closing the app.
4. Managers: close the shutdown only when the cold run is really complete — archiving cannot be undone.
5. To stay on the free plan: delete inspections made by mistake (photos take most of the space) and act on the usage e-mails at 75% and 90%.

> **Important** Starting equipment always follows the plant's LOTO, permit and operating-authorization procedures.

16 Questions and problems

Problem	What to do
"Your account has no profile yet"	Ask the administrator to add you with the exact e-mail you use.
I cannot see any equipment to start	Your department has no equipment with parts of your discipline yet, or your role/department is not set. Ask the manager.
"This inspection already exists"	Your team started it already — it opens so you can continue.
It asks for a work order	Some parts are Not OK: enter the work order number raised for the repair. Without it the inspection cannot go to corrective maintenance.
Submit is greyed out	Some parts are still not checked; the bar at the bottom says how many.
The archive button does not appear	Not every inspection of the shutdown is approved yet.
CSV rows were skipped	The preview says why: unknown department, empty equipment name or unknown part type.
A wrong ✓ or ✕	Tap the highlighted button again to clear the part, then choose again.
I do not see Reports or Settings	Team members see only their own work; reports and settings are for managers and administrators. Your own details are under **My profile**.
The year of the new shutdown is wrong	The administrator presses **Edit** on the shutdown card and sets the name and year.
A usage alert e-mail arrived	Check Settings → Plan & billing. At 90–100% either wait for the daily reset or add a payment method.
No password e-mail	Check spam, use "Forgot password?", or ask the administrator to resend it.

العربية


جاهزية التشغيل البارد

دليل المستخدم ومدير النظام — من الألف إلى الياء

معمل سمنت كربلاء · التوقف السنوي

https://kcp-coldrun-2026.web.app

الإصدار 2026-10-24

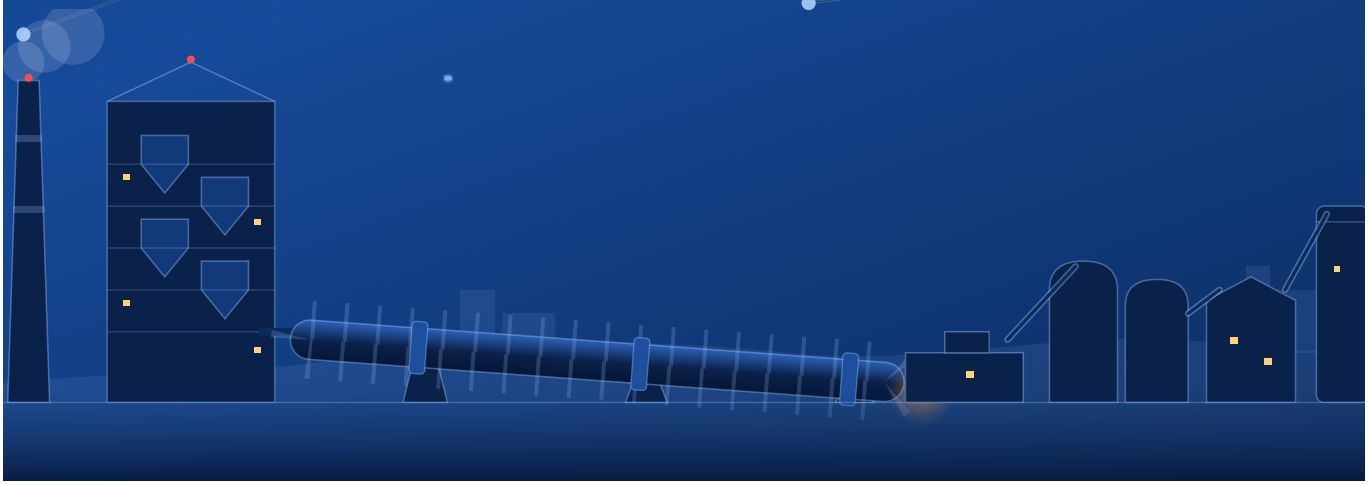

المحتويات

1 نبذة عن المنصة

2 الدخول إلى المنصة

3 الأدوار

4 مسار العمل

5 بانتظار فريقك وبدء الفحص

6 فحص الأجزاء

7 الصيانة التصحيحية

8 الاعتماد

9 إغلاق التوقف والأرشفة

10 المعدات والأجزاء (CSV)

11 التقارير وملفات Excel

12 الأشخاص والصلاحيات

13 الإعدادات وبريد التقارير والنسخ الاحتياطي

14 المساعدة داخل المنصة

15 الممارسات الجيدة

16 أسئلة ومشكلات

1 نبذة عن المنصة

تنظّم منصة جاهزية التشغيل البارد اختبارات التشغيل البارد في التوقف السنوي. لكل معدة أجزاء ميكانيكية وكهربائية وسيطرة وإنتاج. يفحص كل فريق أجزاء اختصاصه، وتمر الأجزاء غير السليمة بالصيانة التصحيحية، ثم يعتمد مدير اختبار التشغيل البارد النتيجة.


الأقسام العشرة هي **طاحونة المواد الأولية 1 و2** و**الفرن 1 و2** و**المبرّد 1 و2** و**طاحونة السمنت من 1 إلى 4** (يستطيع مدير النظام تغيير أسمائها أو إضافة أقسام أو إيقافها). تعمل المنصة بالعربية والإنجليزية، على الهواتف والأجهزة اللوحية والحواسيب، وتستمر بالعمل دون اتصال بالشبكة.

مهم الاعتماد يوثّق الجاهزية فقط. لا يخوّل التشغيل، ولا يتجاوز أنظمة الحماية (Interlocks)، ولا يحل محل العزل والإقفال (LOTO) أو تصاريح العمل أو تخويل التشغيل الرسمي في المعمل.

2 الدخول إلى المنصة

لمن الجميع

افتح **https://kcp-coldrun-2026.web.app** في متصفح Chrome أو Edge أو Safari. يضيفك مدير النظام أولاً، ثم يصلك بريد لتعيين كلمة المرور.

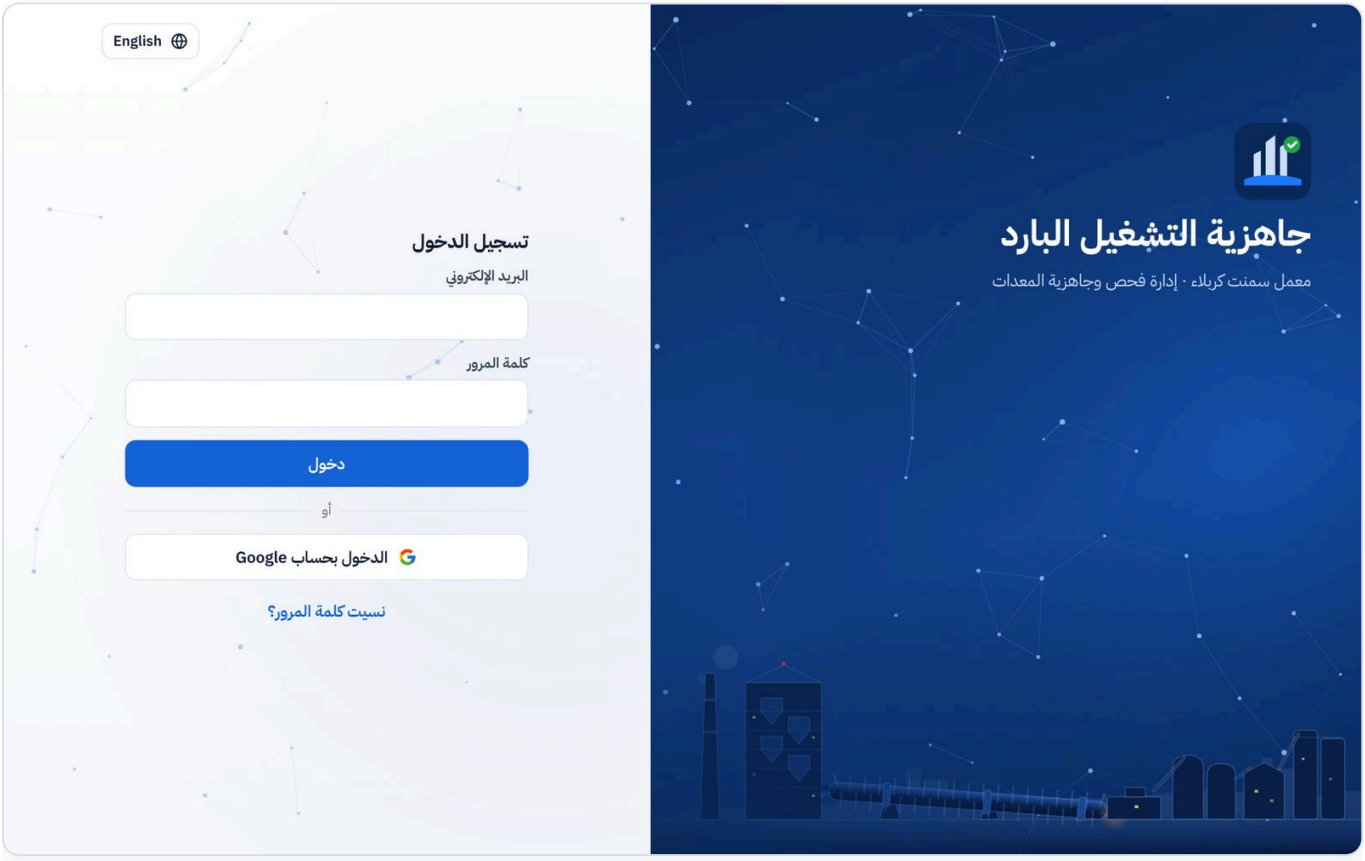


صفحة الدخول

1. **بكلمة مرور:** افتح بريد "إعادة تعيين كلمة المرور"، واختر كلمة مرور لا تقل عن 8 أحرف، ثم ادخل ببريدك وكلمة المرور.
2. **بحساب Google:** اضغط **الدخول بحساب Google** واختر البريد نفسه الذي أضافه المدير.
3. **نسيت كلمة المرور؟** اكتب بريدك في صفحة الدخول واضغط **نسيت كلمة المرور؟**.
4. بدّل اللغة في أي وقت بزر **العربية / English** في الأعلى.

تثبيت التطبيق

1. **أندرويد / الحاسوب:** اضغط **تثبيت** في النافذة التي تظهر عند فتح الموقع.
2. **آيفون / آيباد:** اضغط زر المشاركة في Safari ثم **إضافة إلى الشاشة الرئيسية**.

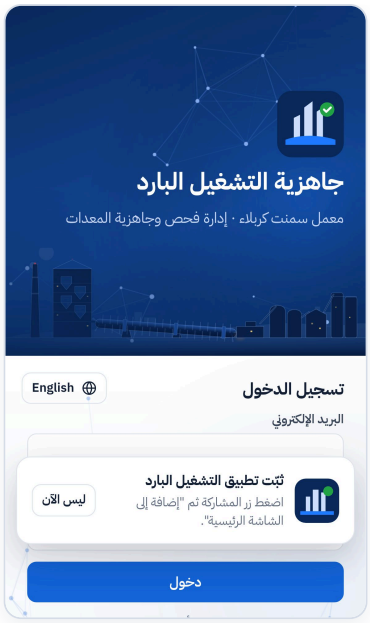


نافذة التثبيت على الآيفون


نصيحة لا توجد تغطية في الموقع؟ تابع العمل. تُحفظ تغييراتك على الجهاز وتُرسل تلقائياً عند عودة الاتصال.

3 الأدوار

الدور	ما يقوم به
مدير النظام	كل الصلاحيات: المستخدمون والأجهزة والأقسام والإعدادات والمعدات والاعتماد والأرشفة؛ وإعادة تسمية التوقفات وتصحيح سنتها؛ وحذف الفحوصات المنشأة بالخطأ؛ والخطة والاستخدام والدفع.
مدير اختبار التشغيل البارد	يرى جميع الفرق. يعتمد الفحوصات أو يعيدها، ويغلق التوقف ويؤرشف، ويدير المعدات، ويطّلع على التقارير وسجل التدقيق، ويستلم تقارير الإنجاز.
عضو الفريق	له اختصاص (ميكانيك أو كهرباء أو سيطرة أو إنتاج) وقسم. يرى ويبدأ ويفحص فحوصات اختصاصه في قسمه فقط، وينفذ الصيانة التصحيحية. لا تقارير ولا إعدادات ولا إدارة — تظهر في القائمة **ملفي الشخصي** بدلاً من الإعدادات.

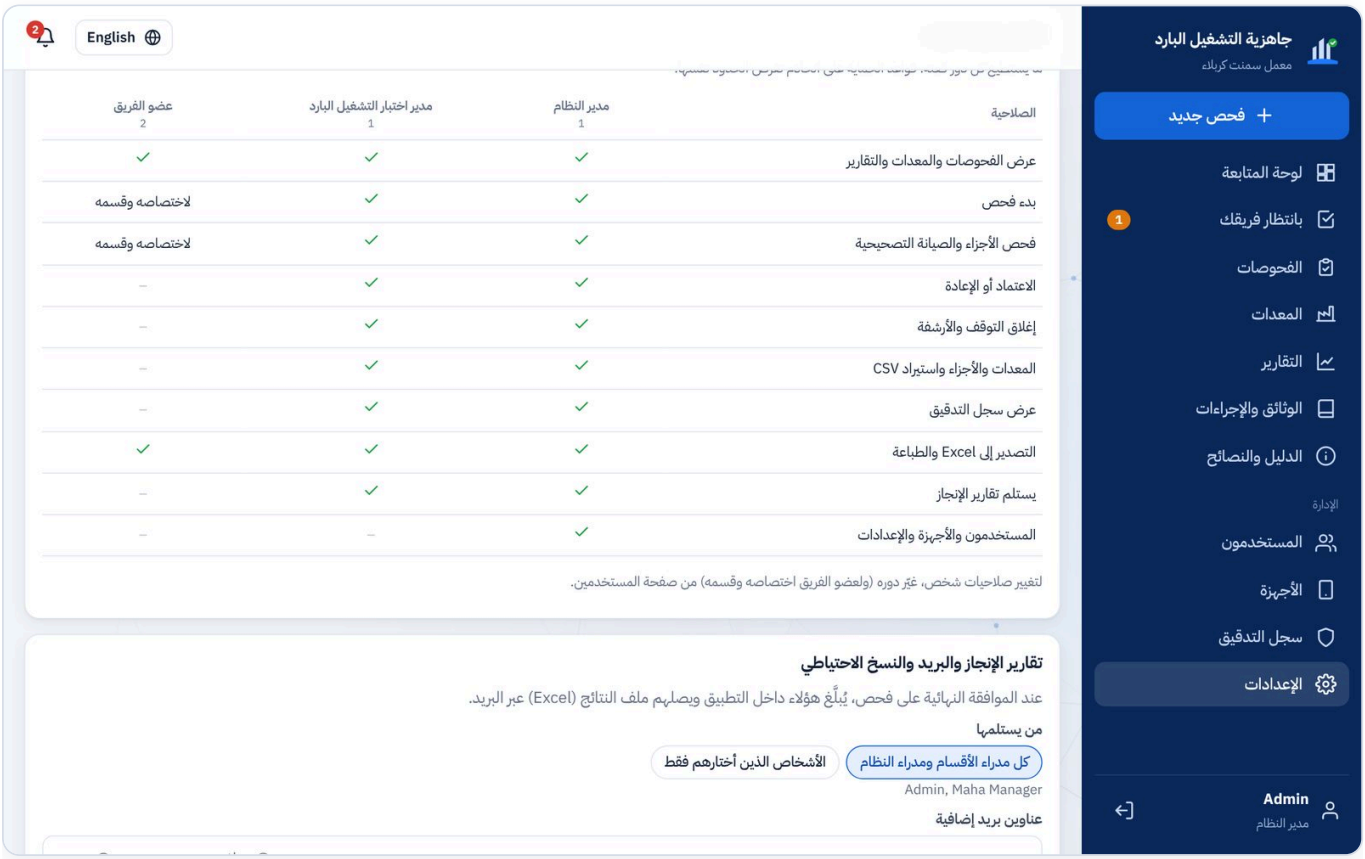

الإعدادات ← الأدوار والصلاحيات

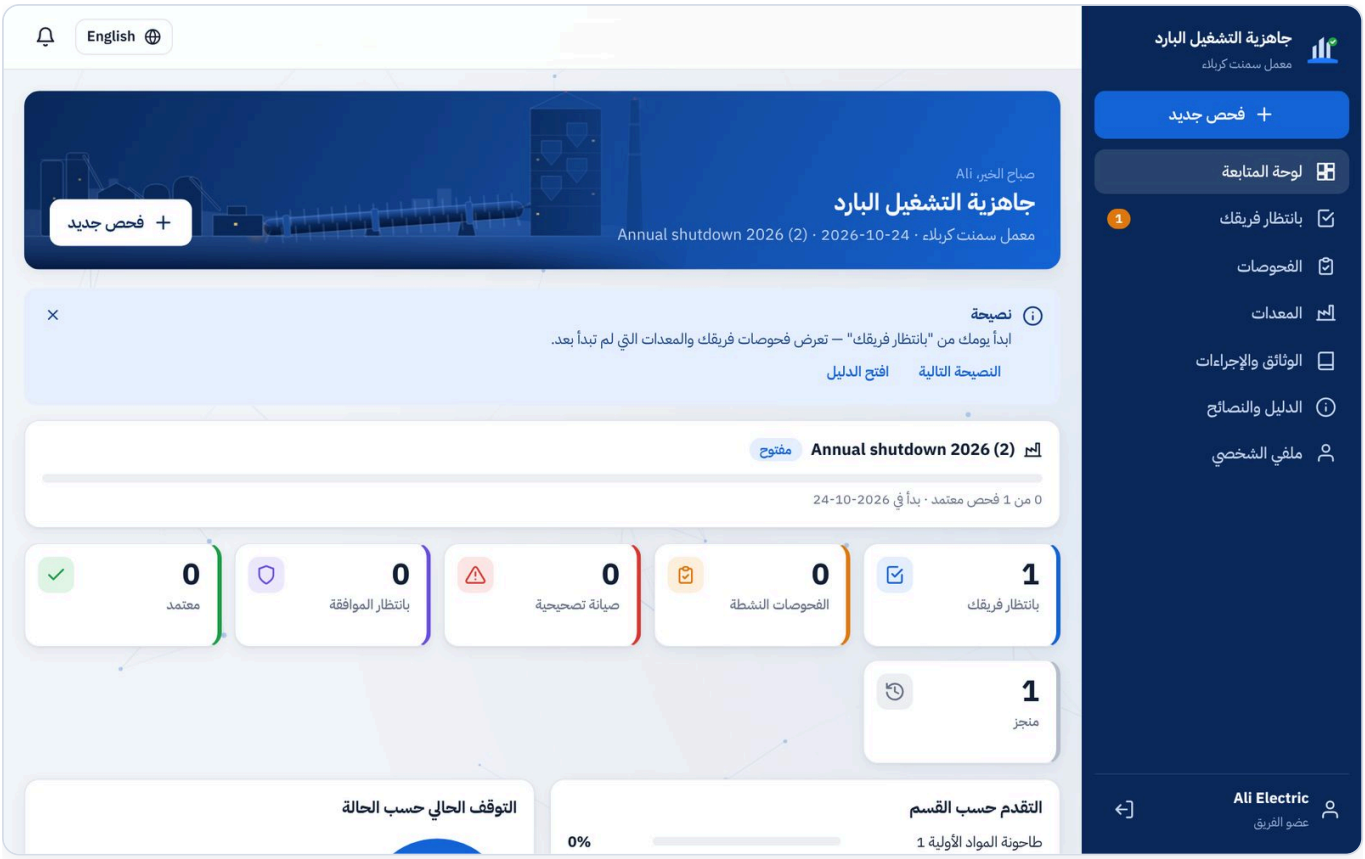


ما يراه عضو الفريق: عمله فقط، وملفي الشخصي بدلاً من الإعدادات

تفرض قواعد الحماية على الخادم الحدود نفسها، فلا يمكن تجاوزها من أي جهاز. فمثلاً مهندس الكهرباء في الفرن 1 يرى ويعمل على الفحوصات الكهربائية للفرن 1 فقط؛ أما العضو الذي ليس له قسم فيعمل على اختصاصه في جميع الأقسام.

4 مسار العمل

يغطي كل فحص معدة واحدة واختصاصاً واحداً. ولكل معدة واختصاص فحص واحد في كل توقف.

المرحلة	ما يحدث
فحص جديد	يبدؤه عضو الفريق (أو المدير) لمعدة. العنوان هو اسم المعدة.
بانتظار الفريق	يفحص الفريق كل جزء: سليم أو غير سليم. ثم يضغط إرسال.
نشط · صيانة تصحيحية	جزء واحد على الأقل غير سليم. رقم أمر العمل إلزامي؛ ويصلح الفريق الجزء ويؤشر "تم الإصلاح".
نشط · بانتظار الموافقة	كل شيء سليم أو تم إصلاحه. يراجعه مدير اختبار التشغيل البارد.
نشط · معتمد	معتمد. تُبلَّغ الإدارة ويصلها ملف النتائج (Excel).
منجز	عند اعتماد جميع الفحوصات يغلق المدير التوقف: ينتقل كل شيء إلى المنجز ويعود عدد الفحوصات النشطة إلى الصفر. ويحتفظ التوقف التالي بالسنة نفسها حتى يغيّرها مدير النظام.

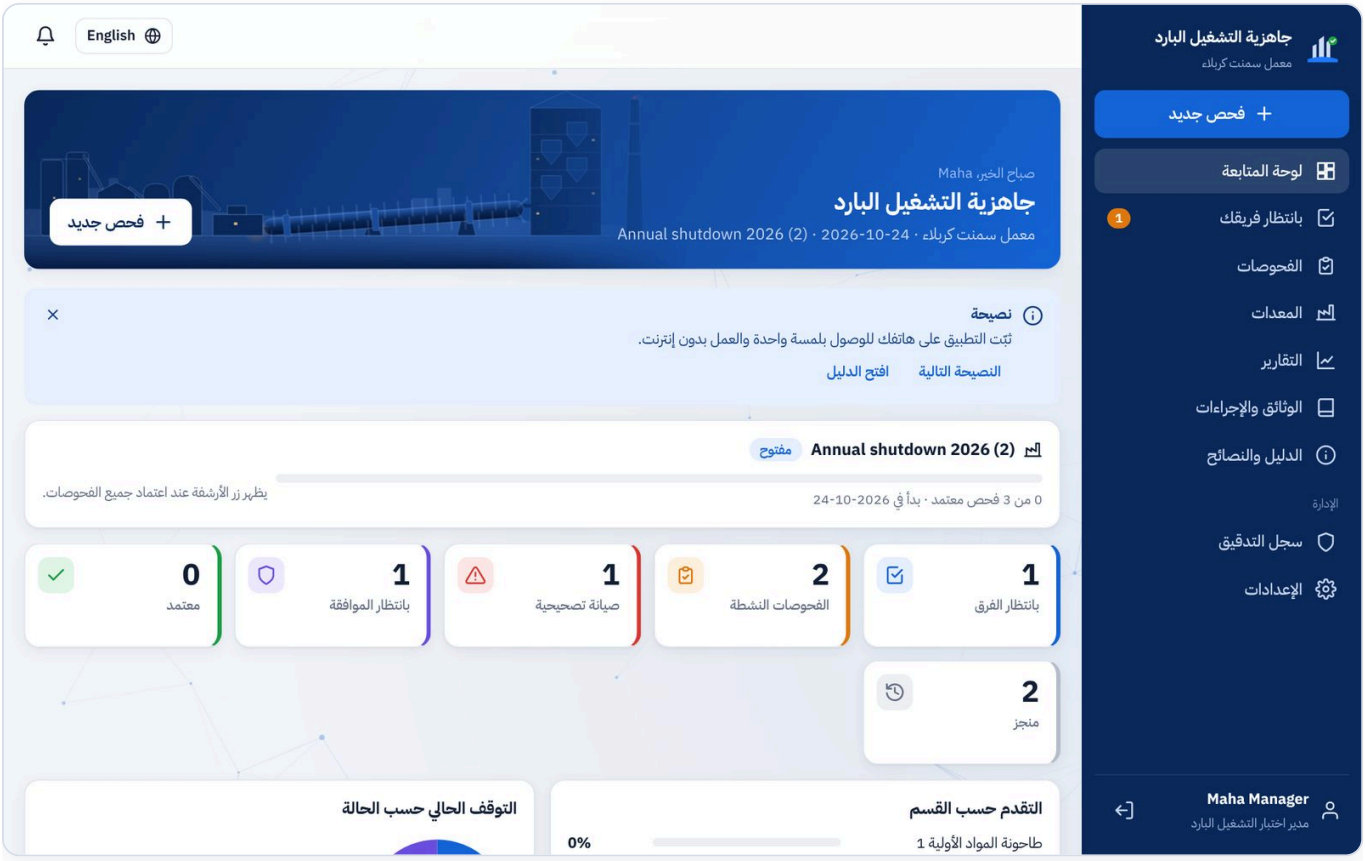

لوحة المتابعة: شريط المعمل، والتوقف، وما ينتظر فريقك، والفحوصات النشطة، والمنجز

5 بانتظار فريقك وبدء الفحص


لمن أعضاء الفريق

تعرض **بانتظار فريقك** كل ما يخص فريقك (الاختصاص + القسم): فحوصات للفحص، وأجزاء غير سليمة للإصلاح، والمعدات التي لم يبدأها أحد بعد.



بانتظار فريقك، مع المعدات التي لم تبدأ بعد

1. اضغط **ابدأ** بجانب المعدة — أو استخدم **فحص جديد** واختر المعدة.
2. يُملأ قسمك واختصاصك تلقائياً؛ ويكون العنوان اسم المعدة وتُدرج أجزاء اختصاصك.
3. اضغط **إنشاء الفحص**. إذا كان فريقك قد بدأه، يُفتح الفحص الموجود بدلاً من ذلك.

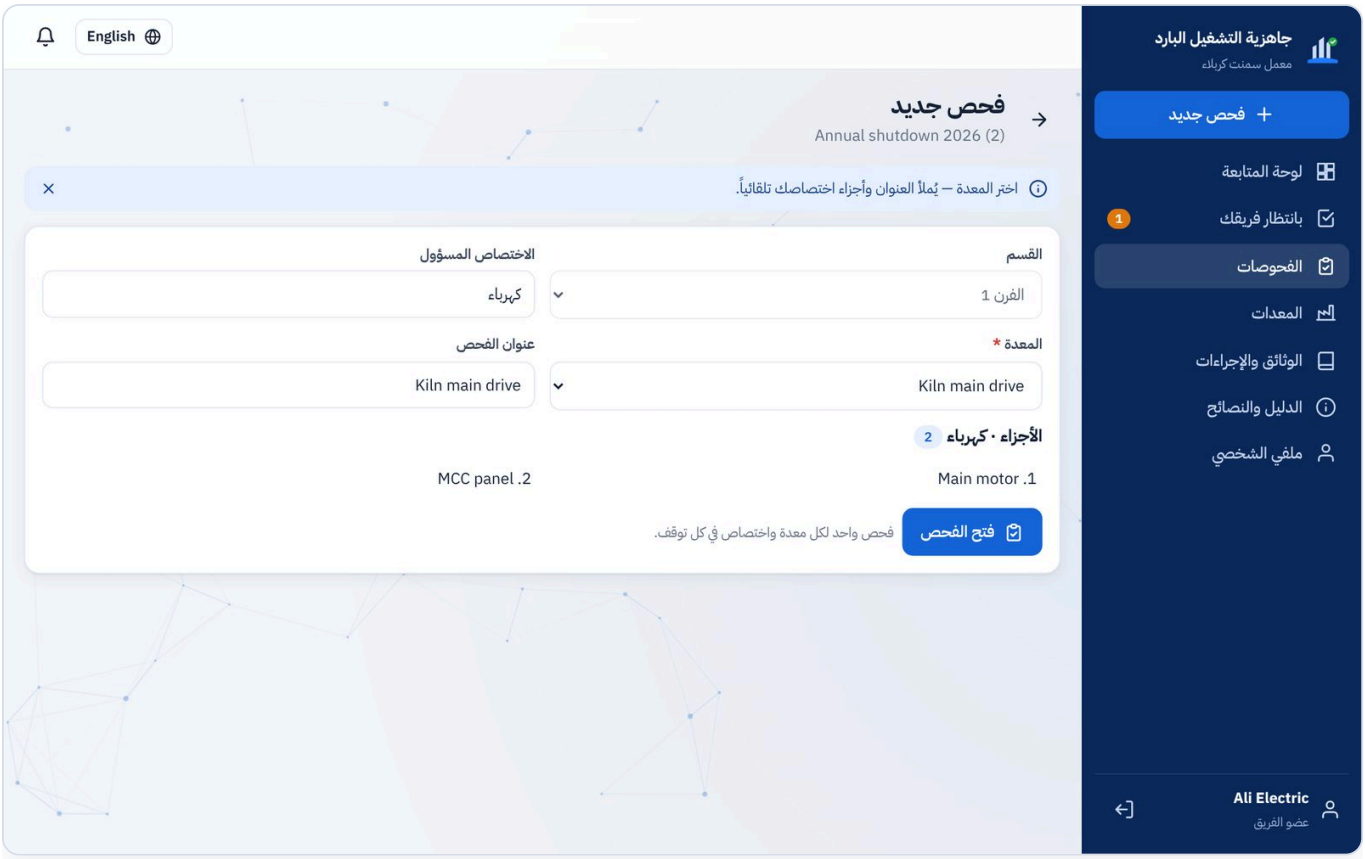

English
جاهزية التشغيل البارد
معمل سمنت كربلاء
فحص جديد
لوحة المتابعة
بانتظار فريقك
1
الفحوصات
المعدات
الوثائق والإجراءات
الدليل والنصائح
ملفي الشخصي
Ali Electric
عضو الفريق
فحص جديد
Annual shutdown 2026 (2)
اختر المعدة — يُملأ العنوان وأجزاء اختصاصك تلقائياً.
القسم
الفرن 1
الاختصاص المسؤول
كهرباء
المعدة *
Kiln main drive
عنوان الفحص
Kiln main drive
الأجزاء · كهرباء 2
1. Main motor
2. MCC panel
فتح الفحص
فحص واحد لكل معدة واختصاص في كل توقف.

فحص جديد


6 فحص الأجزاء

لمن أعضاء الفريق

1. لكل جزء اضغط ✔ (سليم) أو ✖ (غير سليم).
2. غير سليم يطلب وصفاً قصيراً للمشكلة. أضف صورة بزر الكاميرا ثم **حفظ كغير سليم**.
3. اخترت خطأً؟ اضغط ✔ المؤشَّر مرة أخرى لإلغائه. أما الضغط على ✖ المؤشَّر فيطلب التأكيد لأنه يحذف الملاحظة والصورة؛ استخدم **تعديل** لتغيير الملاحظة فقط.
4. يمكن لزملاء الفريق العمل على الفحص نفسه؛ ويُحفظ كل شيء أولاً بأول.
5. عند فحص جميع الأجزاء اضغط **إرسال الفحص**. إذا وُجد جزء غير سليم تطلب المنصة رقم **أمر العمل** الصادر من نظام الصيانة (إلزامي)، ثم ينتقل الفحص إلى **صيانة تصحيحية**؛ وإلا إلى **بانتظار الموافقة**.

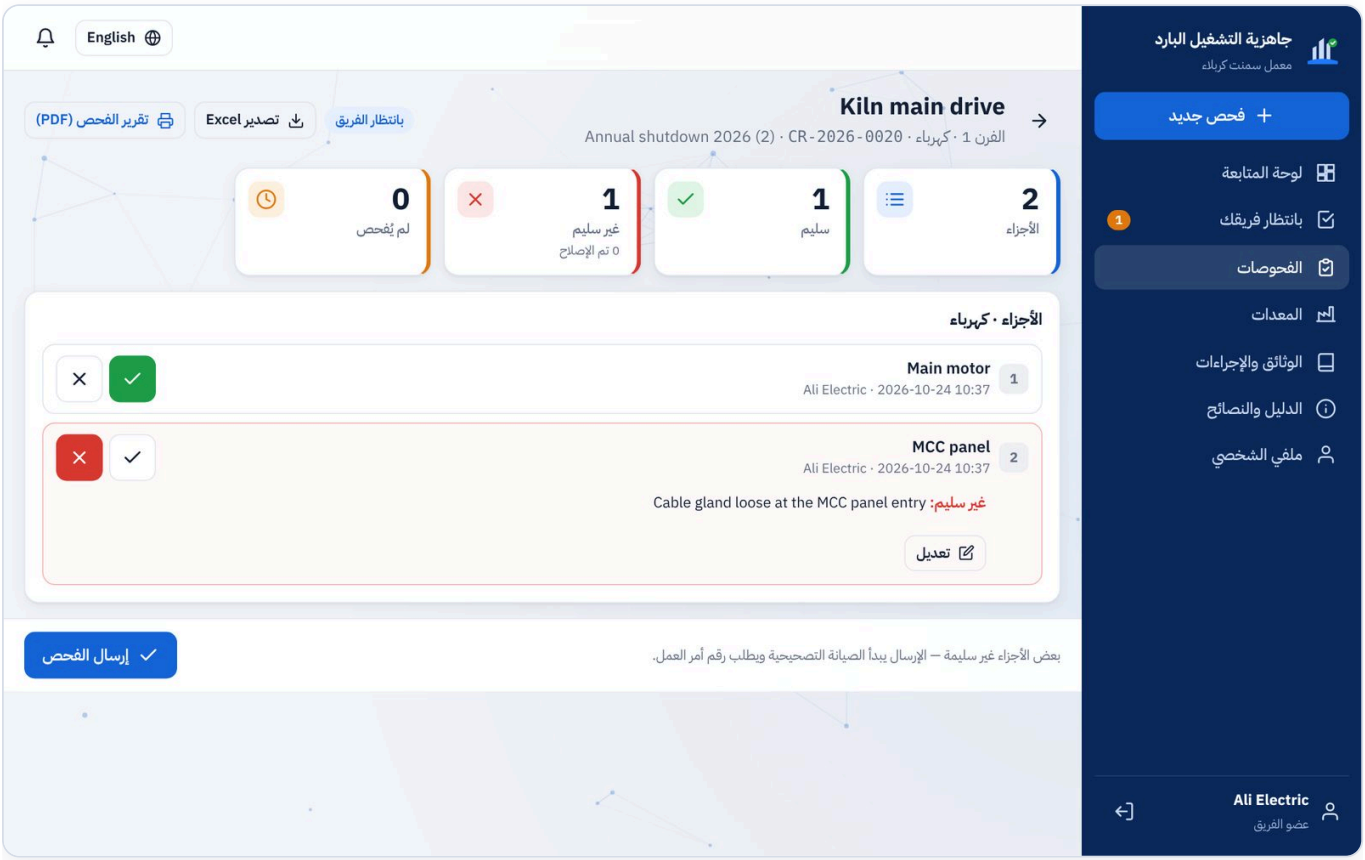

أجزاء مفحوصة: جزء سليم وآخر غير سليم مع الوصف والصورة

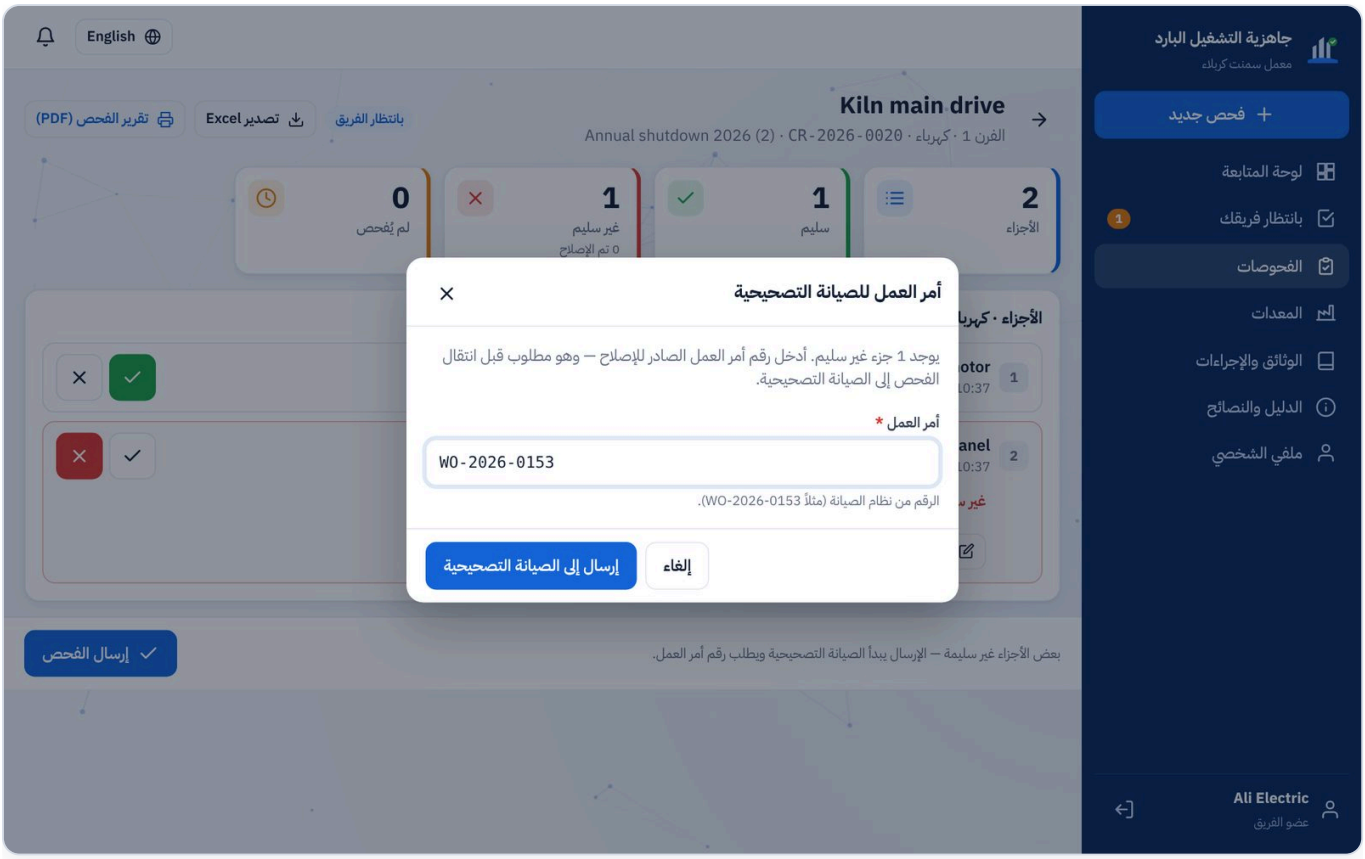


الإرسال مع جزء غير سليم: رقم أمر العمل إلزامي

نصيحة أضف صورة لكل جزء غير سليم — توفر الوقت على الإصلاح والاعتماد.

7 الصيانة التصحيحية

لمن أعضاء الفريق

1. يظهر الفحص في **بانتظار فريقك** تحت **صيانة تصحيحية**، ورقم **أمر العمل** في أعلاه. رقم خاطئ؟ اضغط **تعديل** بجانبه (ممكن حتى يخرج الفحص من الصيانة التصحيحية).
2. بعد الإصلاح افتح الجزء غير السليم واضغط **تم الإصلاح**. اكتب ما تم وأضف صورة "بعد".
3. عند إصلاح آخر جزء غير سليم ينتقل الفحص تلقائياً إلى **بانتظار الموافقة**.

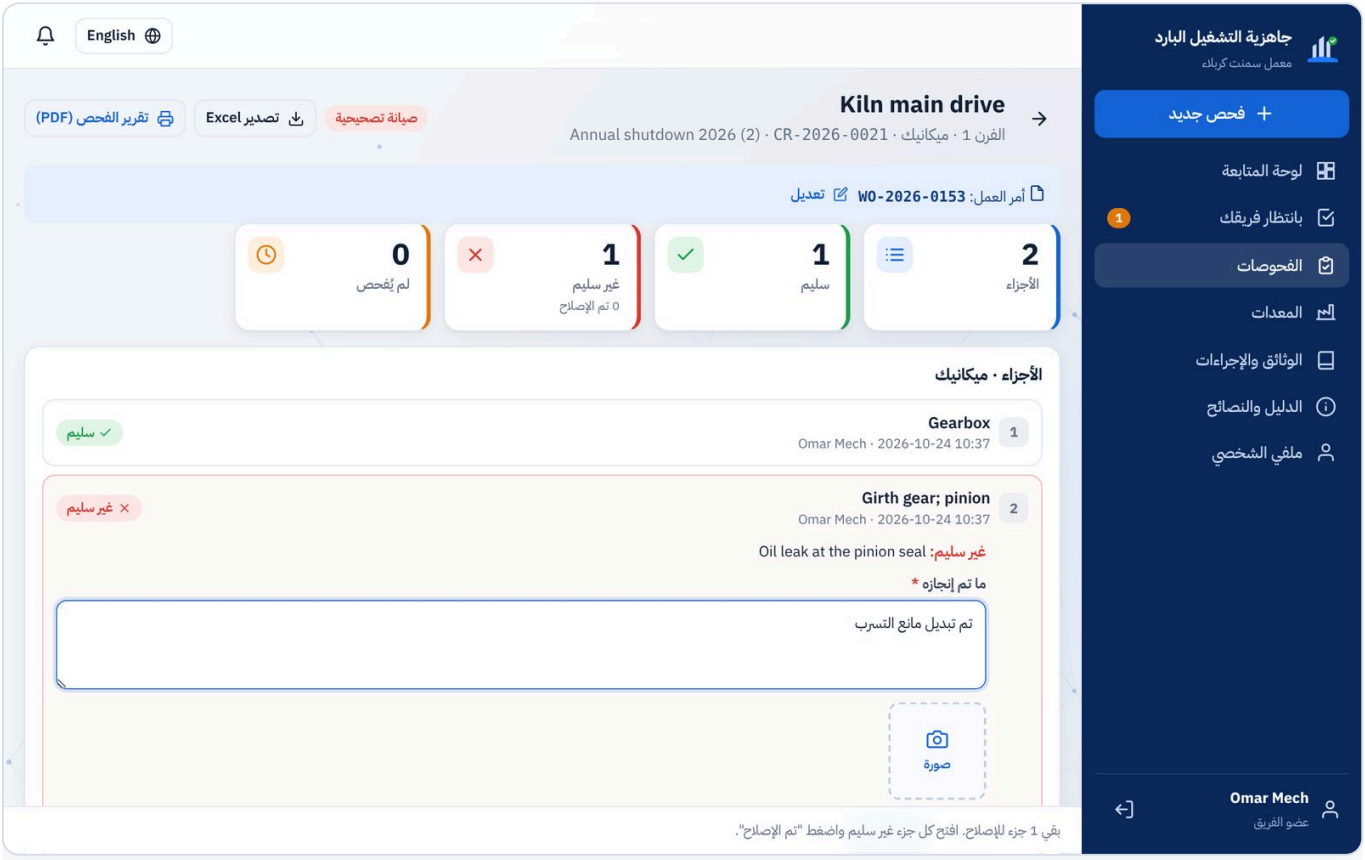


الصيانة التصحيحية: المشكلة وزر تم الإصلاح

8 الاعتماد

لمن مدير اختبار التشغيل البارد ومدير النظام

1. **بانتظار فريقك** (أو الفحوصات ← نشط ← بانتظار الموافقة) تعرض ما ينتظرك.
2. افتح الفحص وراجع الأجزاء والمشكلات والإصلاحات والصور.
3. اضغط **اعتماد** (ملاحظة اختيارية)، أو **إعادة للفريق** مع ذكر السبب — فيعود إلى الفريق ويرون سببك.
4. عند الاعتماد يُبلَّغ مستلمو التقارير داخل التطبيق، ويصلهم ملف النتائج (Excel) عند ربط خدمة البريد.

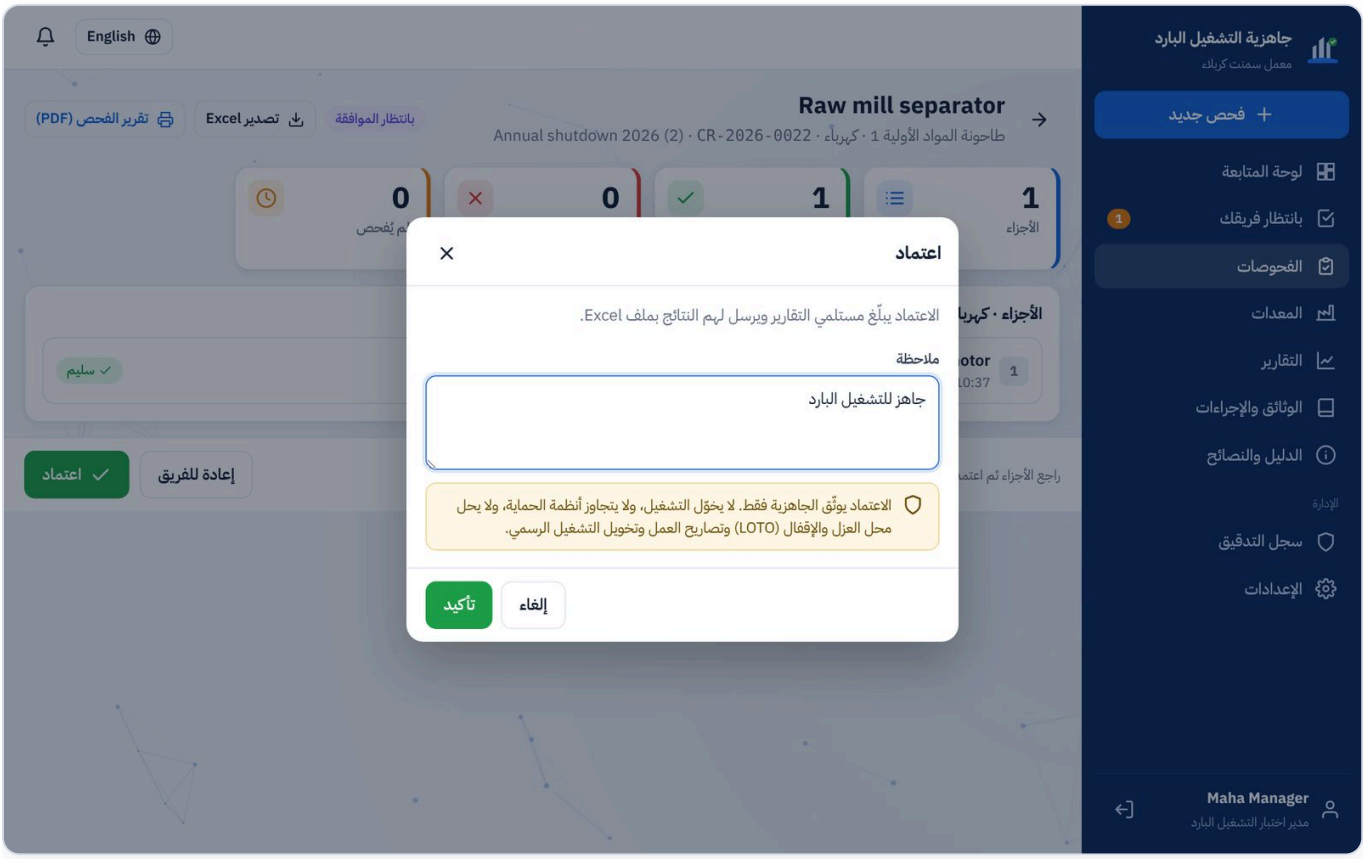

اعتماد فحص


9 إغلاق التوقف والأرشفة

لمن مدير اختبار التشغيل البارد ومدير النظام


تعرض بطاقة التوقف في لوحة المتابعة والفحوصات عدد الفحوصات المعتمدة. عندما تُعتمد **جميع** فحوصات التوقف يظهر زر **إغلاق التوقف والأرشفة**.

1. اضغط **إغلاق التوقف والأرشفة** وأكّد.
2. تنتقل جميع الفحوصات المعتمدة إلى **المنجز**، ويعود عدد الفحوصات النشطة إلى **الصفر**، ويبدأ التوقف التالي **بالسنة نفسها** — ويحدد مدير النظام السنة الجديدة والاسم يدوياً (**تعديل** في بطاقة التوقف).
3. تبقى الفحوصات المنجزة متاحة: الفحوصات ← منجز، صفِّ حسب التوقف، وصدّر إلى Excel.

نصيحة يستطيع مدير النظام إعادة تسمية توقف أو مشروع أو تصحيح سنته: **تعديل** في بطاقة التوقف، أو **الإعدادات ← التوقفات والمشاريع** للسابقة منها. يظهر الاسم الجديد على جميع فحوصاته وتقاريره وملفات التصدير.

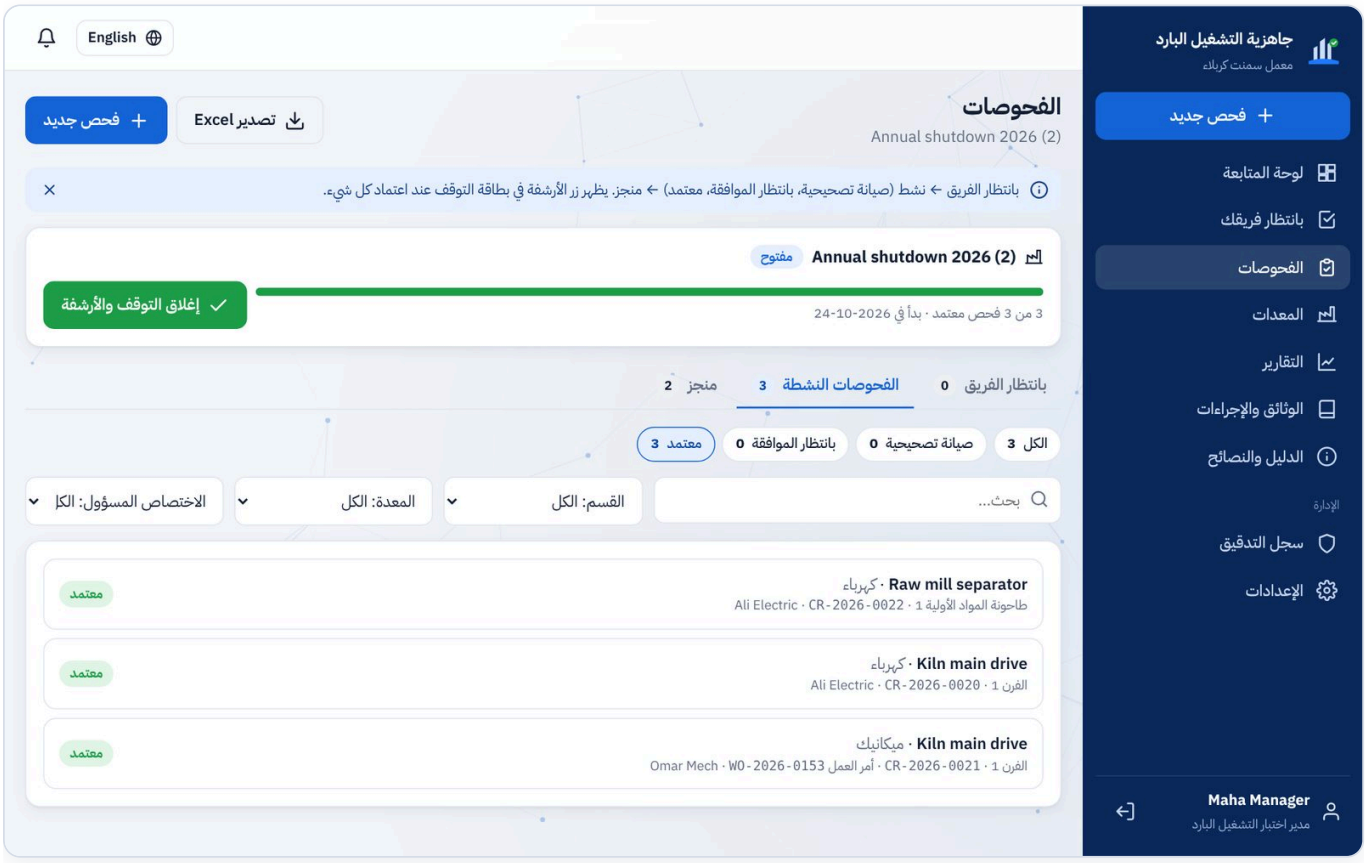

كل شيء معتمد: زر الأرشفة في بطاقة التوقف

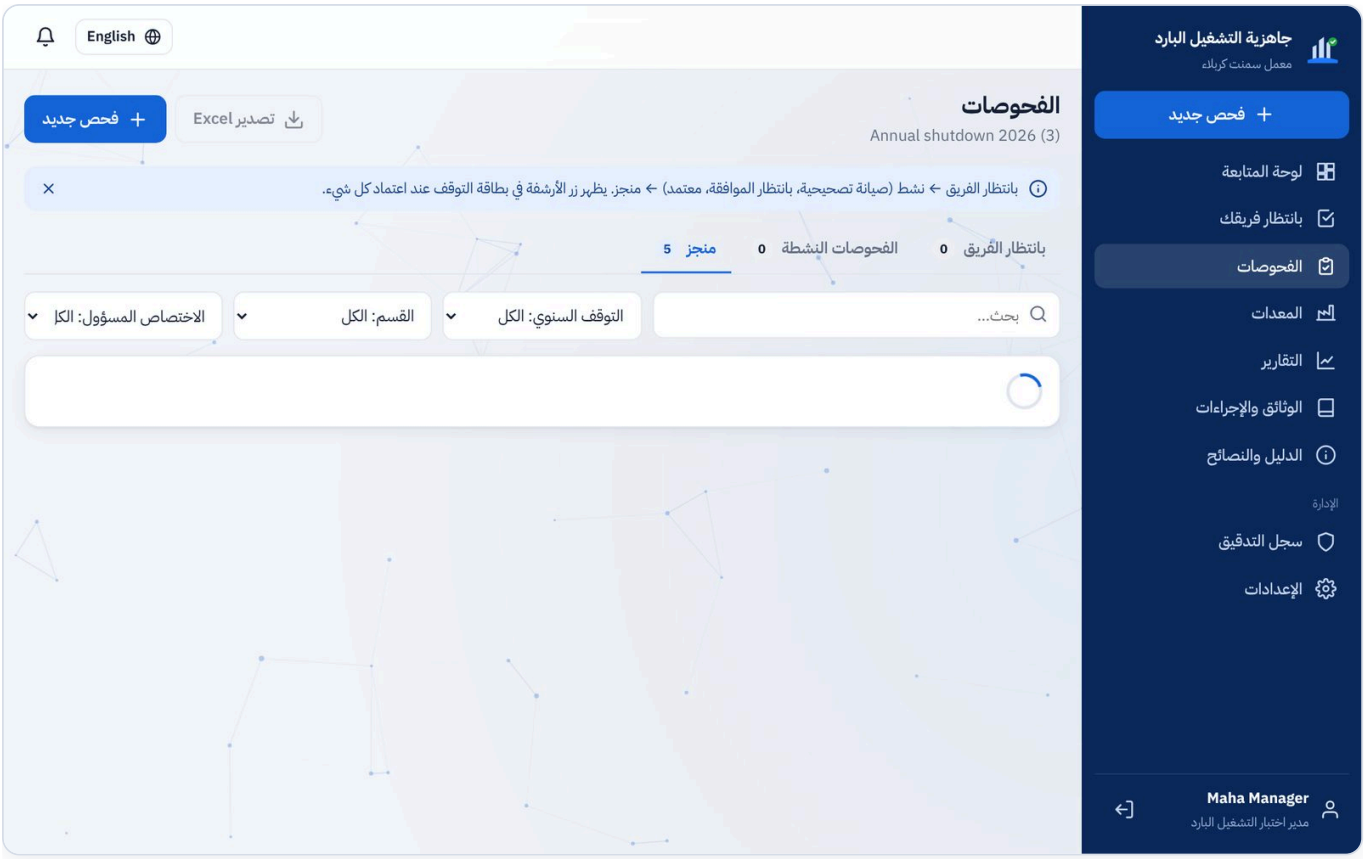


الفحوصات ← منجز

10 المعدات والأجزاء (CSV)

لمن مدير اختبار التشغيل البارد ومدير النظام

1. **المعدات ← تنزيل CSV**. تحصل على القائمة الحالية (أو مثال عند خلوها).
2. افتحه في Excel واملأ **صفاً لكل جزء**: القسم، المعدة، نوع الجزء، الجزء. نوع الجزء: Mechanical أو Electrical أو Instrumentation أو Production (والأسماء العربية تعمل أيضاً).
3. احفظه بصيغة **CSV UTF-8** واضغط **رفع CSV**.
4. راجع المعاينة — المعدات الجديدة والمحدّثة وأي صفوف فيها مشكلات — ثم اضغط **استيراد**.


القسم	المعدة	نوع الجزء	الجزء
Kiln	Kiln main drive	Electrical	Main motor
Kiln	Kiln main drive	Mechanical	Gearbox
Raw Mill	Raw mill separator	Instrumentation	Speed sensor

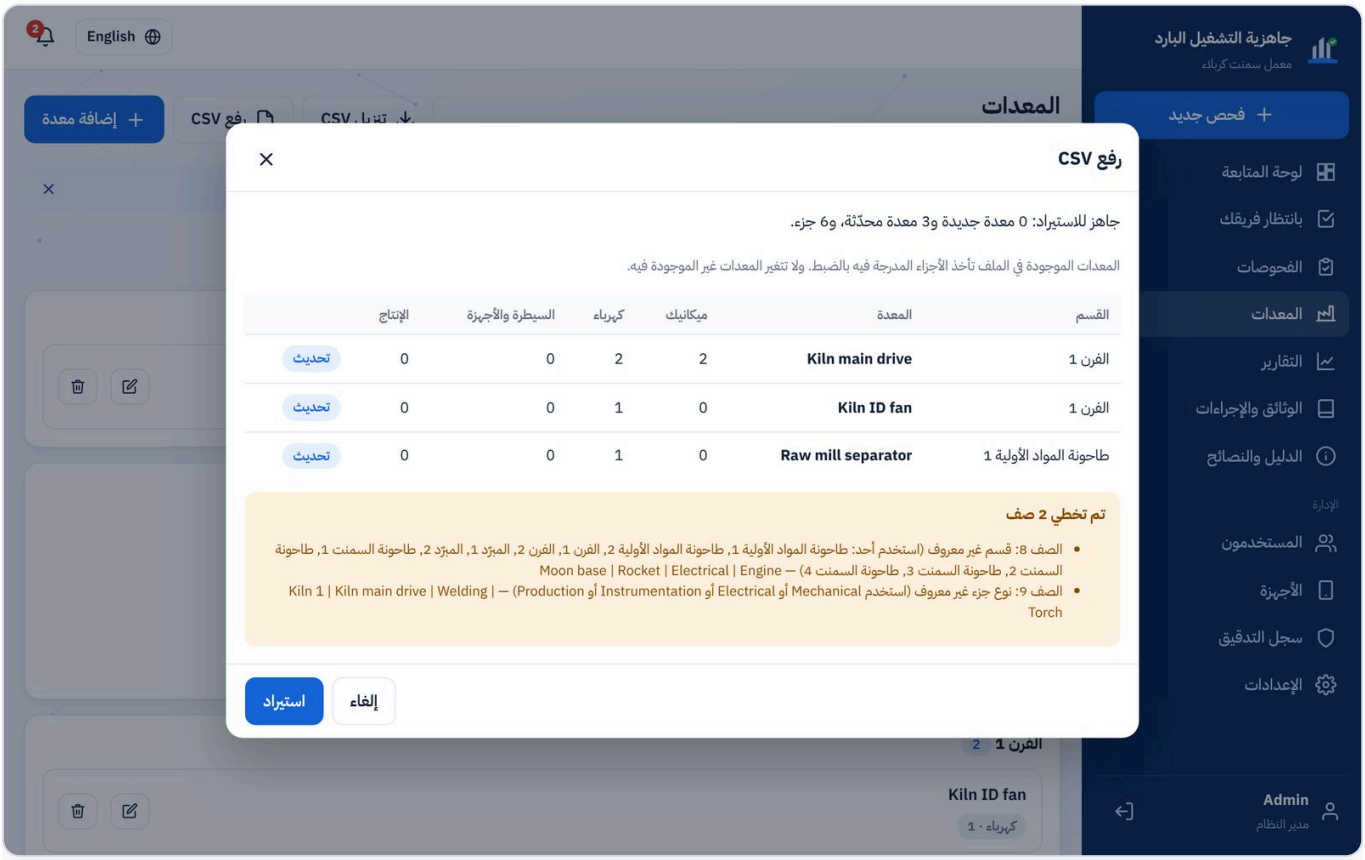

معاينة الرفع

مهم المعدات الموجودة في الملف تأخذ الأجزاء المدرجة فيه بالضبط؛ ولا تتغير المعدات غير الموجودة فيه. رفع الملف نفسه مرة أخرى يحدّث — ولا يكرر.

لتعديل واحد اضغط القلم بجانب المعدة: الاسم والقسم وجزء واحد في كل سطر لكل اختصاص.

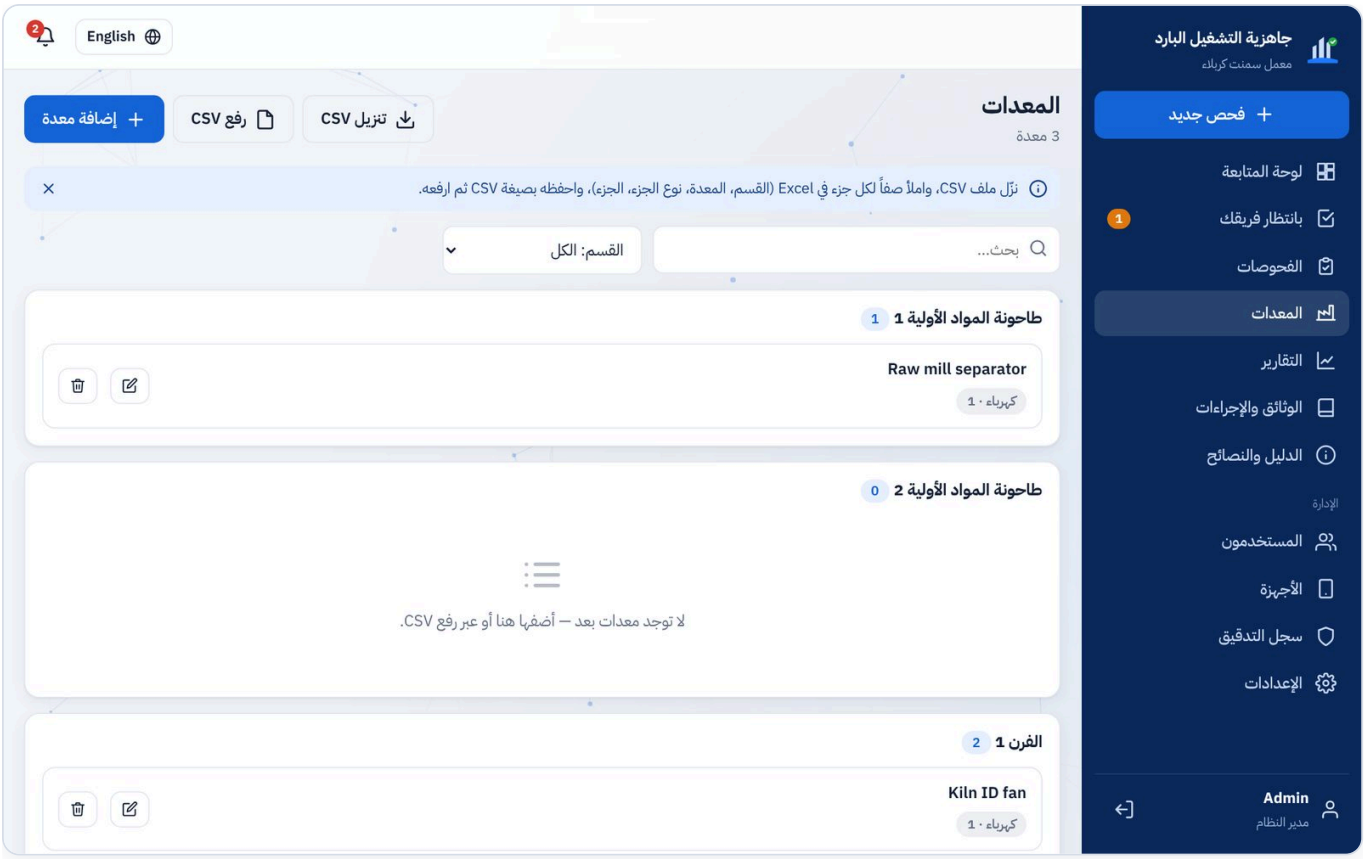


المعدات حسب القسم

11 التقارير وملفات Excel

لمن مدير اختبار التشغيل البارد ومدير النظام

1. افتح **التقارير** واختر: نظرة عامة حسب القسم، حسب الاختصاص، الأجزاء غير السليمة والصيانة التصحيحية، المعدات التي لم تبدأ، كل الفحوصات، أو العمل لكل شخص.
2. اختر التوقف وأي تصفية (القسم، المعدة، الاختصاص، الحالة).
3. اضغط **تصدير Excel**. يحتوي الملف ما تراه بالضبط مع كتابة التصفية في أعلاه.

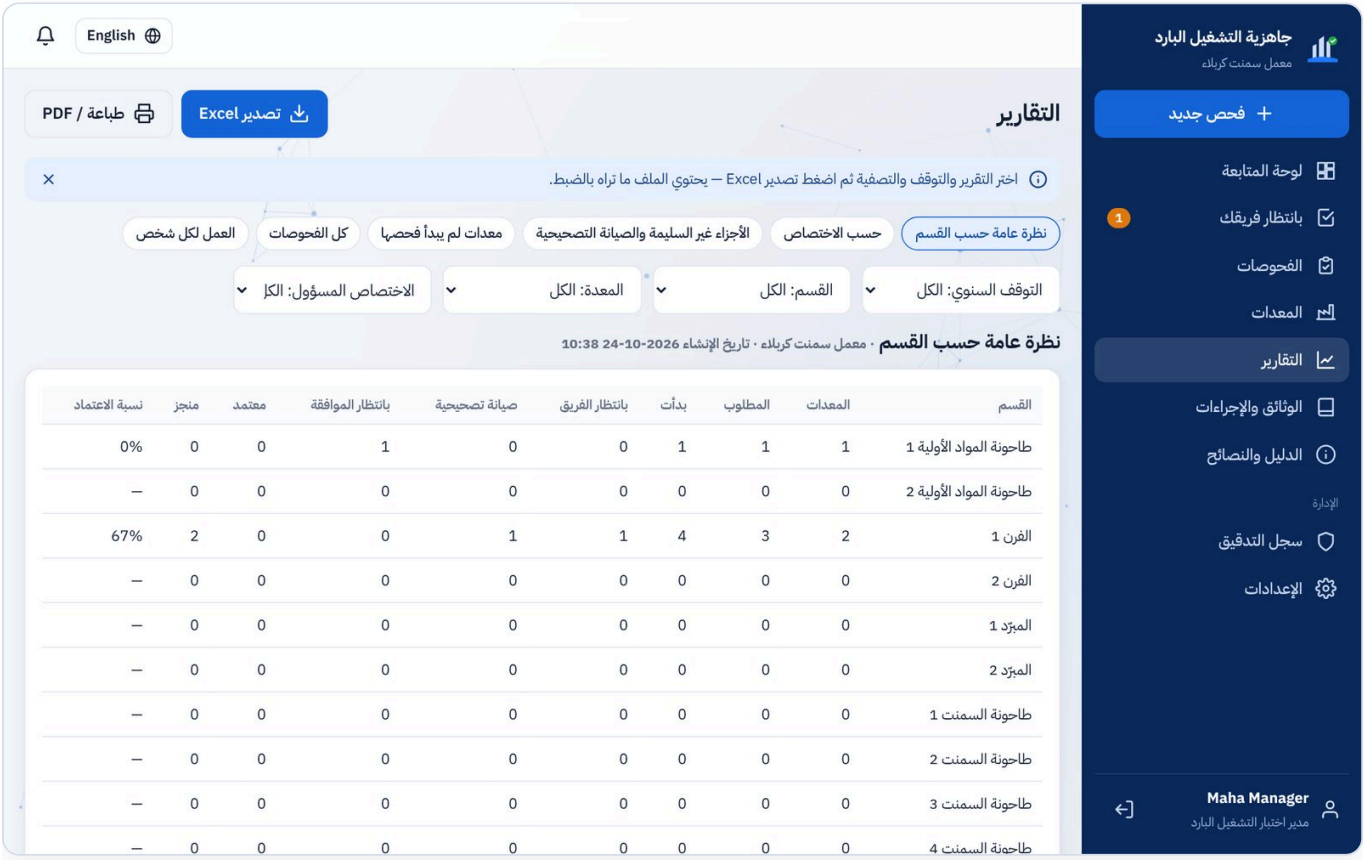


التقارير

ولكل فحص أيضاً **تصدير Excel** (الملخص والأجزاء) و**تقرير الفحص (PDF)** للطباعة والتوقيع.

12 الأشخاص والصلاحيات

لمن مدراء النظام

1. **المستخدمون** ← **إضافة مستخدم**: الاسم والبريد والدور. ولـ**عضو الفريق** اختر الاختصاص والقسم أيضاً.
2. اترك كلمة المرور فارغة: يصلهم بريد لتعيينها، أو يدخلون مباشرة بـ**الدخول بحساب Google** بالبريد نفسه.
3. غيّر الدور أو الاختصاص أو القسم بالقلم. عند مغادرة شخص اضغط **تعطيل** — يبقى سجله.
4. **الأجهزة**: ألغِ صلاحية هاتف مفقود أو مشترك فيُسجَّل خروجه فوراً.
5. **الأقسام** (الإعدادات): غيّر الاسم بالعربية والإنجليزية، ورتّبها، وأضف قسماً، أو أوقف قسماً — تختفي الأقسام الموقوفة من القوائم ومن عمل الفرق ويبقى سجلها.
6. **حذف فحص** أُنشئ بالخطأ: افتحه واضغط **حذف** (لمدير النظام فقط). تُحذف صوره أيضاً؛ ويبقى الحذف مسجلاً في سجل التدقيق ولا يمكن التراجع عنه.

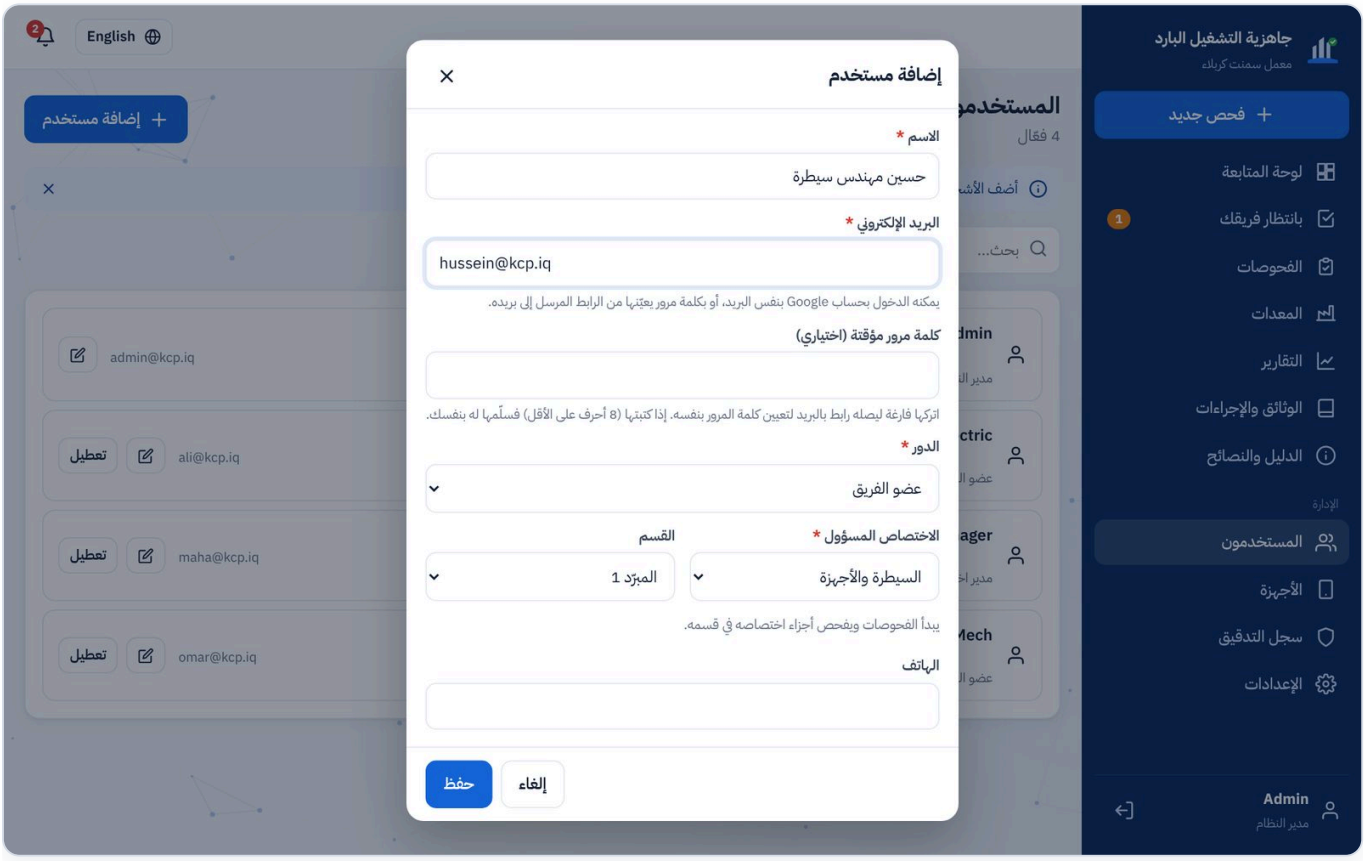

إضافة عضو فريق

13 الإعدادات وبريد التقارير والنسخ الاحتياطي


لمن مدراء النظام

1. **من يستلم التقارير:** كل المدراء ومدراء النظام (افتراضياً)، أو فقط من تحددهم، إضافة إلى عناوين بريد أخرى.
2. **بريد النسخ الاحتياطي:** يُشارك معه مجلد النسخ الأسبوعي على Google Drive.
3. **خدمة البريد والنسخ الاحتياطي:** الصق عنوان الخدمة مرة واحدة واضغط **اختبار** — يصلك بريد اختبار وتظهر قائمة المستلمين.


الخطة المجانية وتنبيهات الاستخدام والدفع

تعمل المنصة على خطة Firebase المجانية: 50,000 تحميل و20,000 حفظ و20,000 حذف يومياً (تبدأ من جديد نحو الساعة 10–11 صباحاً بتوقيت بغداد) و1 غيغابايت من البيانات. تعرض **الإعدادات ← الخطة والدفع** استخدام اليوم. ويصل لمديري النظام بريد عند **25%** و**50%** و**75%** و**90%** و**100%** من أي حد يومي ومن مساحة البيانات ومن حصة البريد اليومية.

1. **إضافة وسيلة دفع / ترقية الخطة** يفتح لوحة Firebase: **Modify plan ← Blaze**، أضف البطاقة وحدّد تنبيه ميزانية. تبقى الكميات المجانية مشمولة ويُحتسب فقط ما يزيد عليها.
2. **عرض الاستخدام** يفتح صفحة الاستخدام في Firebase.

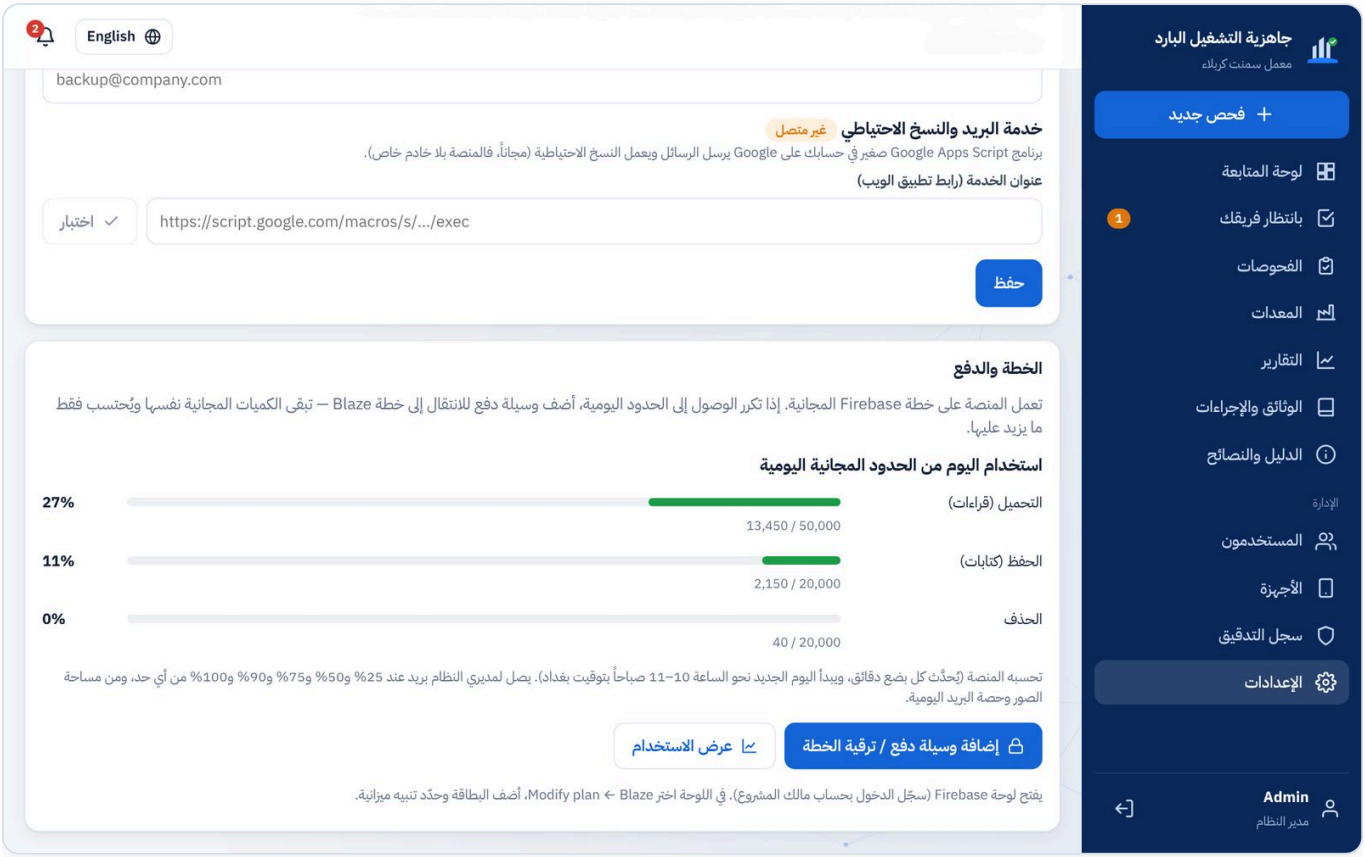

الإعدادات ← الخطة والدفع مع استخدام اليوم

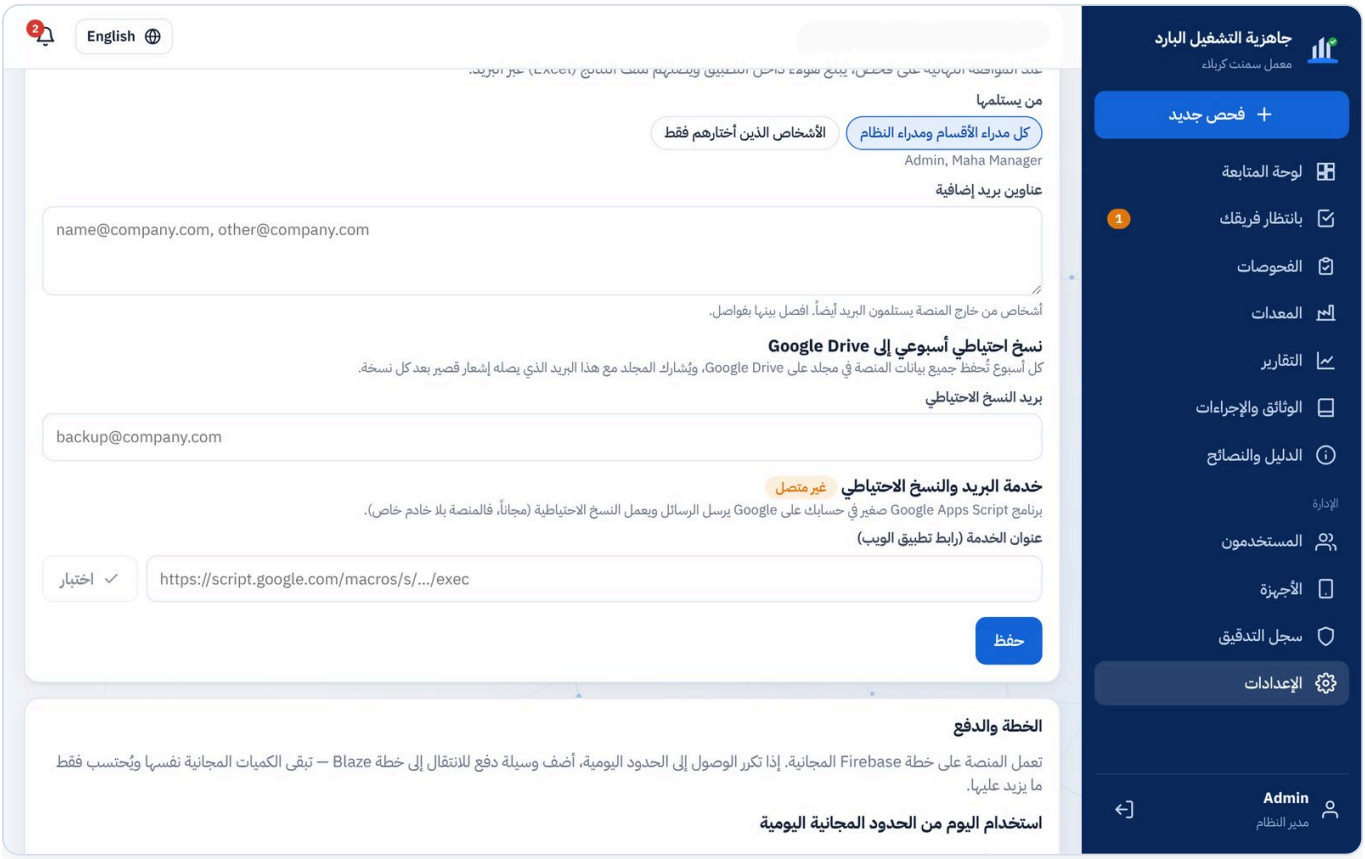


إعدادات التقارير والبريد والنسخ الاحتياطي

الإعداد لمرة واحدة لخدمة البريد والنسخ الاحتياطي

1. افتح **script.google.com** ← **مشروع جديد**.
2. الصق **Code.gs** من **platform/email-backup-service**. في إعدادات المشروع فعّل "Show appsscript.json" واستبدله بالملف الذي يحمل الاسم نفسه.
3. اكتب **WEB_API_KEY** في أعلى Code.gs (مفتاح الويب لتطبيق Firebase). اختر **Run** ← **setup** واسمح بالأذونات — هذا يجدول النسخ الأسبوعي (الجمعة 02:00) وفحص الاستخدام (كل 30 دقيقة).
4. **Web app** ← **New deployment** ← **Deploy**، التنفيذ باسم **Me** والوصول **Anyone**. انسخ رابط /exec إلى الإعدادات واضغط اختبار.

14 المساعدة داخل المنصة

يشرح **الدليل والنصائح** في القائمة كل خطوة حسب دورك، ويوفر هذا الدليل بصيغة PDF. تظهر نصائح قصيرة أعلى الصفحات الرئيسية؛ أغلق أياً منها بـ ×.

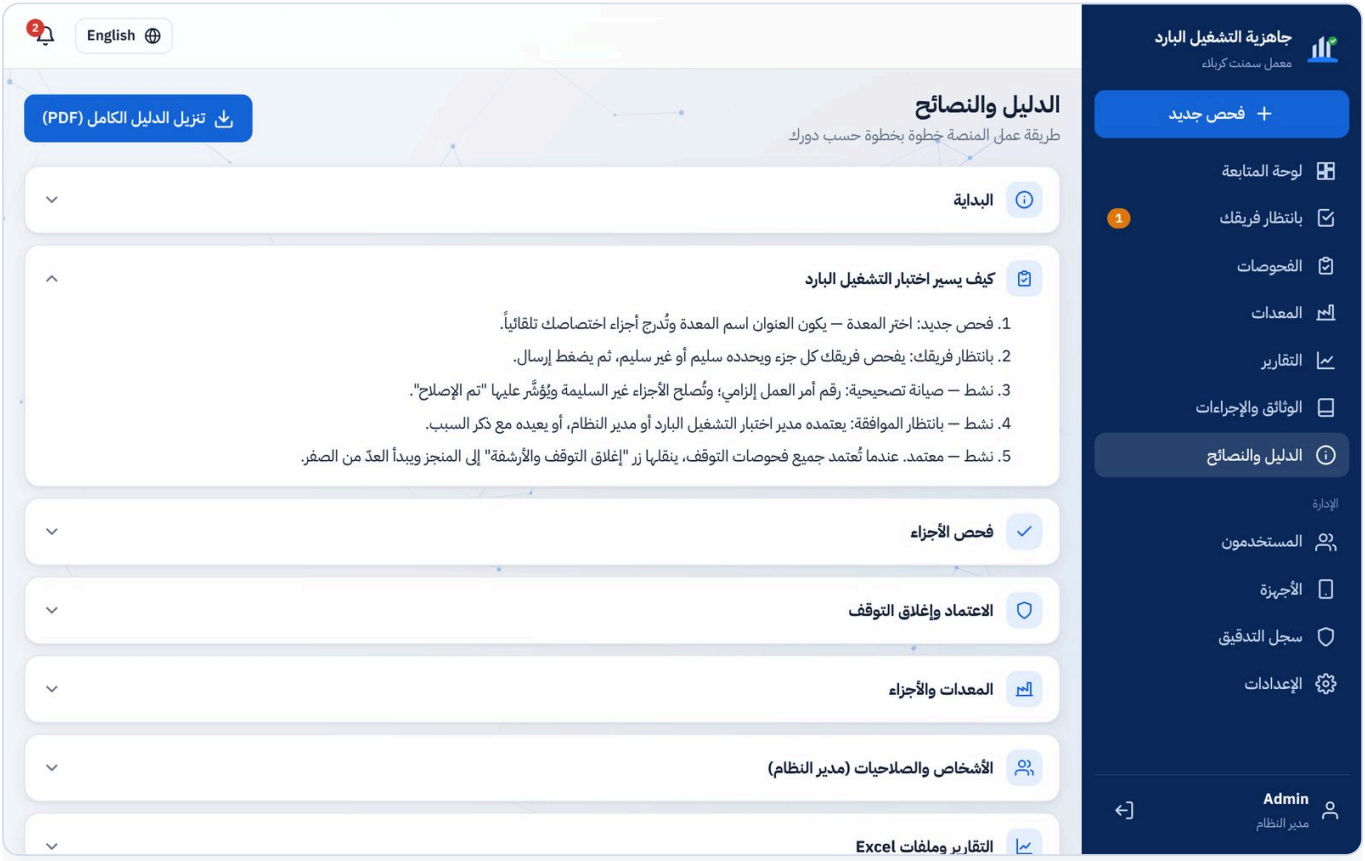

الدليل والنصائح

15 الممارسات الجيدة

1. استخدم حسابك الخاص؛ وعلى الأجهزة المشتركة سجّل الخروج في نهاية الوجبة.
2. صف المشكلات بوضوح وأضف الصور — كل شيء يُوقَّع باسمك والوقت.
3. عدت للاتصال بعد العمل دون تغطية؟ انتظر اختفاء أيقونة المزامنة قبل إغلاق التطبيق.
4. المدراء: أغلقوا التوقف فقط عند اكتمال التشغيل البارد فعلاً — لا يمكن التراجع عن الأرشفة.
5. للبقاء على الخطة المجانية: احذفوا الفحوصات المنشأة بالخطأ (الصور تأخذ معظم المساحة) وتصرّفوا عند وصول تنبيهات الاستخدام عند 75% و90%.

مهم تشغيل المعدات يتبع دائماً إجراءات العزل والإقفال والتصاريح وتخويل التشغيل في المعمل.

16 أسئلة ومشكلات

المشكلة	الحل
"لا يوجد ملف لحسابك بعد"	اطلب من مدير النظام إضافتك بالبريد نفسه الذي تستخدمه.
لا أرى أي معدة لأبدأها	لا توجد بعد معدات في قسمك لها أجزاء من اختصاصك، أو لم يُحدد دورك/قسمك. اسأل المدير.
"هذا الفحص موجود مسبقاً"	بدأه فريقك مسبقاً — يُفتح لتتابع العمل.
يطلب رقم أمر العمل	بعض الأجزاء غير سليمة: أدخل رقم أمر العمل الصادر للإصلاح. بدونه لا ينتقل الفحص إلى الصيانة التصحيحية.
زر الإرسال غير مفعّل	بعض الأجزاء لم تُفحص بعد؛ يوضح الشريط أسفل الصفحة عددها.
زر الأرشفة لا يظهر	لم تُعتمد جميع فحوصات التوقف بعد.
تم تخطي صفوف في ملف CSV	توضح المعاينة السبب: قسم غير معروف، أو اسم معدة فارغ، أو نوع جزء غير معروف.
اخترت ✓ أو ✗ خطأً	اضغط الزر المؤشَّر مرة أخرى لإلغاء الجزء ثم اختر من جديد.
لا أرى التقارير أو الإعدادات	يرى أعضاء الفريق عملهم فقط؛ التقارير والإعدادات للمدراء ومديري النظام. بياناتك الشخصية في **ملفي الشخصي**.
سنة التوقف الجديد غير صحيحة	يضغط مدير النظام **تعديل** في بطاقة التوقف ويحدد الاسم والسنة.
وصل بريد تنبيه الاستخدام	راجع الإعدادات ← الخطة والدفع. عند 90–100% إما انتظر بدء اليوم الجديد أو أضف وسيلة دفع.
لم يصل بريد كلمة المرور	تحقق من البريد غير المرغوب، أو استخدم "نسيت كلمة المرور؟"، أو اطلب من المدير إعادة الإرسال.