English


Cold Run Readiness

User & Administrator Guide — from A to Z

Karbala Cement Plant · Yearly shutdown

https://kcml-coldrun.web.app

Edition 2026-10-25

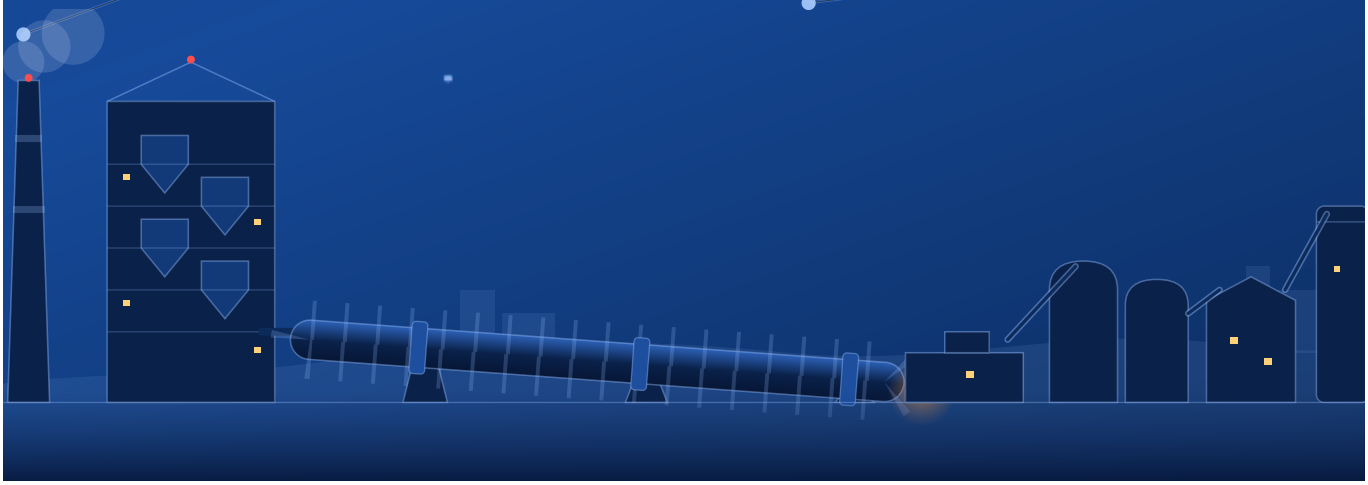

Contents

1 About the platform

2 Getting access

3 Roles

4 The workflow

5 Waiting in your pool & starting an inspection

6 Checking the parts

7 Corrective maintenance

8 Approval

9 Closing the shutdown & archiving

10 Equipment and parts (CSV)

11 Reports and Excel

12 People and access

13 Settings, report e-mails and backup

14 Help inside the platform

15 Good practice

16 Questions and problems

1 About the platform

Cold Run Readiness organises the cold run tests of the yearly shutdown. Every piece of equipment has mechanical, electrical, instrumentation and production parts. Each team checks the parts of its own discipline, Not OK parts go through corrective maintenance, and the Cold Run Test Manager approves the result.


The ten departments are **Raw Mill 1 and 2**, **Kiln 1 and 2**, **Cooler 1 and 2** and **Cement Mill 1 to 4** (the administrator can rename, add or retire them). The platform works in Arabic and English, on phones, tablets and computers, and keeps working without a network connection.

> **Important** Approval documents readiness only. It never authorizes operation, never bypasses interlocks and never replaces LOTO, work permits or the formal operating authorization of the plant.

2 Getting access

For Everyone

Open **https://kcml-coldrun.web.app** in Chrome, Edge or Safari. The administrator adds you first; you then receive an e-mail to set your password.

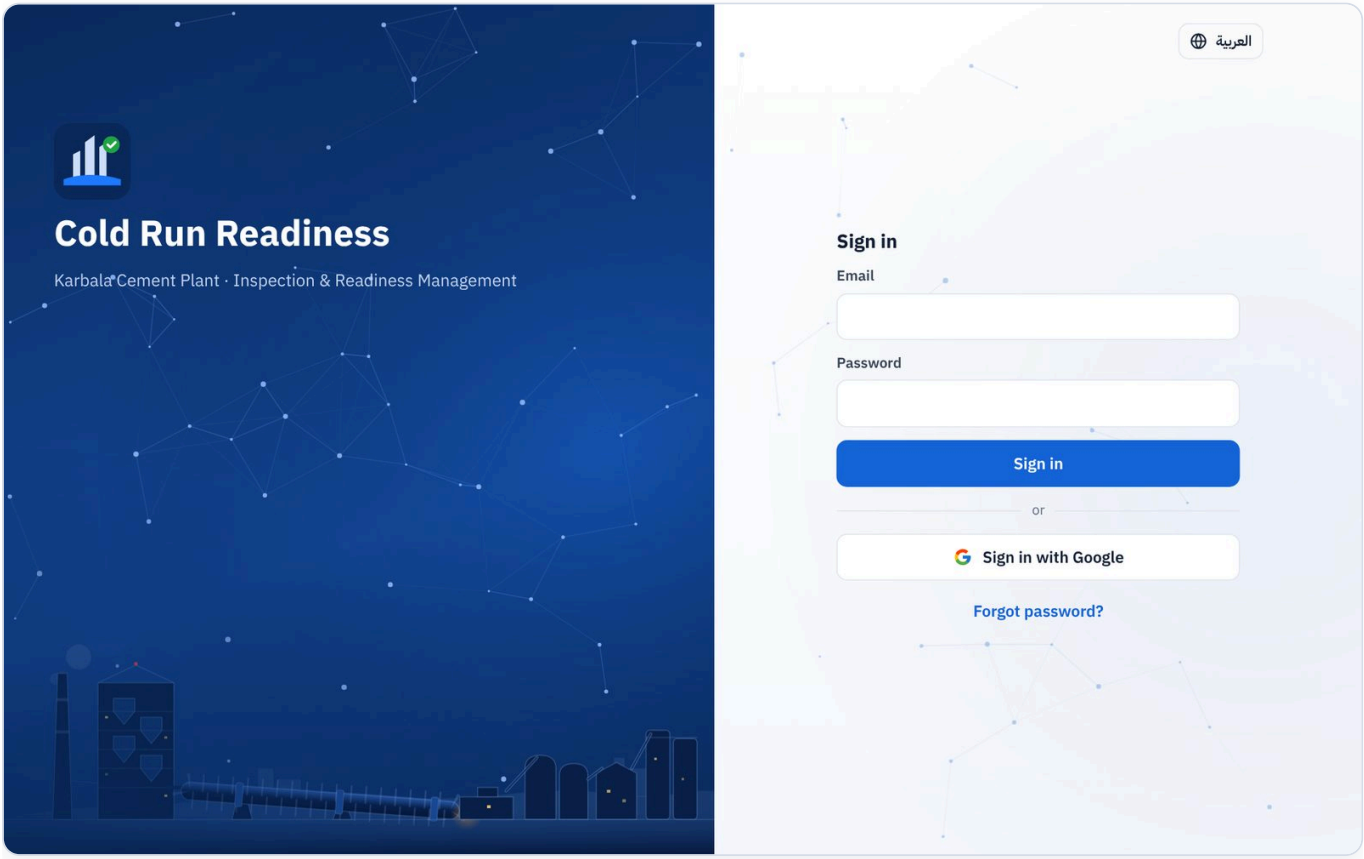


The sign-in page

1. **With a password:** open the e-mail "Reset your password", choose a password of at least 8 characters, then sign in with your e-mail and that password.
2. **With Google:** press **Sign in with Google** and choose the same e-mail the administrator added.
3. **Forgot your password?** Type your e-mail on the sign-in page and press **Forgot password?**.
4. Switch language at any time with the **العربية / English** button at the top.

Install the app

1. **Android / computer:** press **Install** in the pop-up that appears when you open the site.
2. **iPhone / iPad:** press the Share button in Safari, then **Add to Home Screen**.

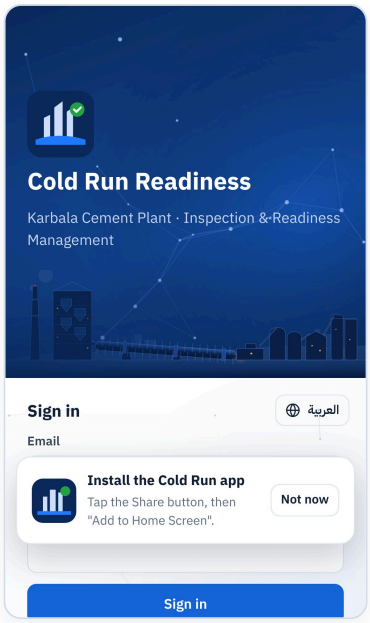


The install pop-up on an iPhone


Tip No signal on site? Keep working. Your changes are kept on the device and sent automatically when the connection returns.

3 Roles

Role	What they do
System Administrator	Everything: users, devices, departments, settings, equipment, approval and archive; renames shutdowns and corrects their year; deletes inspections made by mistake; plan, usage and billing.
Cold Run Test Manager	Sees every team. Approves or sends back inspections, closes the shutdown and archives, manages equipment, sees reports and the audit log, receives the completion reports.
Team Member	Has a discipline (Mechanical, Electrical, Instrumentation or Production) and a department. Sees, starts and checks only the inspections of that discipline in that department, and does the corrective maintenance. No reports, settings or administration — the menu shows **My profile** instead of Settings.

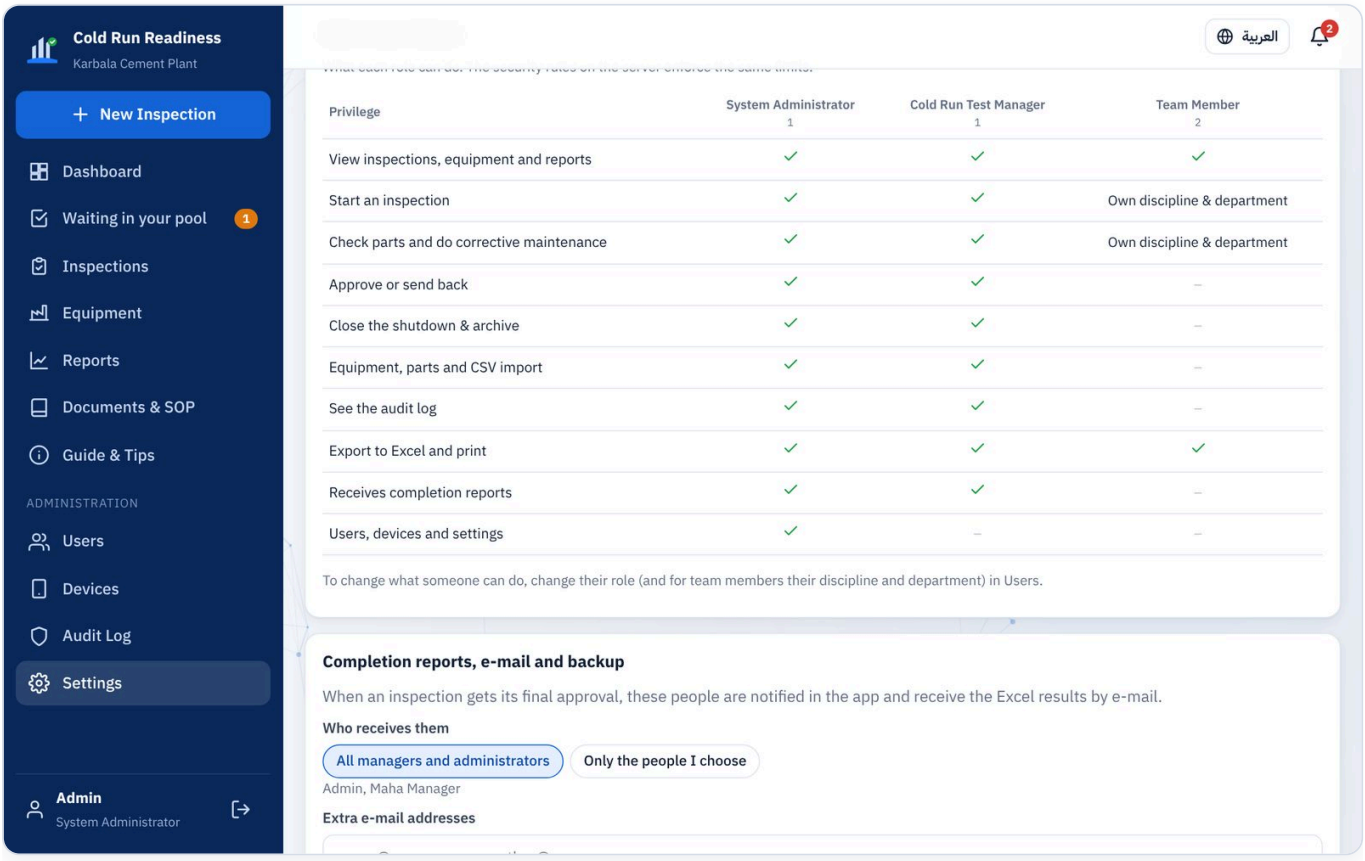

Settings → Roles & privileges

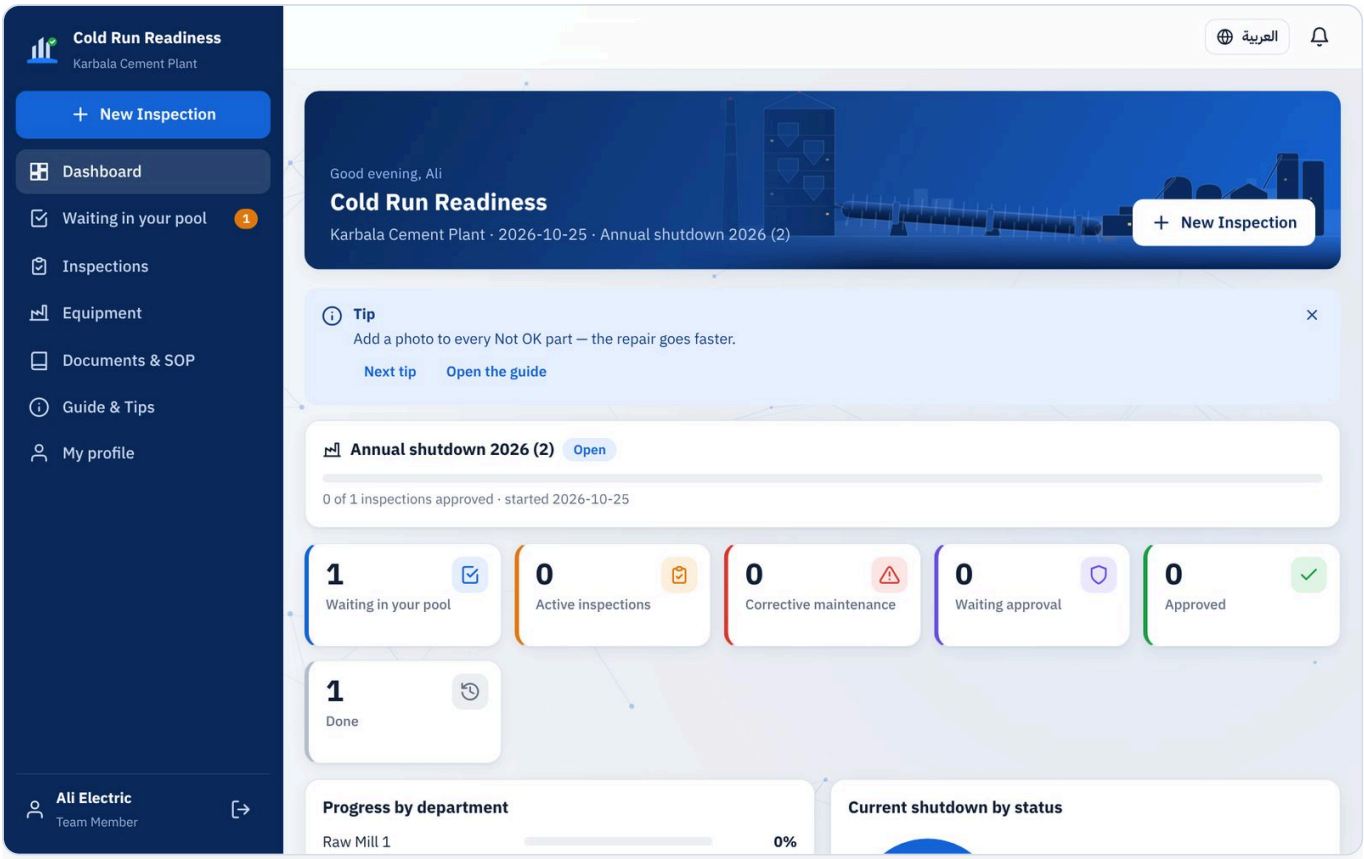


What a team member sees: only their own work, and My profile instead of Settings

The same limits are enforced by the security rules on the server, so they cannot be bypassed from a device. For example, an electrical engineer of Kiln 1 only sees and works on the electrical inspections of Kiln 1; a member without a department works on their discipline in every department.

4 The workflow

Each inspection covers one piece of equipment and one discipline. There is one per equipment and discipline in each shutdown.

Stage	What happens
New Inspection	A team member (or the manager) starts it for an equipment. The title is the equipment name.
Waiting in pool	The team checks every part: OK or Not OK. Then presses Submit.
Active · Corrective maintenance	At least one part was Not OK. A work order number is required; the team repairs the part and marks it Fixed.
Active · Waiting approval	Everything is OK or fixed. The Cold Run Test Manager reviews it.
Active · Approved	Approved. Management is notified and receives the Excel results.
Done	When all inspections are approved, the manager closes the shutdown: everything moves to Done and the active count goes back to 0. The next shutdown keeps the same year until the administrator changes it.

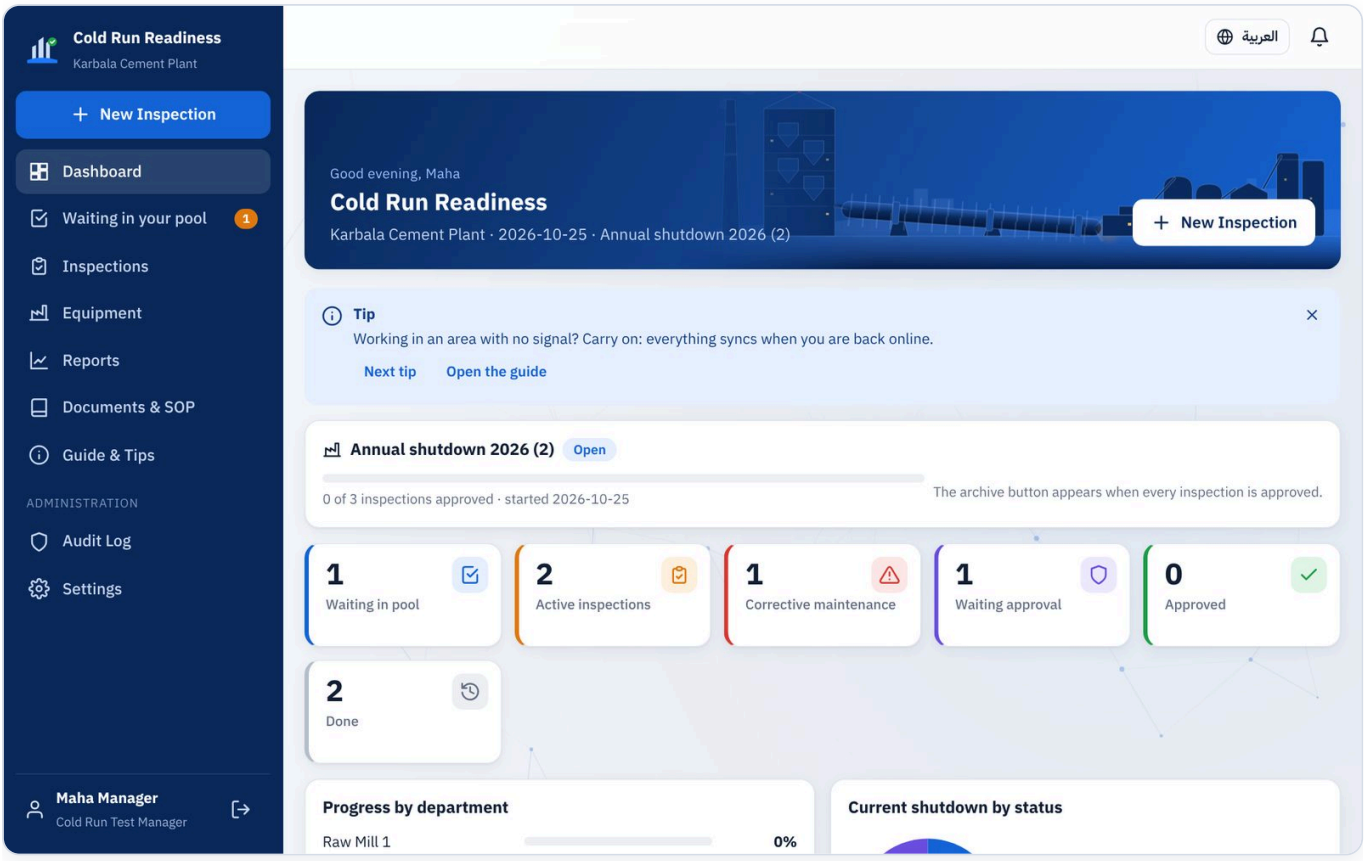


Dashboard: the plant banner, the shutdown, your pool, the active inspections and Done

5 Waiting in your pool & starting an inspection


For Team members

Waiting in your pool shows everything for your team (discipline + department): inspections to check, Not OK parts to fix, and the equipment nobody has started yet.

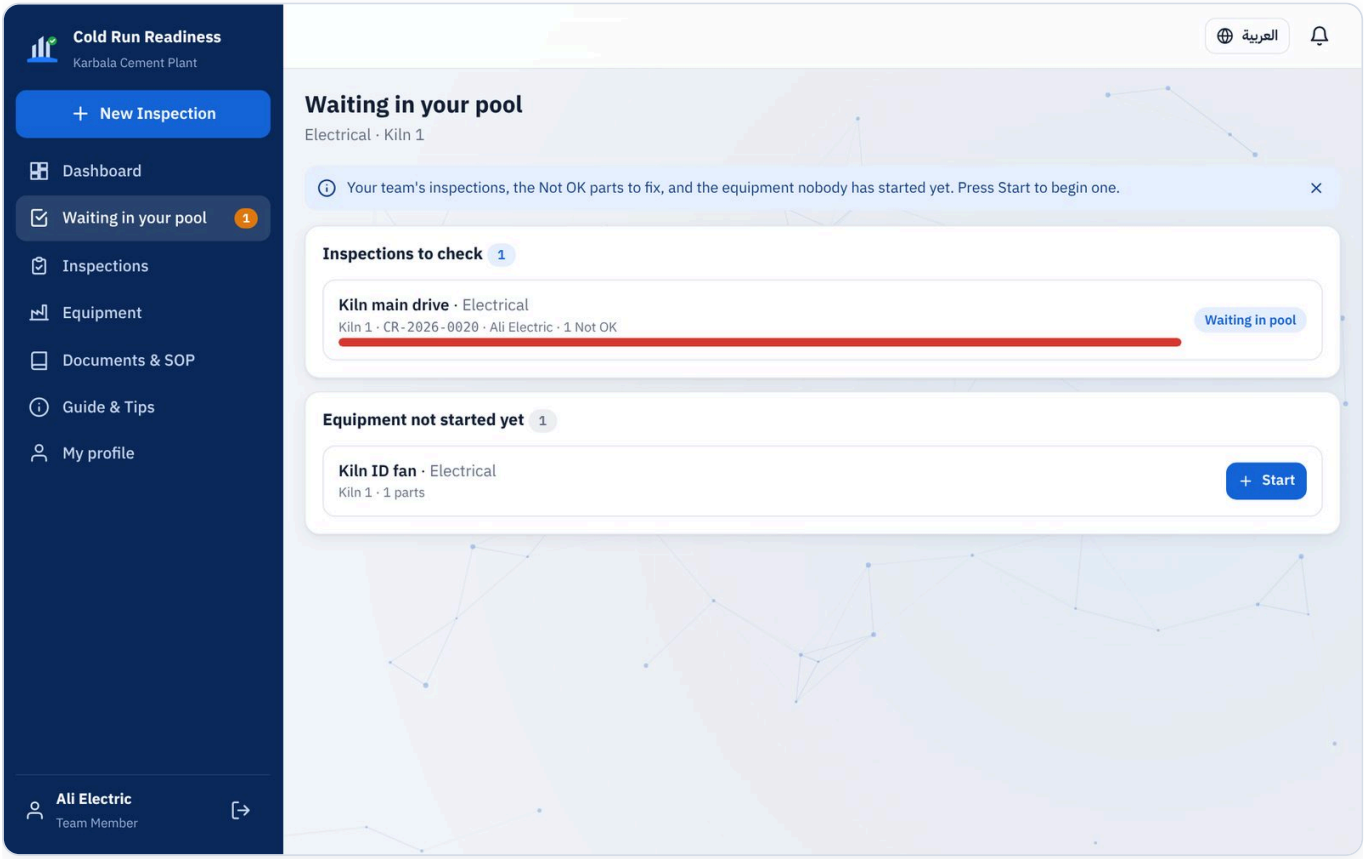

Waiting in your pool, with the equipment not started yet

1. Press **Start** next to an equipment — or use **New Inspection** and choose the equipment.
2. Your department and discipline are filled in for you; the title is the equipment name and the parts of your discipline are listed.
3. Press **Create inspection**. If your team already started it, the existing one opens instead.

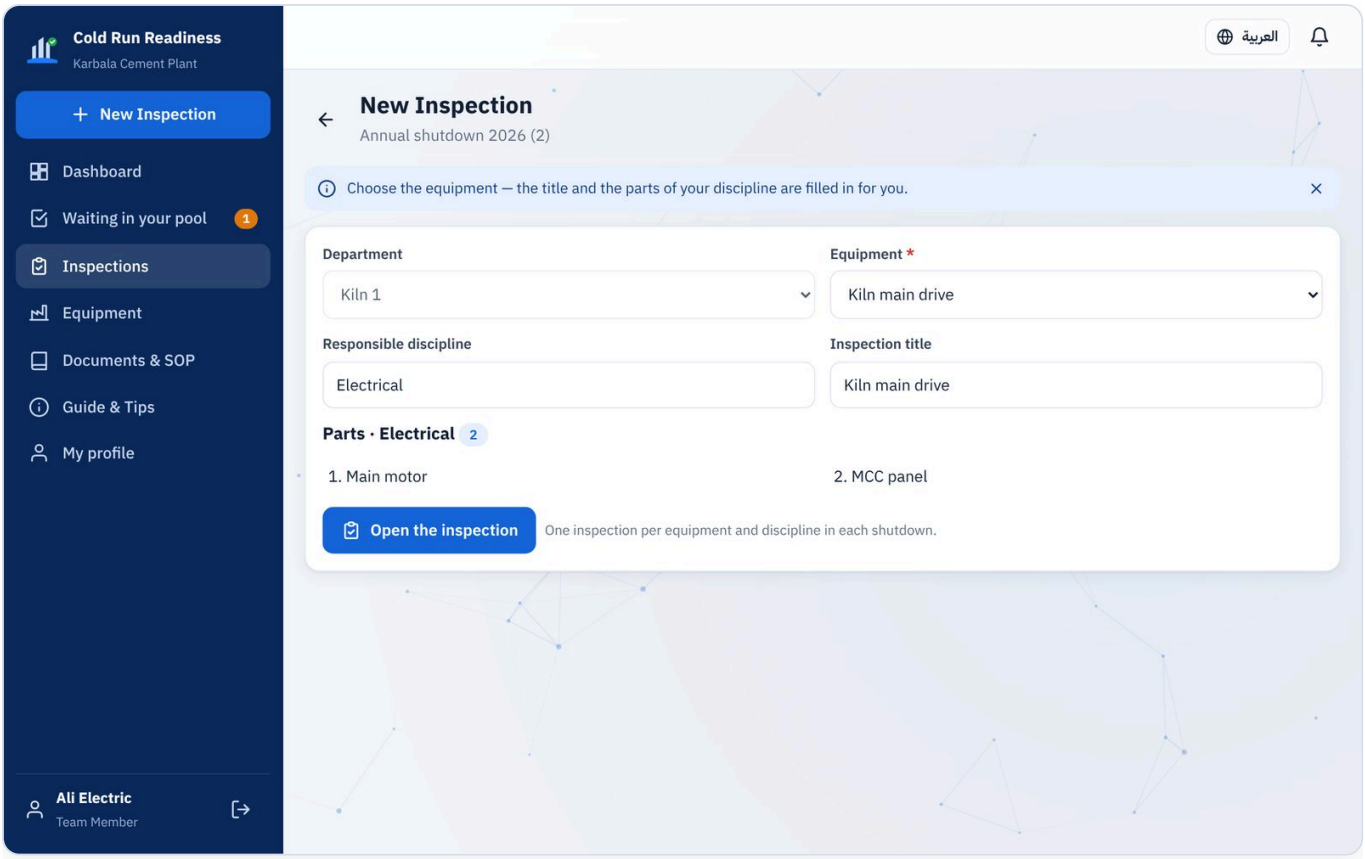


New Inspection


6 Checking the parts

For Team members

1. For each part press ✓ (OK) or ✕ (Not OK).
2. Not OK asks for a short description of the problem. Add a photo with the camera button, then **Save as Not OK**.
3. Chose wrongly? Tap the highlighted ✓ again to clear it. Tapping a highlighted ✕ asks first, because it removes the note and photo; use **Edit** to change only the note.
4. Colleagues of the same team can work on the same inspection; everything is saved as you go.
5. When every part is checked, press **Submit inspection**. With a Not OK part the platform asks for the **work order** number raised in the maintenance system (required), then the inspection goes to **Corrective maintenance**; otherwise to **Waiting approval**.

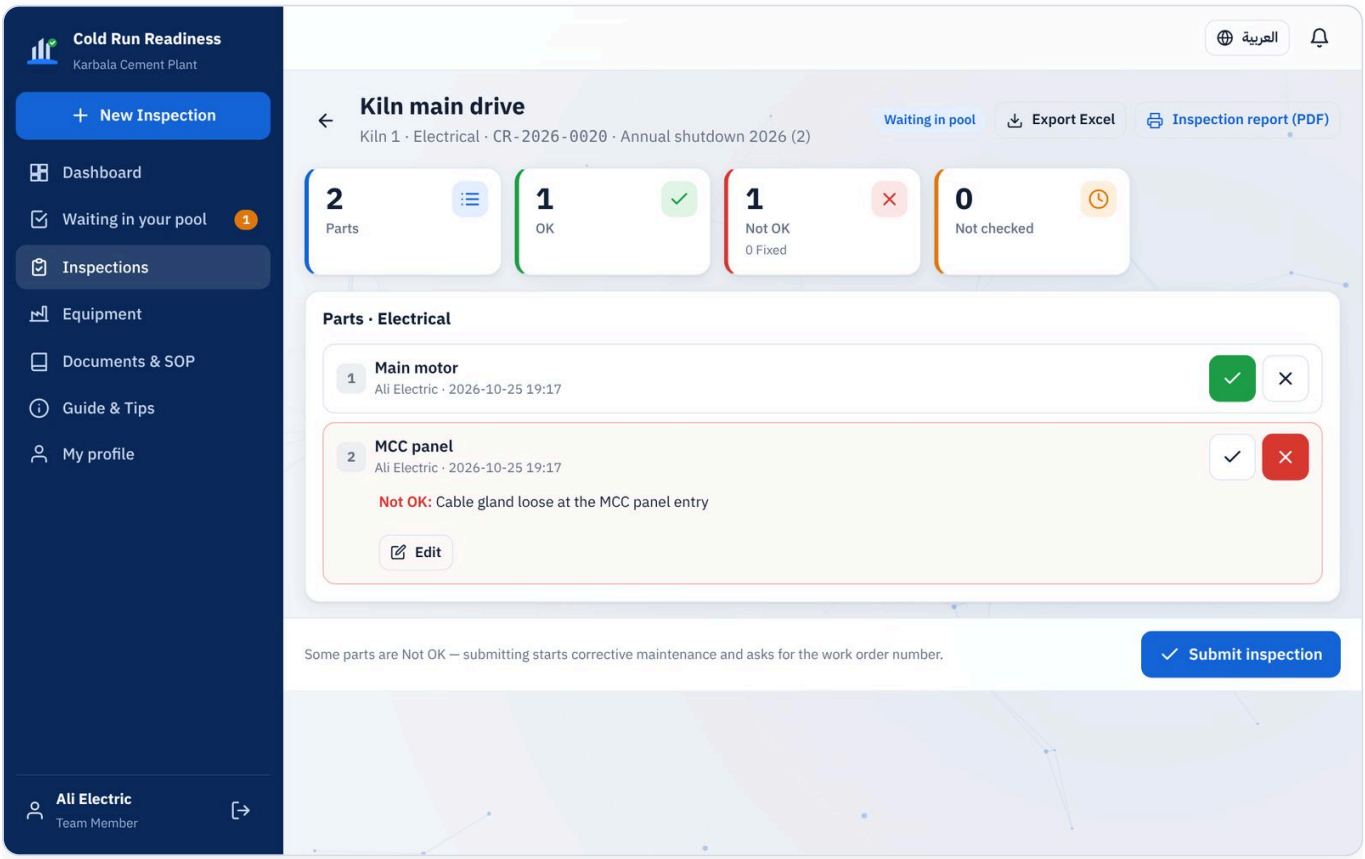

Parts checked: one OK, one Not OK with its description and photo

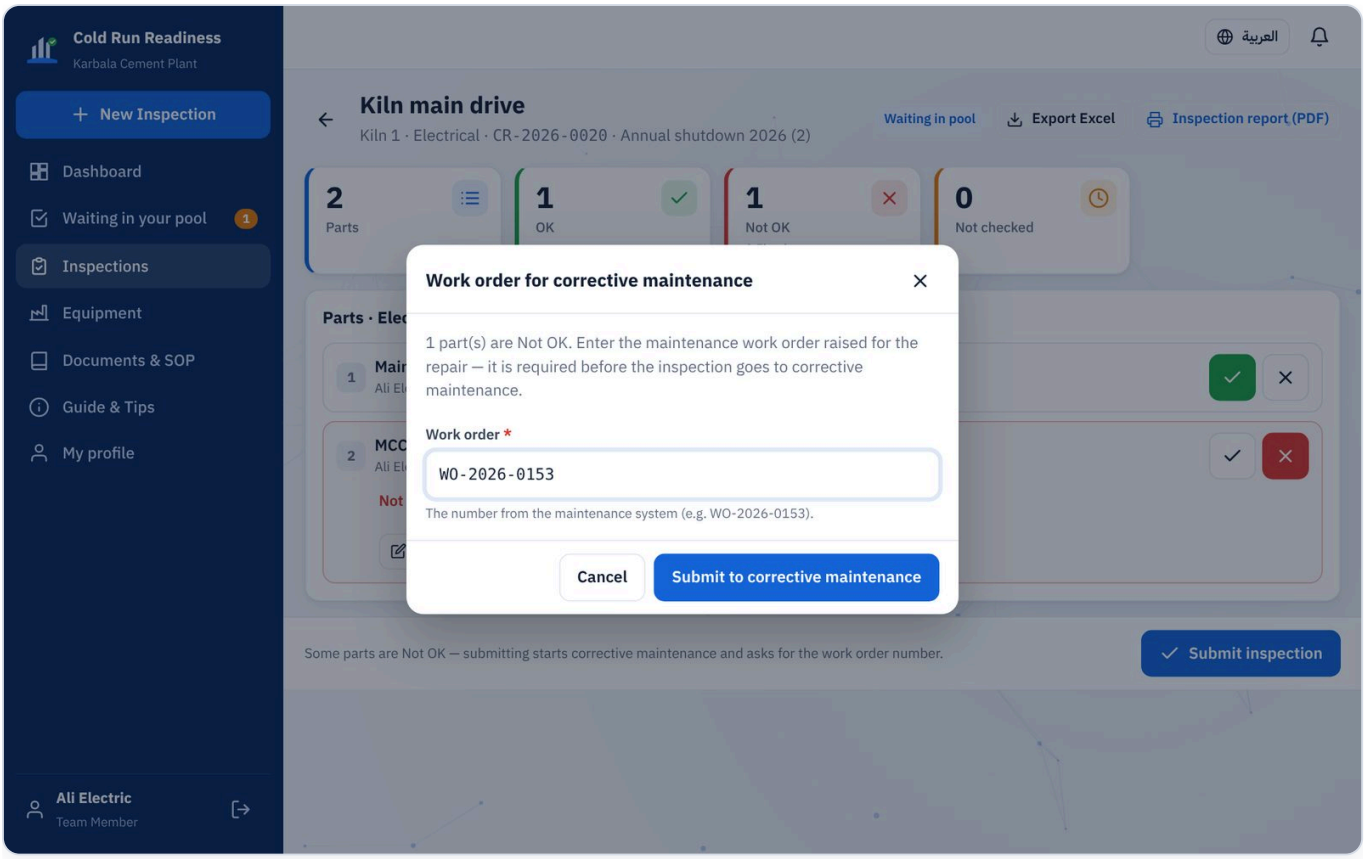


Submitting with a Not OK part: the work order number is required

Tip Add a photo to every Not OK part — it saves time for the repair and for the approval.

7 Corrective maintenance

For Team members

1. The inspection is in **Waiting in your pool** under **Corrective maintenance**, with its **work order** number at the top. Wrong number? Press **Edit** next to it (possible until the inspection leaves corrective maintenance).
2. After the repair, open the Not OK part and press **Mark fixed**. Write what was done and add an "after" photo.
3. When the last Not OK part is fixed, the inspection moves to **Waiting approval** automatically.

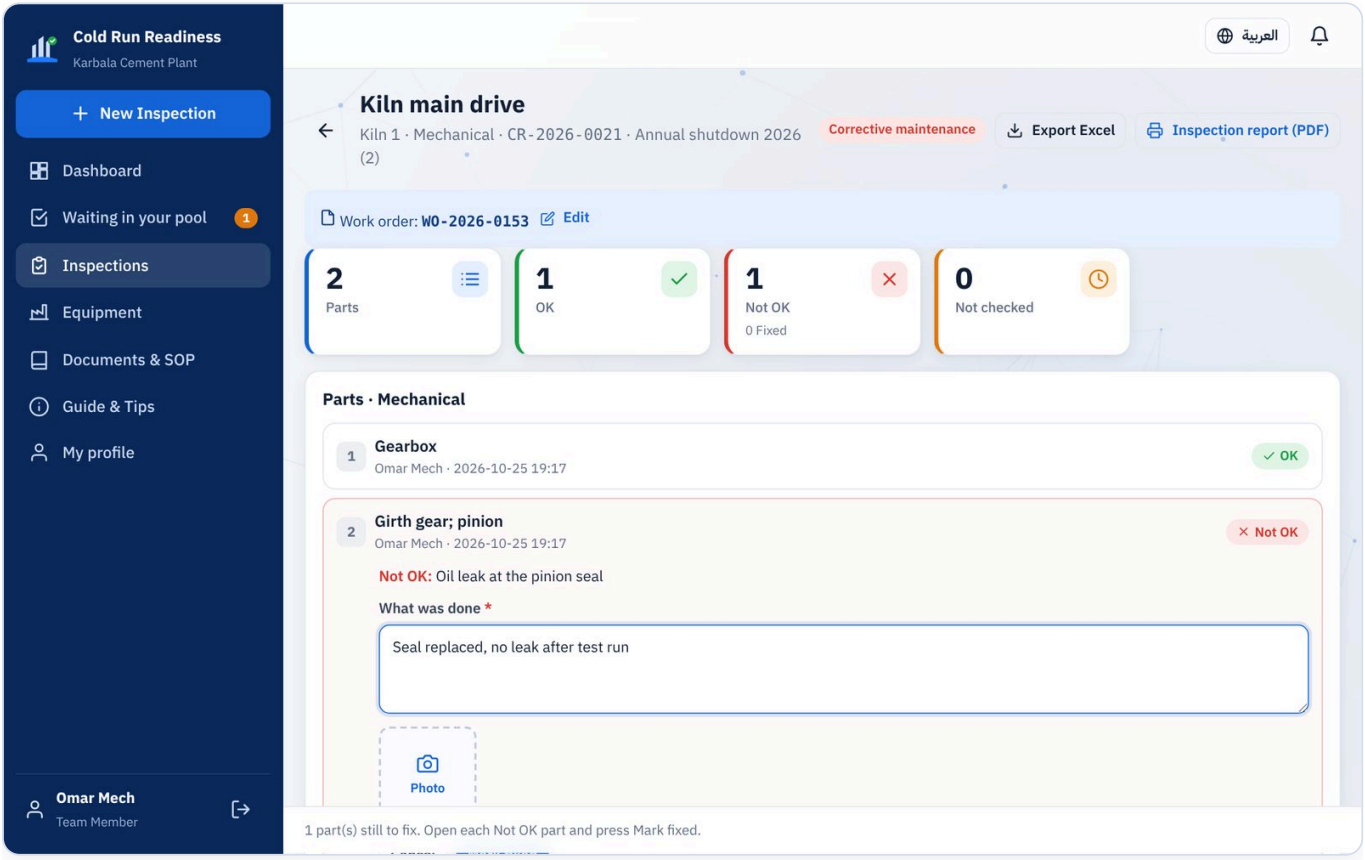


Corrective maintenance: the problem and Mark fixed

8 Approval

For Cold Run Test Manager, administrator

1. **Waiting in your pool** (or Inspections → Active → Waiting approval) lists what needs you.
2. Open the inspection and review the parts, the problems, the fixes and the photos.
3. Press **Approve** (an optional comment), or **Send back** with a reason — it returns to the team's pool and they see your reason.
4. On approval the report recipients are notified in the app and, when the e-mail service is connected, receive the Excel results.

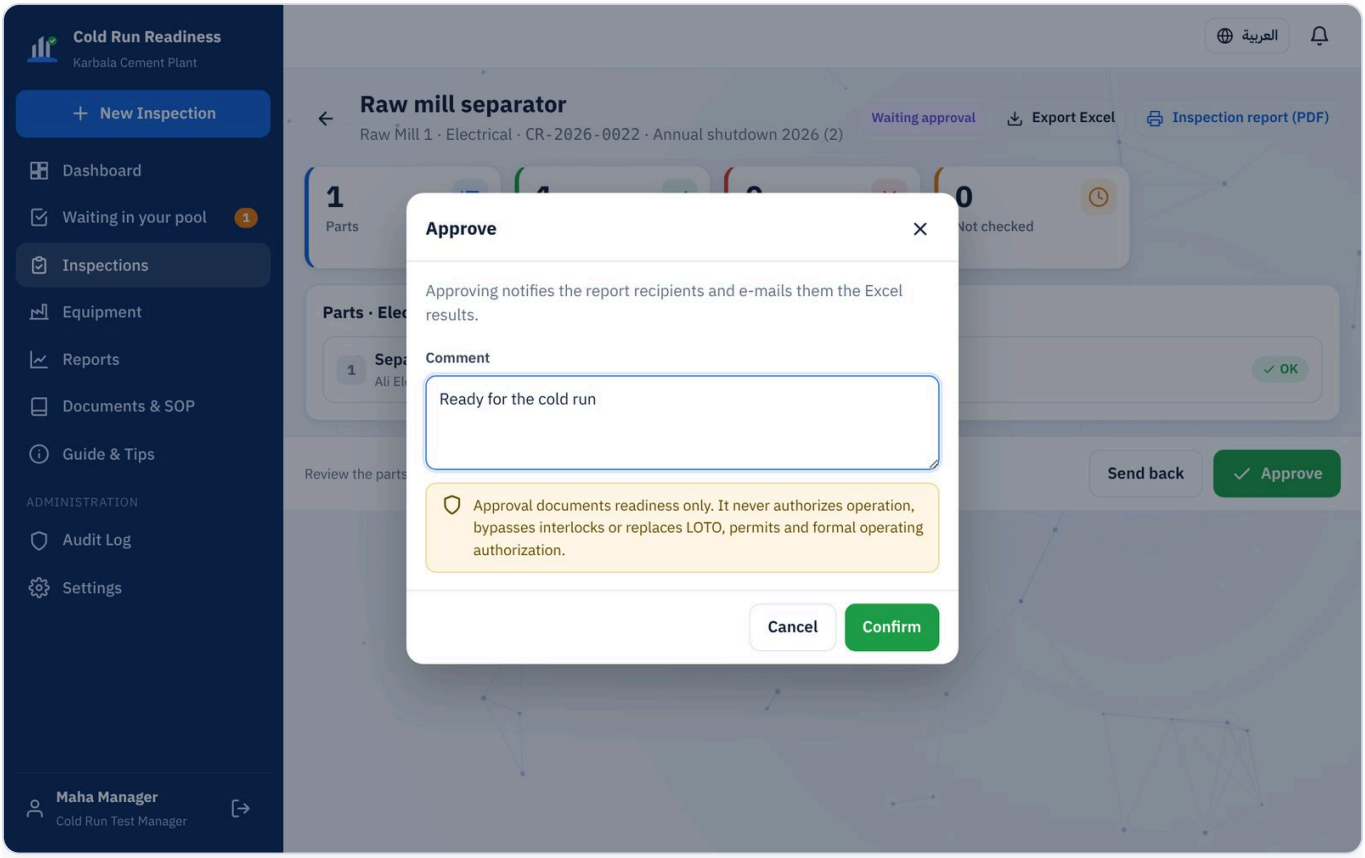

Approving an inspection


9 Closing the shutdown & archiving

For Cold Run Test Manager, administrator


The shutdown card on the Dashboard and Inspections shows how many inspections are approved. When **every** inspection of the shutdown is approved, the button **Close shutdown & archive** appears.

1. Press **Close shutdown & archive** and confirm.
2. All approved inspections move to **Done**, the active count goes back to **0**, and the next shutdown starts with the **same year** — the administrator sets the new year and name by hand (**Edit** on the shutdown card).
3. Done inspections stay available: Inspections → Done, filter by shutdown, export to Excel.

> **Tip** Administrators can rename a shutdown or project, or correct its year: **Edit** on the shutdown card, or **Settings → Shutdowns & projects** for past ones. The new name appears on all its inspections, reports and exports.

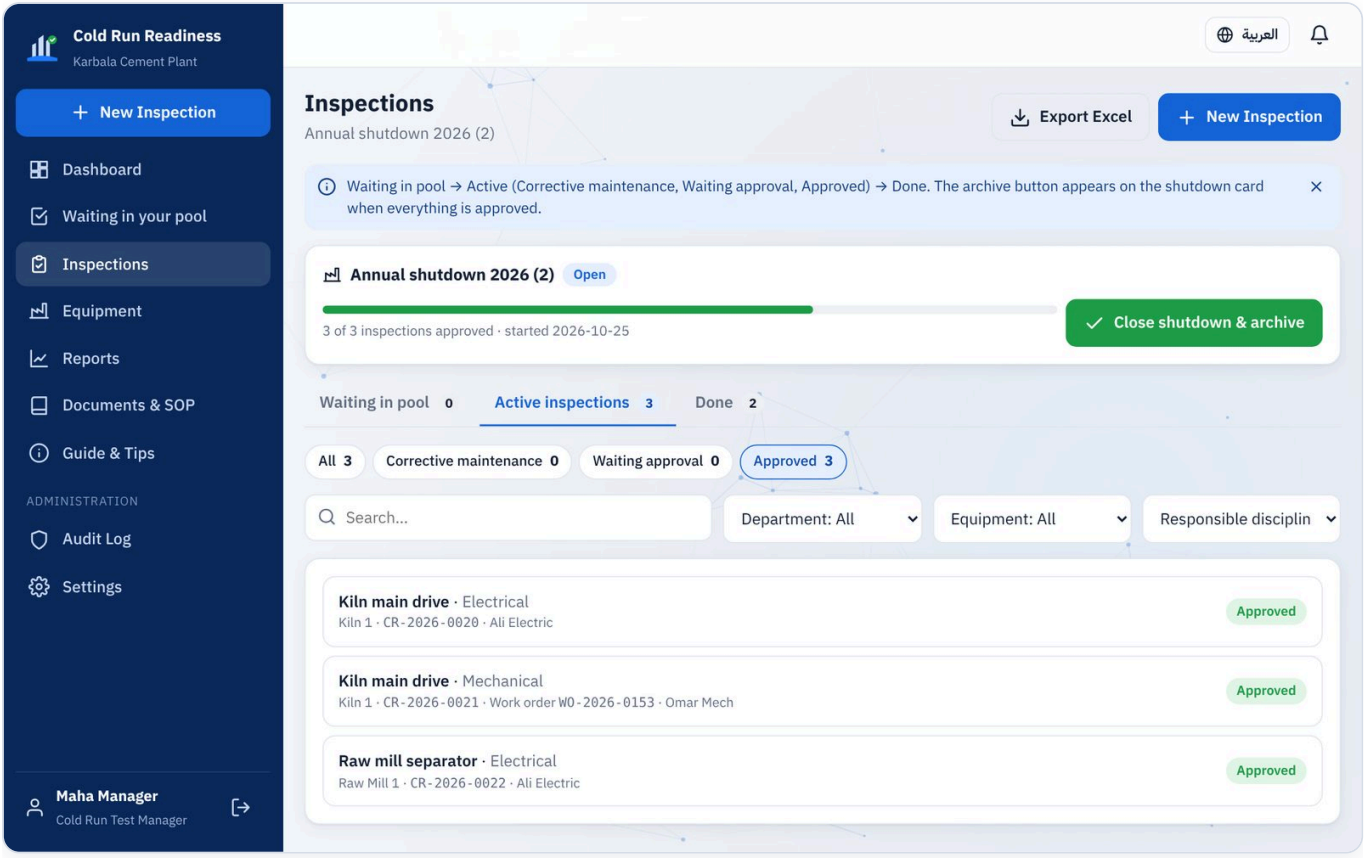

Everything approved: the archive button on the shutdown card

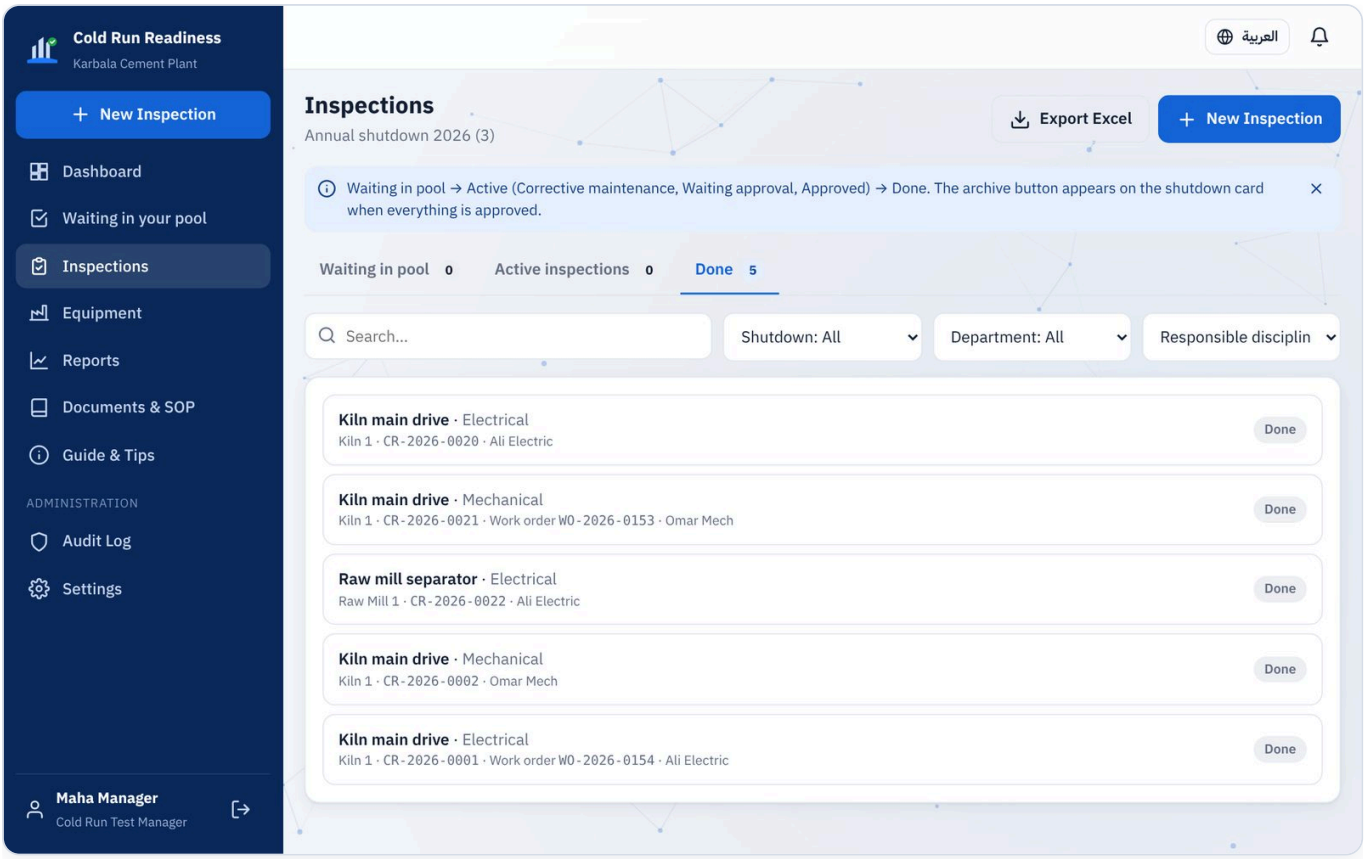


Inspections → Done

10 Equipment and parts (CSV)

For Cold Run Test Manager, administrator

1. **Equipment → Download CSV**. You get the current list (or an example when empty).
2. Open it in Excel and fill **one row per part**: Department, Equipment, Part type, Part. Part type is Mechanical, Electrical, Instrumentation or Production (Arabic names work too).
3. Save as **CSV UTF-8** and press **Upload CSV**.
4. Check the preview — new and updated equipment, and any rows with problems — then press **Import**.


Department	Equipment	Part type	Part
Kiln	Kiln main drive	Electrical	Main motor
Kiln	Kiln main drive	Mechanical	Gearbox
Raw Mill	Raw mill separator	Instrumentation	Speed sensor

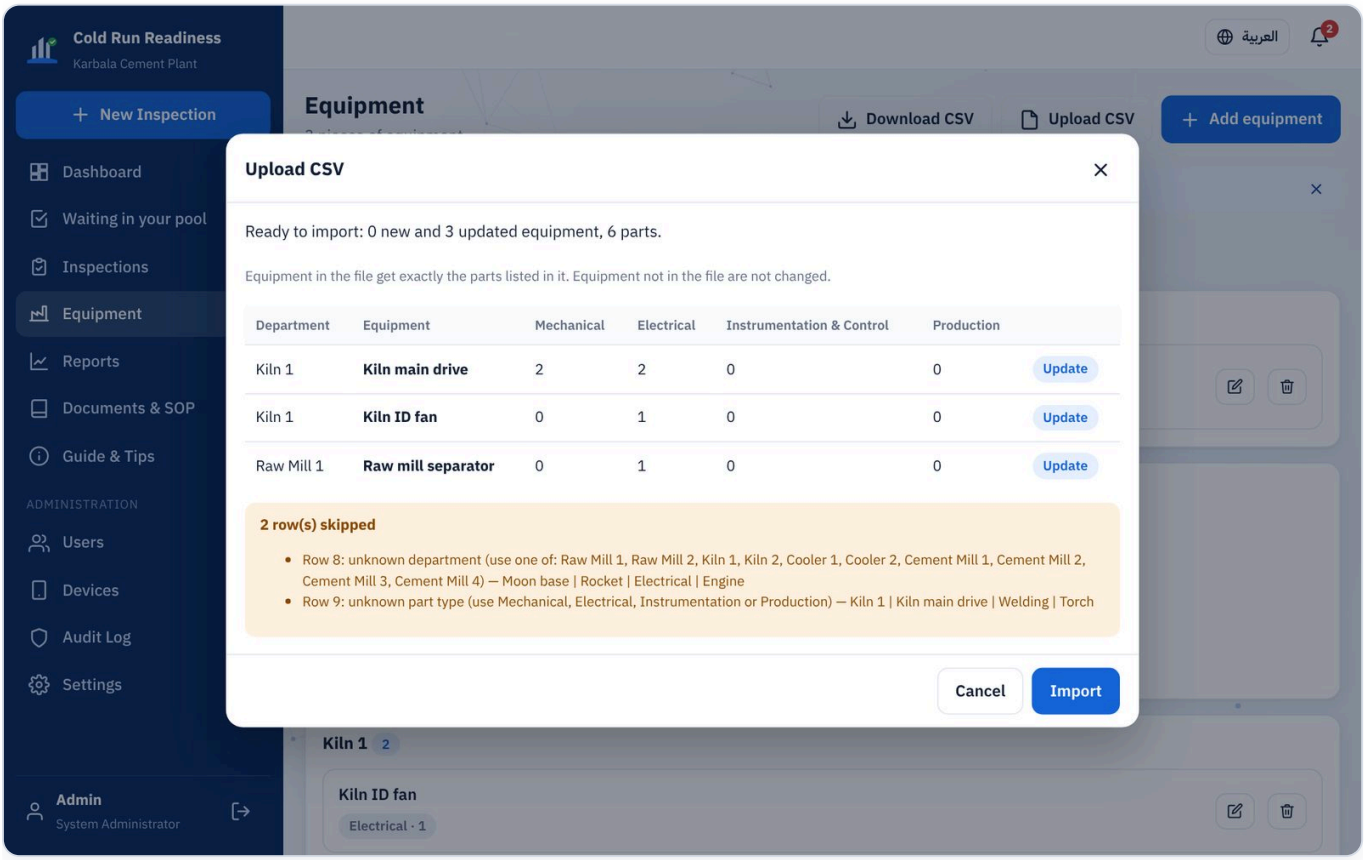

Upload preview

Important Equipment in the file get exactly the parts listed in it; equipment not in the file are not changed. Uploading the same file again updates — it never duplicates.

For one change, press the pencil next to an equipment: name, department and one part per line for each discipline.

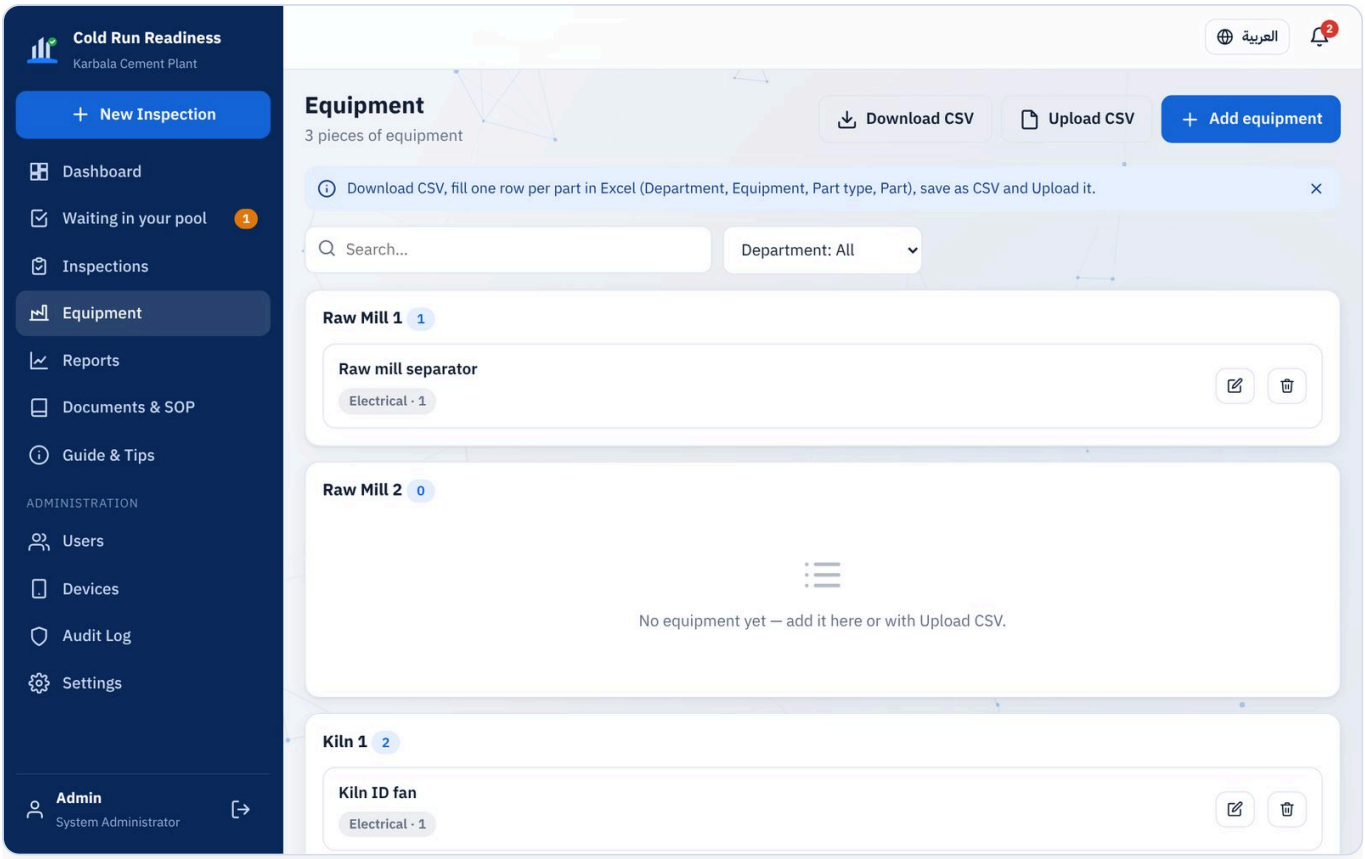


Equipment by department

11 Reports and Excel

For Cold Run Test Manager, administrator

1. Open **Reports** and choose: overview by department, by discipline, Not OK parts & corrective maintenance, equipment not started, all inspections, or work per person.
2. Choose the shutdown and any filters (department, equipment, discipline, status).
3. Press **Export Excel**. The file holds exactly what you see, with the filters written at the top.

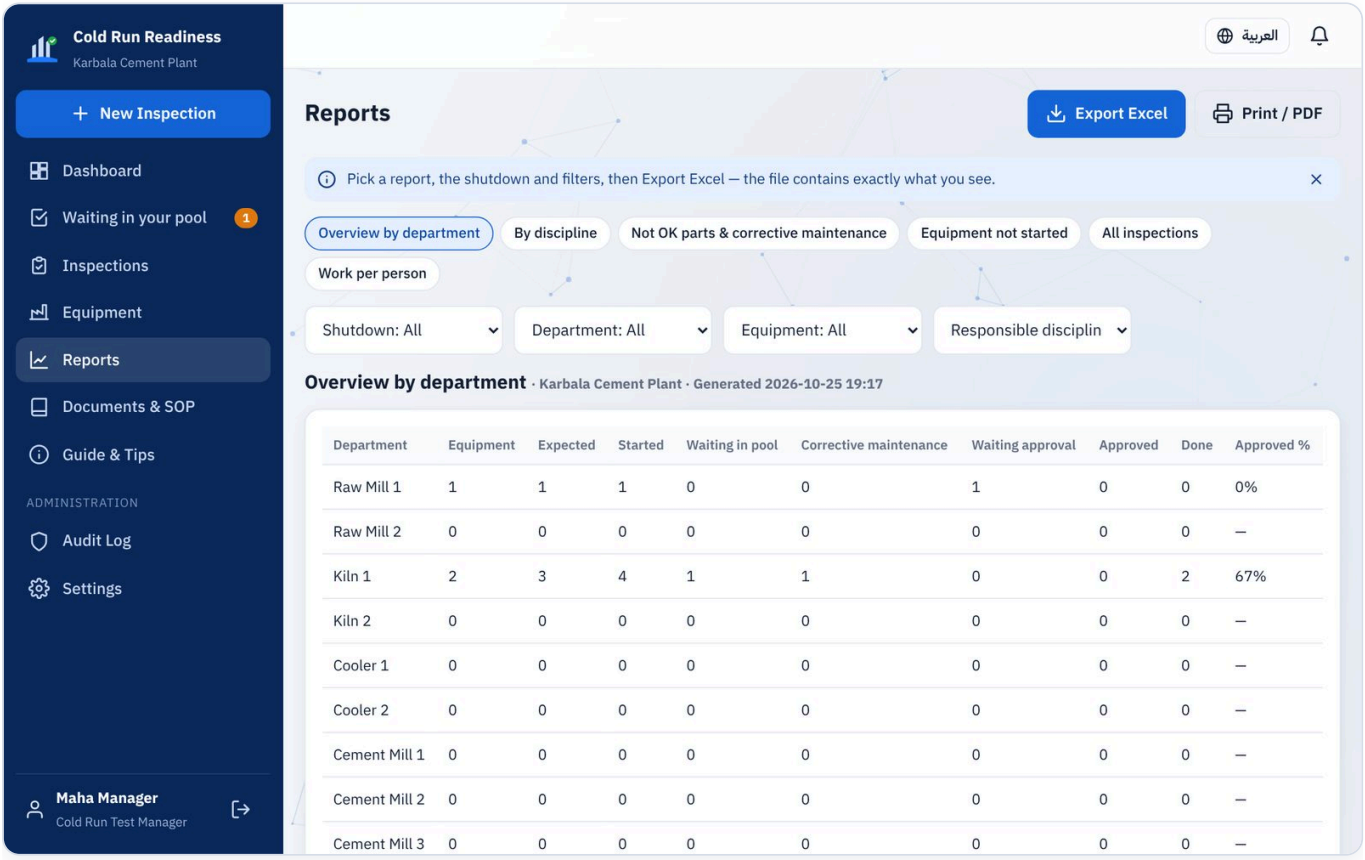


Reports

Every inspection also has **Export Excel** (summary and parts) and **Inspection report (PDF)** for printing and signatures.

12 People and access

For Administrators

1. **Users** → **Add user**: name, e-mail and role. For a **Team Member** also choose the discipline and the department.
2. Leave the password empty: they receive an e-mail to set it, or simply use **Sign in with Google** with that e-mail.
3. Change a role, discipline or department with the pencil. When someone leaves, press **Deactivate** — their history stays.
4. **Devices**: revoke a lost or shared phone and it is signed out immediately.
5. **Departments** (Settings): rename in English and Arabic, change the order, add a department, or retire one — retired departments disappear from pools and menus but their history stays.
6. **Delete an inspection** made by mistake: open it and press **Delete** (administrators only). Its photos are removed too; the deletion stays in the audit log and cannot be undone.

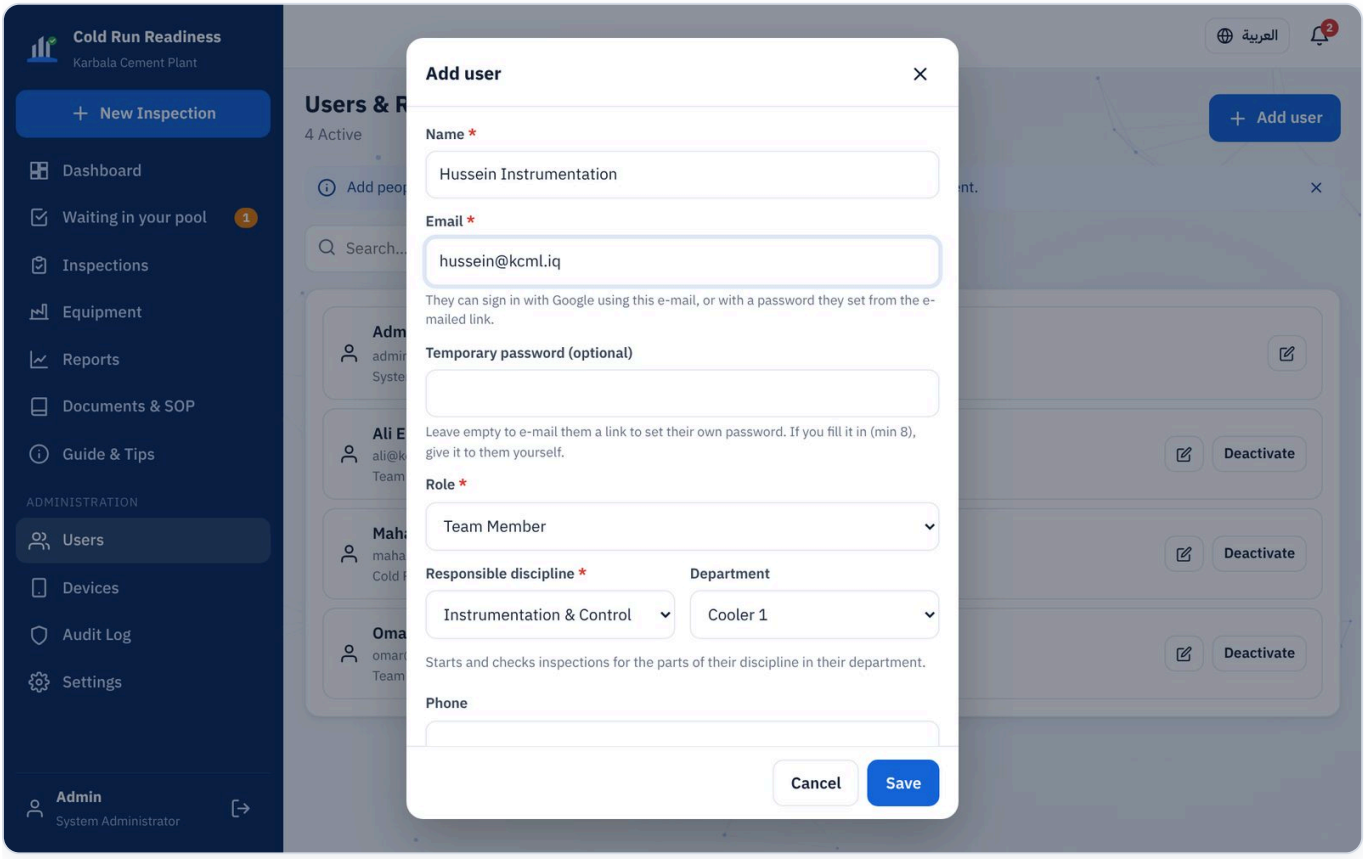

Adding a team member

13 Settings, report e-mails and backup


For Administrators

1. **Who receives the reports:** all managers and administrators (default), or only the people you tick, plus extra e-mail addresses.
2. **Backup e-mail:** the weekly Google Drive backup folder is shared with it.
3. **E-mail & backup service:** paste the service address once and press **Test** — a test e-mail is sent to you and the list of recipients is shown.


Free plan, usage alerts and billing

The platform runs on the free Firebase plan: 50,000 loads, 20,000 saves and 20,000 deletes per day (reset at about 10–11 am Baghdad time) and 1 GB of data. **Settings → Plan & billing** shows today's use. Administrators receive an e-mail at **25%, 50%, 75%, 90% and 100%** of any daily limit, of the stored data and of the daily e-mail quota.

1. **Add payment / upgrade plan** opens the Firebase console: **Modify plan → Blaze**, add the card and set a budget alert. The free amounts stay included; only use above them is charged.
2. **View usage** opens Firebase's own usage page.

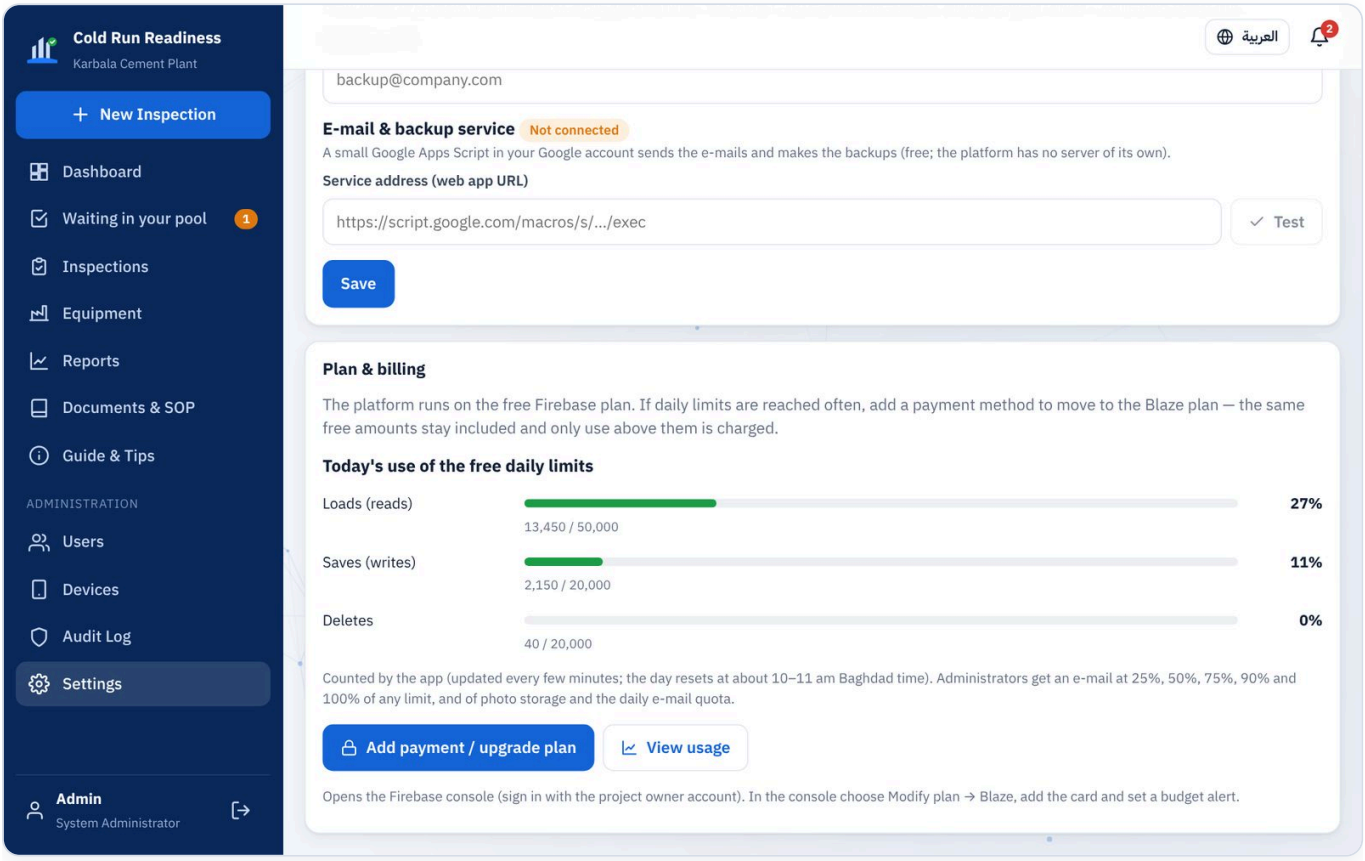

Settings → Plan & billing with today's use

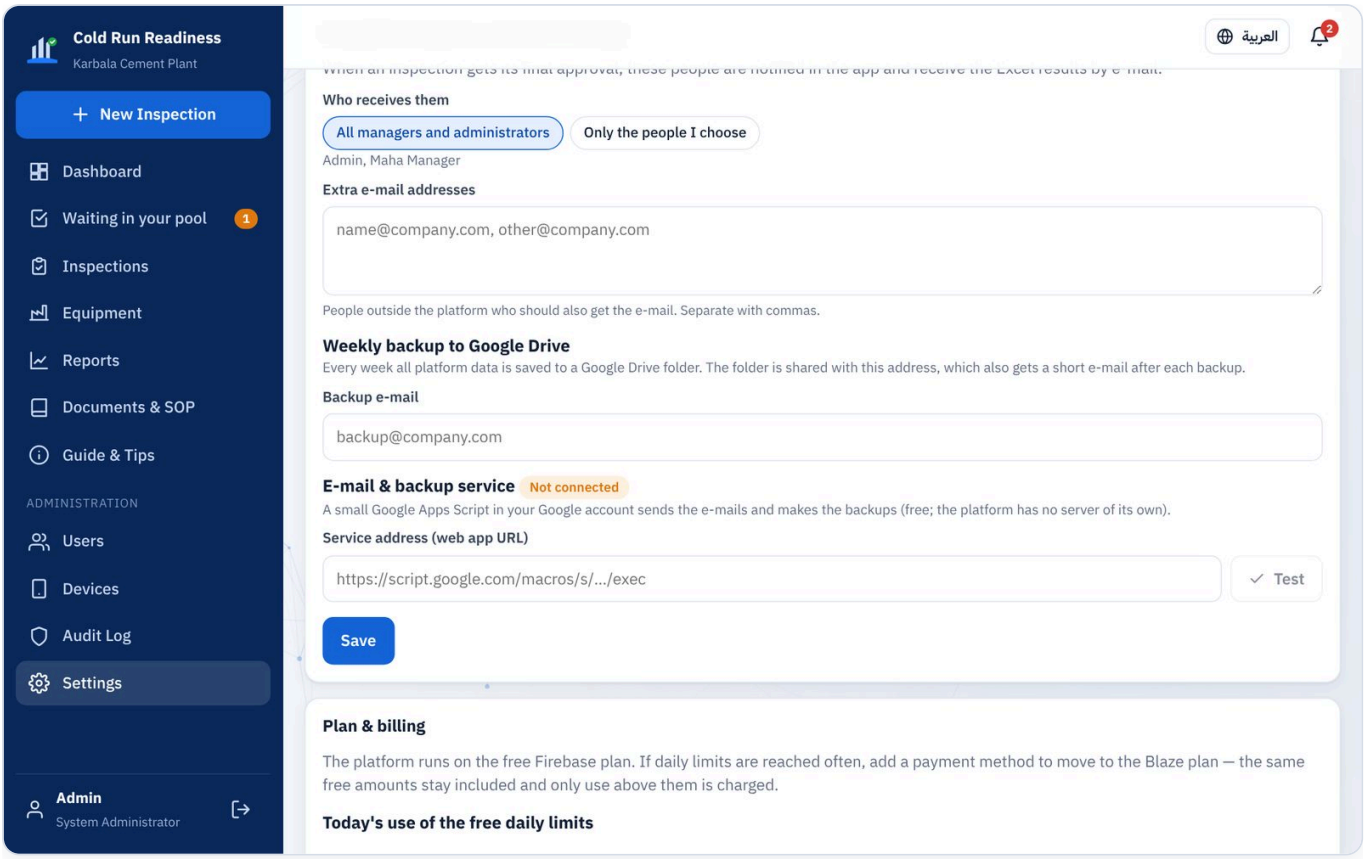


Reports, e-mail and backup settings

One-time setup of the e-mail & backup service

1. Open **script.google.com** → **New project**.
2. Paste **Code.gs** from **platform/email-backup-service**. In Project settings tick "Show appsscript.json" and replace it with the file of the same name.
3. Set **WEB_API_KEY** at the top of Code.gs (the web API key of the Firebase app). Choose **setup** → **Run** and allow the permissions — this schedules the weekly backup (Fridays 02:00) and the usage check (every 30 minutes).
4. **Deploy** → **New deployment** → **Web app**, Execute as **Me**, access **Anyone**. Copy the /exec URL into Settings and press Test.

14 Help inside the platform

Guide & Tips in the menu explains every step for your role, and offers this guide as a PDF. Short tips appear at the top of the main pages; close one with ✕.

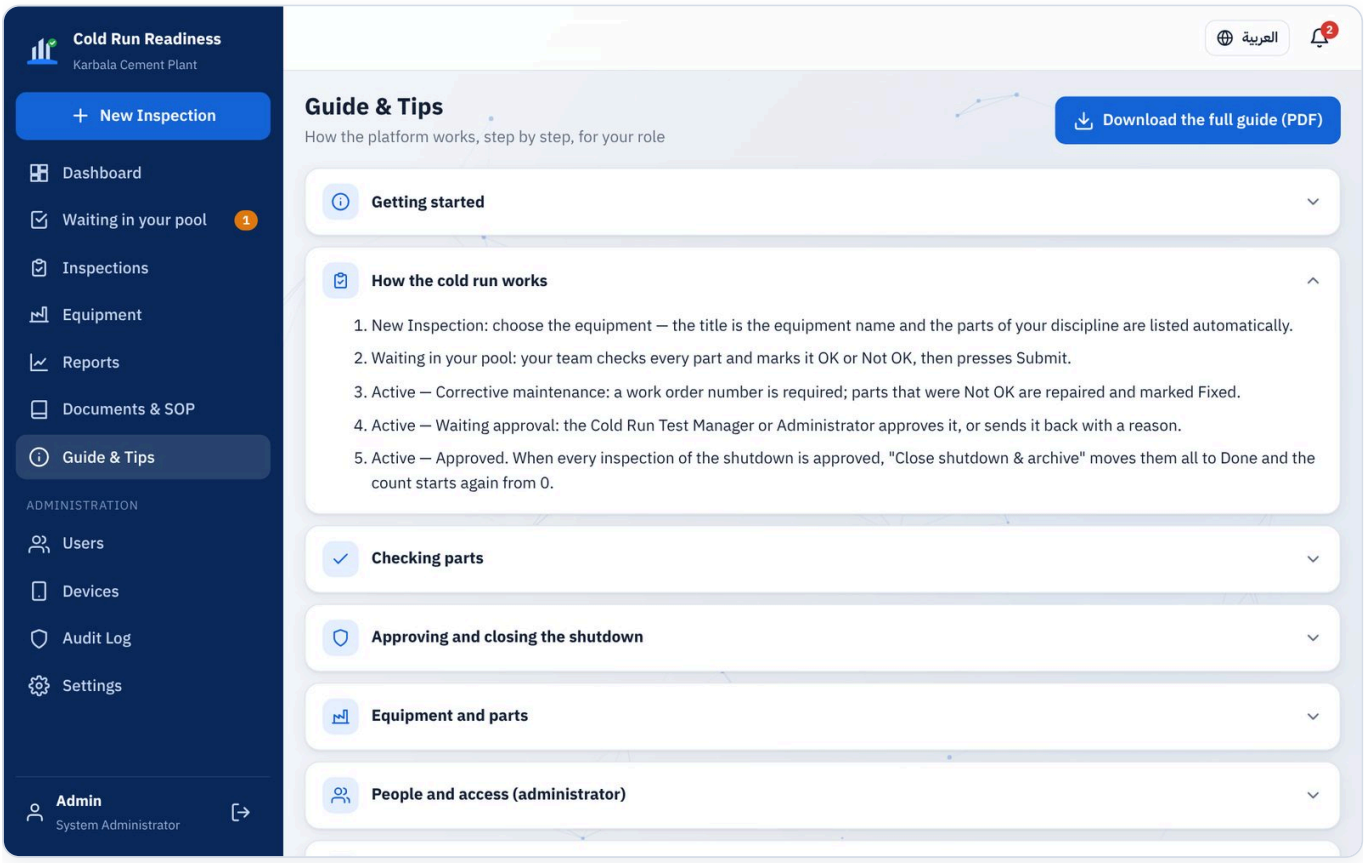

Guide & Tips

15 Good practice

1. Use your own account; on shared tablets sign out at the end of the shift.
2. Describe problems clearly and add photos — they are signed with your name and time.
3. Back online after working without signal? Wait for the sync icon to disappear before closing the app.
4. Managers: close the shutdown only when the cold run is really complete — archiving cannot be undone.
5. To stay on the free plan: delete inspections made by mistake (photos take most of the space) and act on the usage e-mails at 75% and 90%.

> **Important** Starting equipment always follows the plant's LOTO, permit and operating-authorization procedures.

16 Questions and problems

Problem	What to do
"Your account has no profile yet"	Ask the administrator to add you with the exact e-mail you use.
I cannot see any equipment to start	Your department has no equipment with parts of your discipline yet, or your role/department is not set. Ask the manager.
"This inspection already exists"	Your team started it already — it opens so you can continue.
It asks for a work order	Some parts are Not OK: enter the work order number raised for the repair. Without it the inspection cannot go to corrective maintenance.
Submit is greyed out	Some parts are still not checked; the bar at the bottom says how many.
The archive button does not appear	Not every inspection of the shutdown is approved yet.
CSV rows were skipped	The preview says why: unknown department, empty equipment name or unknown part type.
A wrong ✓ or ✕	Tap the highlighted button again to clear the part, then choose again.
I do not see Reports or Settings	Team members see only their own work; reports and settings are for managers and administrators. Your own details are under **My profile**.
The year of the new shutdown is wrong	The administrator presses **Edit** on the shutdown card and sets the name and year.
A usage alert e-mail arrived	Check Settings → Plan & billing. At 90–100% either wait for the daily reset or add a payment method.
No password e-mail	Check spam, use "Forgot password?", or ask the administrator to resend it.